

EPHRAIM MOGALE LOCAL MUNICIPALITY



BID DOCUMENT

TENDER NO. EPMLM/8/3/515

APPOINTMENT OF A CONTRACTOR FOR CONSTRUCTION OF MATLEREKENG SPORTS FACILITY

CIDB GRADING: 6CE OR HIGHER
MARCH 2025

PREPARED FOR	PREPARED BY
THE MUNICIPAL MANAGER EPHRAIM MOGALE LOCAL MUNICIPALITY Private Bag x 111 MARBLE HALL 0450 Tel: (013) 261 8400 Fax: (013) 261 4055	BASHIMANE CONSULTING ENGINEER SUITE No.101, OFFICE PARK 90 SCHOEMAN STREET POLOKWANE 0699

NAME OF BIDDER : _____

CSD SUPPLIER NO : _____

CRS(CIDB) NO : _____

TENDERED AMOUNT (WORDS) : _____

TENDERED AMOUNT (FIGURES) : _____

TEL NUMBER : _____

FAX NUMBER : _____

EPHRAIM LOCAL MUNICIPALITY



EPMLM/8/3/515

Contents

Number | **Heading**

The Tender

Part T1: Tendering procedures

- | | |
|------|--|
| T1.1 | Tender Notice and Invitation to Tender |
| T1.2 | Tender Data |
| T1.3 | Standard Conditions of Tender |

Part T2: Returnable schedules

- | | |
|------|--|
| T2.1 | List of Returnable Documents |
| T2.2 | Returnable Schedules to be completed by tenderer |

The Contract

Part C1: Agreements and Contract Data

- | | |
|------|---|
| C1.1 | Form of Offer and Acceptance |
| C1.2 | Contract Data |
| C1.3 | Form of Guarantee |
| C1.4 | Agreement with Adjudicator |
| C1.5 | Agreement in Terms of Section 37(2) of the Occupational Health and Safety Act No 85 of 1993 |

Part C2: Pricing data

- | | |
|------|----------------------|
| C2.1 | Pricing Instructions |
| C2.2 | Bill of Quantities |

Part C3: Scope of Work

- | | |
|------|---------------------------|
| C3.1 | Standard Specifications |
| C3.2 | Project Specifications |
| C3.3 | Particular Specifications |

Part C4: Site information

- | | |
|------|-----------------|
| C4.1 | Tender Drawings |
|------|-----------------|

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

PART T1: BIDDING PROCEDURES

TABLE OF CONTENTS		Page
T1.1:	BID NOTICE AND INVITATION TO BID	T.2
T1.2:	BID DATA	T.6
T1.3:	STANDARD CONDITIONS OF BID	T.12



EPHRAIM MOGALE LOCAL MUNICIPALITY
APPOINTMENT OF A CONTRACTOR FOR CONSTRUCTION OF
MATLEREKENG SPORTS FACILITY

BID NUMBER: EPMLM/8/3/515

VERY IMPORTANT NOTICE ON DISQUALIFICATIONS:

A bid not complying with the peremptory requirements stated hereunder will be regarded as not being an "Acceptable bid", and as such will be rejected.

The municipality shall adjudicate and award Bids in accordance with the Preferential Procurement Policy Framework Act 5/2000 and revised Preferential Procurement Regulation November 2022 on 100 points functionality and on a 80/20 points system, where 80 points are for the price and 20 points for specific goals according to the said legislation and approved policy. Bids are required to submit the following:

1. Valid Registration with CSD
2. If any pages have been removed from the bid document, and have therefore not been submitted, or a copy of the original bid document has been submitted. Failure to complete the schedule of quantities as required, i.e. only lump sums provided.
3. Scratching out, writing over or painting out rates, without initialling next to the amended rates or information, affecting the evaluation of the bid.
4. Not initialling all the pages including the cover page and drawings.
5. The use of correction fluid (i.e. tippex) or any erasable ink, e.g. pencil.
6. Non-attendance of mandatory/compulsory:
 - Site inspections or;
 - Information/Clarification meetings
7. The Bid has not been properly signed by a party having the authority to do so, according to the example of "Authority for Signatory".
8. No authority for signatory submitted – See example, where it is stated that a duly signed and dated original or certified copy of the company's relevant resolution (**for each specific bid**) of their members or their board of directors, must be submitted.
9. **Very important notice** Bidders must note that only information filled in at the spaces provided therefore in the bid document will be considered for evaluation purposes unless additional space is required and then only if the location of the additional information in the attachments is properly referred to by page number and section heading. Information supplied anywhere else will be disregarded which **may** lead to the rejection of the bid. **The attachment or inclusion of information not specifically asked for is not desirable and lead to delays in the awarding of bids.**
10. **Bidders should also note that all tables and forms should be filled in even if the information is attached in the annexures. Bidder should not write refer to as it will lead to disqualifications.**

4

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

11. The bidder attempts to influence, or has in fact influenced the evaluation and/or awarding of the contract.
12. The bid has been submitted either in the wrong bid box or after the relevant closing date and time.
13. Bidders will be disqualified if any municipal rates and taxes or municipal service charges owed by the bidder and any of its directors to the municipality, or to any other municipality or municipal entity or are in arrears for more than three months.
14. If any bidder who during the last five years has failed to perform satisfactorily on a previous contract with the municipality, municipal entity or any other organ of state after written notice was given to that bidder that performance was unsatisfactory.
15. The accounting officer must ensure that irrespective of the procurement process followed, no award may be given to a person –
 - (a) who is in the service of the state, or;
 - (b) if that person is not a natural person, of which any director, manager, principal shareholder or stakeholder, is a person in the service of the state; or;
 - (c) who is an advisor or consultant contracted with the municipality in respect of contract that would cause a conflict of interest.
16. **Failure to provide: A copy of valid registration with the CIDB, in an appropriate contractor grading designation (category), as required in the bid documentation (or in the case of a joint venture, of all the partners in the joint venture).**
17. Bid offers will be rejected if the bidder or any of his directors is listed on the Register of Bid Defaulters in terms of the Prevention and Combating of Corrupt Activities Act of 2004 as a person prohibited from doing business with the public sector.
18. Bid offers will be rejected if the bidder has abused the EPMLM's Supply Chain Management System and action was taken in terms of paragraph 38 of the EPMLM SCM Policy.
19. If at any time during the project implementation phase the rates or prices are found to be abnormal, irregular and or not market related among other things, the engineer may after written approval from the municipality revise them to a practical or market related rate. The amount on the form of offer will be considered as the final cost of works.
20. Form of offer not completed and signed by the authorised signatory.
21. The letter of intent to issue guaranteed must completed and the letter of guarantee attached
22. All the attachments with certification should not be older than 6 months were required
23. No submission of financial statements or audited financial statements required, unless if the bided amount is above R 10m
24. Complete and sign ALL questionnaires and forms within the bid document.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

NOTE:

IN THIS DOCUMENT AND OTHER DOCUMENTS REFERRED TO BUT NOT ATTACHED, THE FOLLOWING WORDS ARE SYNONYMOUS WITH EACH OTHER.

1. CLIENT, EMPLOYER, EPHRAIM MOGALE LOCAL MUNICIPALITY (EPMLM).
2. BID, BID AND VARIATIONS THEREOF
3. JOINT VENTURE / CONSORTIUM

ENDER

--

Contractor

--

Witness 1

--

Witness 2

--

Employer

--

Witness 1

--

Witness 2

SUMMARY FOR BID OPENING PURPOSES

NAME OF BIDDING ENTITY:

.....

PHYSICAL STREET ADDRESS:	POSTAL ADDRESS:

TELEPHONE NUMBER :

FAX NUMBER :

E-mail ADDRESS :

CONTRACT PRICE : R.....
(Amount brought forward from the Form of Offer and Acceptance) *

Signed by authorised representative of the Bidding Entity:

DATE:

- Should any discrepancy occur between this figure and that stated in the Form of Offer and Acceptance, the latter shall take precedence and apply.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

T1.1: BID NOTICE AND INVITATION TO BID**EPHRAIM MOGALE LOCAL MUNICIPALITY****BID NUMBER: EPMLM/8/3/515**

Bids are hereby invited for the **APPOINTMENT OF A CONTRACTOR FOR CONSTRUCTION OF MATLEREKENG SPORTS FACILITY** in Ephraim Mogale Local Municipality under Sekhukhune District in Limpopo Province.

Bid documents are available from the office of the Cashier's Office, Ephraim Mogale Local Municipality and Etender website: www.etenders.gov.za.

It is estimated that tenderers should have an estimated CIDB contractor grading of **6CE OR HIGHER**

Only bidders who comply with the following requirements are eligible to submit bids:

- Register with CIDB and having an estimated grading of **6CE OR HIGHER**
- Bids will be evaluated on the 80/20 points system.
- Bids will be evaluated on the functionality with a minimum qualifying score of 75 Points.

Criteria	Maximum Weights
Company Experience	40
Plant and Equipment necessary for construction	20
Specific personnel knowledge	30
Bank rating/Financial Standing	10
Total Points for Functionality	100

Only bidders who can demonstrate that they will have in their employ staff which satisfies EPWP requirements during the contract validity are eligible to submit bids.

Bid documents will be obtainable as from Tuesday, **01st April 2025** at the offices of Ephraim Mogale Local Municipality (not on Site, in Marble Hall, upon of a non-refundable amount of **R1200.00** only cash or EFT made out to Ephraim Mogale Local Municipality will be acceptable and from Etender website: www.etenders.gov.za .

A compulsory briefing session will be held in Ephraim Mogale Local Municipality, **on Monday, the 07th of April 2025 at Matlerekeng Pink Hall (Latitudes:24°58'38"S Longitudes:29°04'09"E), 10H00am.**

All bids will remain valid for a period of ninety days (90) after the time and date of opening. Late submissions, telegraphic, telegraphic or e-mail transmission bid will not be accepted. Ephraim Mogale Local Municipality does not bind itself to accept the lowest or any bid and reserves the right to accept a bid as a whole or in part.


All bids and supporting documents must be sealed in a cover clearly marked "**BID No. EPMLM/8/3/515: APPOINTMENT OF A CONTRACTOR FOR CONSTRUCTION OF MATLEREKENG SPORTS FACILITY**" and must be deposited in the bid box at **ground floor Finance Department, Ephraim Mogale Local Municipality, Marble Hall, not later than 12:00 on Monday 05th May 2025.**

Supply Chain Management related enquiries can be directed to Mr. J. Madisha from the procurement office of Ephraim Mogale Local Municipality on 013 2618400 /8450/8462/8496/8448/8541/ephmlmsupplychain@emogalelm.gov.za. Technical related enquiries can be directed to Mr. S Marima from Project Management Unit office of Ephraim Mogale Local Municipality on 013 261 8471.


MOROPA M.E
MUNICIPAL MANAGER




Contractor




Witness 1




Witness 2



Employer



Witness 1



Witness 2

T1.2: BID DATA

The Conditions of bid in the Standard Conditions of bid as contained in Annex F of SANS 294 – *Construction Procurement Processes, Methods and Procedures* contains references to the bid Data for details that apply specifically to this bid.

The BID Data shall be read with the Standard Conditions of bid in order to expand on the Bidder's obligations and the Employer's undertakings in administering the bid process in respect of the project under consideration.

The BID Data hereafter shall have precedence in the interpretation of any ambiguity or inconsistency between it and the Standard Conditions of bid.

Each item of bid Data given below is cross-referenced to the relevant clause in the standard Conditions of BID.

F.1.1 The Employer for this Contract is: **EPHRAIM MOGALE LOCAL MUNICIPALITY.**

F.1.2 Bid Documents

The Bid Document consists of the following:

BID

Part T1: Bidding Procedures

Part T2: Returnable Documents

CONTRACT

Part C1: Agreements and Contract Data

Part C2: Pricing Data

Part C3: Scope of Work

Part C4: Site Information

DRAWINGS

The bid Document with the drawings shall be obtained from the Employer or his authorized representative at the physical addresses stated in the bid notice, upon payment of the deposit stated.

F.1.4 The Employer's agent is:

Name : Mr. S Marima

Telephone : (013) 261 8471

Fax: (013) 261 8400

F.1.5 The Employer's right to accept or reject any bid offer

The Employer is not obliged to accept the lowest or any bid offer.

F.2.1 Eligibility

A bidder will not be eligible to submit a bid if:

- (a) The Contractor submitting the bid is under restrictions or has principals who are under restriction to participate in the Employer's procurement due to corrupt or fraudulent practices.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

- (b) The bidder does not have the legal capacity to enter the contract.
- (c) The Contractor submitting the BID is insolvent, in receivership, bankrupt or being wound up, has his affairs administered by a court or a judicial officer, has suspended his business activities, or is subject to legal proceedings in respect of the foregoing.
- (d) The bidder does not comply with the legal requirements stated in the Employer's procurement policy.
- (e) The bidder cannot demonstrate that he possesses the necessary professional and technical qualifications and competent, financial resources, equipment and other physical facilities, managerial capability, personnel, experience, and reputation to perform the contract.
- (f) The Bidder cannot provide proof that he is in good standing with respect to duties, taxes, levies, and contributions required in terms of legislation applicable to the work in the contract.

Only those bidders who are registered with the Construction Industry Development Board (CIDB) in a contractor-grading equal to or higher than a contractor grading designation **6CE OR HIGHER** or higher **6CE OR HIGHER** or a combined grading (in the case of a joint venture) equal or higher than **6CE OR HIGHER** as defined in the Regulations (09 August 2004 and 22 July 2005), in terms of the CIDB Act No 38 of 2000, are eligible to submit BIDs for this contract.

F.2.1	Only those Bidders who have in their employ management and supervisory staff satisfying the requirements of the scope of work for labour intensive competencies for Supervisory and management staff are eligible to submit bids.
F.2.18	The Bidder shall, when requested by the Employer to do so, submit the names of all Management and supervisory staff that will be employed to supervise the labor-intensive portion of the works together with satisfactory evidence that such staff members satisfy the eligibility requirements.

F.2.7 Site visit and clarification meeting

The arrangements for the compulsory clarification meeting are as stated in the Bid Notice and Invitation to bid.

F.2.10 Pricing the bid offer

(a) Value Added Tax

- The Valued Added Tax (VAT) rate shall be 15% or as otherwise provided for by legislation.
- The successful bidder shall be required to produce a VAT invoice that shall only be prepared once measurements and valuations for work done in terms of the contract offer have been agreed with the Employers agent and a certificate of payment issued.
- Payment of VAT to non-VAT vendors shall be processed from the month in which the bidder's liability with the South African Revenue Services is effective.

F.2.11 Alterations to document

A BID offer shall not be considered if alterations have been made to the forms of bid data or contract data (unless such alterations have been duly authenticated by the bidder) or if any particulars required therein have not been completed in all respects.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

F.2.12 Alternative bid offers

No alternative offers will be considered.

F.2.13 Submitting a bid Offer.

F.2.13.1 No Bidder may submit more than one Bid as set out in this clause in the Standard Conditions of Bid

F.2.13.3 Bid offers shall be submitted as an original only.

Under no circumstances whatsoever may the bid forms be retyped or redrafted.

Photocopies of the original bid documentation may be used, but an original signature must appear on such photocopies.

F.2.15 Closing Time

The closing time for submission of bid Offers is: 12:00 hrs. On **05th of May 2025**. Telephonic, telegraphic, telex, facsimile, electronic or e-mailed BIDs will not be accepted.

F.2.16 Bid offer validity

The bid Offer validity period is 90 days from the closing time for submission of bids.

F.2.17 The Bided lump sums and rates shall be final and binding irrespective of the total Bid price

F.2.19 Access

Access shall be provided for inspections and testing by personnel acting on behalf of the Employer.

F.2.22 Return of bid Documents

Not applicable.

F.2.23 Certificates

The bidder is required to submit with his bid the following Mandatory documents:

- Valid Proof of registration with CIDB
- Joint Venture Agreement and Power of Attorney in case of Joint Ventures.
- Certified Copies of Appointment letters and Completion certificate of relevant project
- Valid proof of registration with the compensation for occupational injuries and Diseases Act (COIDA)
- Municipal Account not older than 3 months for both directors and company

Additional Mandatory requirements

The Municipality adheres to all the acts relevant to procurements of goods and/or Services and its supply chain management policy. The Prescriptions of the Constitution and industry Development Board (CIDB) will apply.

F.3.4 Opening of bid Submissions

The time and location for opening of the **bid** offers are:

Time : 12:00 hrs. Date: **05th of May 2025**

Location: Finance **Building, Marble Hall: EPHRAIM MOGALE LOCAL MUNICIPALITY**

Bid box,
Tel No (013) 261 8400

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

F.3.5 The two-envelope system will **not** apply to this bid.

F.3.11 Evaluation of bid Offers

Bidders will be evaluated on quality, price, and preference. It is important that the relevant information is included to enable the Technical Proposal to be evaluated in accordance with the procedure outlined below. All information must be submitted in a separate file. Tampering with the original Bid document will render the Bid non-responsive. Failure to comply with the above requirements will result in the Bid being disqualified.

The Bid evaluation will be conducted as follows:

1(a) First

Bid documents that have been disassembled and copies of the Bid documents will be disqualified outright.

1(b) Second

Bidders will be checked for compliance with Bid Conditions and administrative responsiveness. Non-compliance with any of the requirements will render the Bid non-responsive and it will not be carried forward to the next stage. (refer to 2(a) below).

1(c) Third

The Bidder's experience, staffing and methodology will be evaluated. Each Bid will be assessed and awarded points for Functionality. **Failure to achieve 75 Points out of the 100 for Functionality will render the Bid non-responsive.**

Only Bidders that score the specified minimum number of points for Functionality will be deemed to be acceptable and carried forward to the next stage. The rest will be disqualified. The points for functionality will not be carried forward to the remainder of the evaluation. (refer to 2(b) below)

1(d) Fourth

Points will be calculated for price on the relevant prices in accordance with the preference point system, 90/10 or 80/20. (Refer to 2(c) below)

1(e) Fifth

Points for specific goal will be awarded in accordance with EPMLM approved policy as per the amended Preferential Procurement regulations, 2022. refer to 2(d) below)

1(f) Final

The Bid will be awarded to the short-listed Bidder who has scored the highest points for price and specific goals, unless there are justifiable, objective reasons to award the Bid to another Bidder. However, the Employer retains the right not to accept any Bid. Refer to (2e) below)

2(a) Compliance with Bid Conditions and other Requirements

The Bid will be checked to ensure that they comply with the Bid Conditions and all other requirements of the project document. In particular, the following documentation must be completed, signed, and included in the Bid:

- a) Certificate of attendance at site inspection, to be signed onsite inspection attendance register.
- b) Certificate of Authority for Signature. For JV's a JV Agreement shall be provided (if applicable)
- c) Record of addenda to Bid documents.
- d) Certificate of non- collusive Bid

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

- e) Compliance with Occupational Health and Safety Act
- f) Compulsory enterprise questionnaire.
- g) Financial details, statements, and bank references.
- h) Declaration of bidder's past supply chain management practices.
- i) Declaration of interest
- j) Construction industries development board registration.
- k) Form C1.1 – Form of Offer and Acceptance
- l) Contract Data Section 2: Data provided by the contractor.

Failure to comply with the Bid Conditions or to supply the necessary information at Bid closure **WILL** result in the Bid being rejected. Non submission of any of the forms listed above will result in the Bid being rejected as non-responsive.

2(b) Second Stage in Evaluation: Quality or Functionality: Points System

A brief description of the scoring system is given below. A tabulated score sheet which will be used in the evaluation is as shown below.

The Bidder must be able to demonstrate that he understands the project and the various tasks required. Innovative solutions will be viewed favourably. For a definition of all terms, refer to Scope of Works. Bidders' submissions will be evaluated based on compliance with the following criteria to determine the responsiveness to the bid requirements:

- I. Organogram and CV's for key personnel
- II. Capability statement of the company regarding this type of work in general, and the Specifications of this bid. Provide project descriptions of similar completed projects, highlighting similarities between the completed projects and the specifications of this project. Highlight experience with similar projects in South Africa for similar electrical distribution authorities in the past 5 years. Provide contact details of employers for these projects. Points will be awarded for each project completed that is at least one grading lower than the CIDB grading called for this project.
- III. Plant and equipment: Indicate own and hired equipment, clearly indicating equipment to be used specifically for this project.
- IV. Bank rating: Bidder's bank to complete the included form

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

Functionality

The bid will be subjected to functionality evaluation as per below criteria. Bidders will be required to obtain a minim qualifying score of **75 points** out of **100** to be further evaluated for price and preferential points.

Functionality for Contractor					Points Allocation
Company Experience for Construction Service in sports facility Projects [attach Appointment Letters and Completion Certificates]					40
No.	List reference with details			Maximum points (40)	
1.	Completed projects with value of above R10m			10 points each project	
2.	Completed projects with value of R6m to R10m			5 points each project	
3.	Completed projects with value of less than R6m			3 points each project	
The tenderer to attach 4 largest appointment letters & their respective completion certificates. Failure to submit the required Appointment Letters and Completion Certificates for each project signed by all parties namely: The Employer, the Contractor, and the Engineer, will result in the bidder getting zero points.					
Management and Key Staff					
Project Manager-Team Leader [Max 12 points]					
Qualification (Civil Engineering)		Experience		SACPCMP professional registration	
		Less than 10 yrs	10 yrs & above		
NQF level 6	1	0	1	4	
NQF Level 7	2	1	2	4	
NQF level 8 & 9	4	2	4	4	
Site Agent [Max 9 Points]					
Qualification (Civil Engineering)		Experience		ECSA Professional registration	
		Less than 10 yrs	10 yrs & above		
NQF level 6	1	1	2	3	
NQF Level 7	2	1	2	3	
NQF level 8 & 9	3	2	3	3	
Site Foreman [Max 5 Points]					
Qualification (Civil Engineering)		Experience			
		Less than 10yrs	10 yrs & above		
NQF level 6	1	1	2		
NQF Level 7 & above	3	1	2		

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

	Safety Officer [Max 4 Points] 0: No formal qualification 2: Relevant safety qualification with less than 5 years' experience 4: Relevant safety qualifications with 5 years' experience and more *Bidders to attach proof qualifications (certified copies not older than six months), CV, ECSA & SACPCMP registrations where applicable, to claim points. Failure to attach proof will result in the bidder getting zero for ECSA/SACPCMP, qualifications and Experience where applicable. *Bidders to attach SAQA accreditation in case of foreign qualification. Failure to attach proof will result in the bidder getting zero points for qualification.																												
	List of Plant <table border="1"> <thead> <tr> <th>Required Plant</th> <th>Points</th> <th>Score</th> </tr> </thead> <tbody> <tr> <td>1xTLB</td> <td>3</td> <td></td> </tr> <tr> <td>1 x Water cart</td> <td>3</td> <td></td> </tr> <tr> <td>1x Tipper truck</td> <td>2</td> <td></td> </tr> <tr> <td>1 x Excavator</td> <td>4</td> <td></td> </tr> <tr> <td>1 x Motor Grader</td> <td>4</td> <td></td> </tr> <tr> <td>1 x LDV</td> <td>1</td> <td></td> </tr> <tr> <td>1 x Roller Compactor</td> <td>3</td> <td></td> </tr> <tr> <td>TOTAL</td> <td>20</td> <td></td> </tr> </tbody> </table> List of plant- Tenderer to submit proof of ownership with certified copies not older than Six months. And in the case of hiring, a letter of intent must be submitted with proof of ownership and certified copies not older than six months.	Required Plant	Points	Score	1xTLB	3		1 x Water cart	3		1x Tipper truck	2		1 x Excavator	4		1 x Motor Grader	4		1 x LDV	1		1 x Roller Compactor	3		TOTAL	20		20
Required Plant	Points	Score																											
1xTLB	3																												
1 x Water cart	3																												
1x Tipper truck	2																												
1 x Excavator	4																												
1 x Motor Grader	4																												
1 x LDV	1																												
1 x Roller Compactor	3																												
TOTAL	20																												
	Financial Capacity <table border="1"> <thead> <tr> <th>Bank rating</th> <th>Weighting</th> <th>Score</th> </tr> </thead> <tbody> <tr> <td>Bank rating =A and B</td> <td>10</td> <td></td> </tr> <tr> <td>Bank rating =C</td> <td>8</td> <td></td> </tr> <tr> <td>Bank rating =D</td> <td>5</td> <td></td> </tr> <tr> <td>Bank rating =E</td> <td>2</td> <td></td> </tr> <tr> <td>Bank rating =F to G</td> <td>0</td> <td></td> </tr> <tr> <td>Total</td> <td>10</td> <td></td> </tr> </tbody> </table> Ability of the worker to finance working capital requirement before the first claim is paid by the client. The tenderer to submit a letter from the bank indicating the bank rating.	Bank rating	Weighting	Score	Bank rating =A and B	10		Bank rating =C	8		Bank rating =D	5		Bank rating =E	2		Bank rating =F to G	0		Total	10		10						
Bank rating	Weighting	Score																											
Bank rating =A and B	10																												
Bank rating =C	8																												
Bank rating =D	5																												
Bank rating =E	2																												
Bank rating =F to G	0																												
Total	10																												
	Total Points Achievable	100																											
	Minimum Score Required	75																											

It is important that the Bidder provides information as requested as this information will be used for functionality in which a **minimum of 75 points** must be scored to move to the next stage of evaluation. The scoring will be according to the table below.

Bidders must score a minimum of 75 percentage points out of the 100 percentage to qualify for further evaluation.

15

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

2(c) Fourth Stage in Evaluation: Price

The following must be completed in full.

- * The pricing schedule.
- * The form of offer. No alterations, subtractions or additions may be made to the items in the pricing schedule. All items must be priced or calculated.

A total of 90 points will be awarded to the Bid with the lowest balanced price. The other Bidders will be awarded points based on the ratio of the price under consideration to the lowest price.

$$P_s = 80 \left(1 - \frac{P_t - P_{min}}{P_{min}} \right)$$

where

- P_s = Points scored for comparative price of bid under consideration
 P_t = Comparative price of bid under consideration
 P_{min} = Comparative price of lowest acceptable bid

2(d) Fifth Stage in Evaluation: Specific goal (Ph)

The Bidders will then be evaluated in terms of the Construction industry scorecard and the PPPFA, 2000 (Act No 5 of 2000); Preferential Procurement regulation, government gazette no 47452 issued on 4 of November 2022 with the values of Ph indicated as the number of points for specific goals shown below.

80/20		
Preference Points for specific goals	Means of Verification	Number of Points
At least 51% Black ownership	Identification documents / CSD Report / CIPC Certificate	10
At least 51% Women Ownership	Identification document / CSD Report / CIPC Certificate	5
At least 51% People with Disability	Medical Report indicating disability	3
At least 51% Youth ownership (18 to 35 Years of age)	Identification document / CSD Report / CIPC Certificate	2

2(e) Final Stage in Evaluation : Calculation of Final Total Points

The final score or final total points for each Bid will be calculated by adding the scores from the; calculations.

$$P = P_s + P_h$$

F.3.13 Acceptance of bid Offer**F.3.13.1 Bid offers will only be accepted on condition that:**

- (a) the bid offer is signed by a person authorized to sign on behalf of the Bidder;
- (b) a valid original Tax Clearance Certificate is included with his bid;
- (c) the bidder's declaration of compliance with the Occupational Health and Safety Act No.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

85 of 1993 and the Construction Regulations 2014, is included with his bid submission.

- (d) a bidder who submitted a bid as a Joint Venture has included an acceptable Joint Venture Agreement with his bid.
- (e) the bidder or a competent authorized representative of the contractor who submitted the bid has attended the compulsory clarification meeting or site inspection.
- (f) the contractor who submits the bid has been registered with the Construction Industry Development Board in accordance with the Construction Industry Development Board Act No. 38 of 2000 and the CIDB Regulations 2003 promulgated in terms of the Act, or if the contractor can submit proof or evidence that he will be able to register within 10 days of the closing date for submission of bids.
- (g) the bidder or any of its principals is not listed on the register of bid Defaulters in terms of the Prevention and Combating of Corrupt Activities Act of 2004 as a person prohibited from doing business with the public sector.
- (h) the bidder has not abused the Employer's Supply Chain Management System or has failed to perform on any previous contract and has been given a written notice to this effect.
- (i) the bidder or any of its principals, directors or managers is not employed in the service of the State or any municipality. In the event that such principals are involved, official approval from the Executing Authority regarding carrying out remunerative work outside of the public service must be included in the BID submission.
- (j) the employer is satisfied that the bidder or any of his principals have not influenced the BID offer and acceptance by the following criteria:
 - a. having offered, promised or given a bribe or other gift or remuneration to any person in connection with the obtaining or execution of this Contract;
 - b. having acted in a fraudulent or corrupt manner in obtaining or executing this Contract;
 - c. having approached an officer or employee of the Employer or the Employer's Agent with the objective of influencing the award of a Contract in the bidder's favour;
 - d. having entered into any agreement or arrangement, whether legally binding or not, with any other person, firm or company to refrain from Bidding for this Contract or as to the amount of the BID to be submitted by either party;
 - e. having disclosed to any other person, firm or company other than the Employer, the exact or approximate amount of his proposed bid;
 - f. the employer may, in addition to using any other legal remedies, repudiate the bid offer and acceptance and declare the Contract invalid should it have been concluded already.

F.3.18 Copies of Contract

The number of paper copies of the signed contract to be provided by the Employer is ONE.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

T1.3: STANDARD CONDITIONS OF BID

(As contained in Annexure F of the CIDB Standard for Uniformity in Construction Procurement)

F.1 General

F.1.1 Actions

The employer and each bidder submitting a bid offer shall comply with these conditions of bid. In their dealings with each other, they shall discharge their duties and obligations as set out in F.2 and F.3, timeously and with integrity, and behave equitably, honestly, and transparently.

F.1.2 Bid Documents

The documents issued by the employer for the purpose of a bid offer are listed in the bid data.

F.1.3 Interpretation

F.1.3.1 The bid data and additional requirements contained in the bid schedules that are included in the returnable documents are deemed to be part of these conditions of bid.

F.1.3.2 These conditions of bid, the bid data and bid schedules which are only required for bid evaluation purposes, shall not form part of any contract arising from the invitation to bid.

F.1.3.3 For the purposes of these conditions for the calling for expressions of interest, the following definitions apply:

- a) **Comparative offer** means the bidder's financial offer after the factors of non-firm prices, all unconditional discounts and any other bided parameters that will affect the value of the financial offer have been taken into consideration.
- b) **corrupt practice** means the offering, giving, receiving, or soliciting of anything of value to influence the action of the employer or his staff or agents in the bid process; and
- c) **Fraudulent practice** means the misrepresentation of the facts to influence the bid process or the award of a contract arising from a bid offer to the detriment of the employer, including collusive practices intended to establish prices at artificial levels.
- d) **Quality (functionality)** means the totality of features and characteristics of a product or service that bear on its ability to satisfy stated or implied needs.

F.1.4 Communication and employer's agent

Each communication between the employer and a bidder shall be to or from the employer's agent only, and in a form that can be read, copied, and recorded. Writing shall be in the English language. The employer shall not take any responsibility for non-receipt of communications from or by a bidder. The name and contact details of the employer's agent are stated in the bid data.

F.1.5 The employer's right to accept or reject any bid offer

F.1.5.1 The employer may accept or reject any variation, deviation, bid offer, or alternative bid offer, and may cancel the bid process and reject all bid offers at any time before the formation of a contract. The employer shall not accept or incur any liability to a bidder for such cancellation and rejection but will give written reasons for such action upon written request to do so.

F.1.5.2 The employer may not subsequent to the cancellation or abandonment of a bid process or the rejection of all responsive bid offers re-issue a bid covering substantially the same scope of work within a period of six months unless only one bid was received and such bid was returned unopened to the bidder.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

F.2 Bidder's obligations**F.2.1 Eligibility**

Submit a bid offer only if the bidder complies with the criteria stated in the bid data and the bidder, or any of his principals, is not under any restriction to do business with employer.

F.2.2 Cost of bidding

Accept that the employer will not compensate the bidder for any costs incurred in the preparation and submission of a bid offer, including the costs of any testing necessary to demonstrate that aspects of the offer satisfy requirements.

F.2.3 Check documents

Check the bid documents on receipt for completeness and notify the employer of any discrepancy or omission.

F.2.4 Confidentiality and copyright of documents

Treat as confidential all matters arising in connection with the bid. Use and copy the documents issued by the employer only for the purpose of preparing and submitting a bid offer in response to the invitation.

F.2.5 Reference documents

Obtain, as necessary for submitting a bid offer, copies of the latest versions of standards, specifications, conditions of contract and other publications, which are not attached but which are incorporated into the bid documents by reference.

F.2.6 Acknowledge addenda

Acknowledge receipt of addenda to the bid documents, which the employer may issue, and if necessary, apply for an extension to the closing time stated in the bid data, in order to take the addenda into account.

F.2.7 Clarification meeting

Attend, where required, a clarification meeting at which bidders may familiarize themselves with aspects of the proposed work, services or supply and raise questions. Details of the meeting(s) are stated in the bid data.

F.2.8 Seek clarification

Request clarification of the bid documents, if necessary, by notifying the employer at least five working days before the closing time stated in the bid data.

F.2.9 Insurance

Be aware that the extent of insurance to be provided by the employer (if any) may not be for the full cover required in terms of the conditions of contract identified in the contract data. The bidder is advised to seek qualified advice regarding insurance.

F.2.10 Pricing the bid offer

F.2.10.1 Include in the rates, prices, and the bided total of the prices (if any) all duties, taxes (except Value Added Tax (VAT)), and other levies payable by the successful bidder, such duties, taxes and levies being those applicable 14 days before the closing time stated in the bid data.

F.2.10.2 Show VAT payable by the employer separately as an addition to the bidder's total of the prices.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

F.2.10.3 Provide rates and prices that are fixed for the duration of the contract and not subject to adjustment except as provided for in the conditions of contract identified in the contract data.

F.2.10.4 State the rates and prices in Rand unless instructed otherwise in the bid data. The conditions of contract identified in the contract data may provide for part payment in other currencies.

F.2.11 Alterations to documents

Not make any alterations or additions to the bid documents, except to comply with instructions issued by the employer, or necessary to correct errors made by the bidder. All signatories to the bid offer shall initial all such alterations. Erasures and the use of masking fluid are prohibited.

F.2.12 Alternative bid offers

F.2.12.1 Submit alternative bid offers only if a main bid offer, strictly in accordance with all the requirements of the bid documents, is also submitted. The alternative bid offer is to be submitted with the main bid offer together with a schedule that compares the requirements of the bid documents with the alternative requirements the bidder proposes.

F.2.12.2 Accept that an alternative bid offer may be based only on the criteria stated in the bid data or criteria otherwise acceptable to the employer.

F.2.13 Submitting a bid offer

F.2.13.1 Submit a bid offer to provide the whole of the works, services or supply identified in the contract data and described in the scope of works, unless stated otherwise in the bid data.

F.2.13.2 Return all returnable documents to the employer after completing them in their entirety, either electronically (if they were issued in electronic format) or by writing in black ink.

F.2.13.3 Submit the parts of the bid offer communicated on paper as an original plus the number of copies stated in the bid data, with an English translation of any documentation in a language other than English, and the parts communicated electronically in the same format as they were issued by the employer.

F.2.13.4 Sign the original and all copies of the bid offer where required in terms of the bid data. The Employer will hold all authorized signatories liable on behalf of the bidder. Signatories for bidders Proposing to contract as joint ventures shall state which of the signatories is the lead partner whom the employer shall hold liable for the purpose of the bid offer.

F.2.13.5 Seal the original and each copy of the bid offer as separate packages marking the packages as "ORIGINAL" and "COPY". Each package shall state on the outside the employer's address and Identification details stated in the bid data, as well as the bidder's name and contact address.

F.2.13.6 Where a two-envelope system is required in terms of the bid data, place and seal the returnable documents listed in the bid data in an envelope marked "financial proposal" and place the remaining returnable documents in an envelope marked "technical proposal". Each envelope shall state on the outside the employer's address and identification details stated in the bid data, as well as the bidder's name and contact address.

F.2.13.7 Seal the original bid offer and copy packages together in an outer package that states on the outside only the employer's address and identification details as stated in the bid data.

F.2.13.8 Accept that the employer shall not assume any responsibility for the misplacement or premature opening of the bid offer if the outer package is not sealed and marked as stated.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

F.2.14 Information and data to be completed in all respects

Accept that bid offers, which do not provide all the data or information requested completely and in the form required, may be regarded by the employer as non-responsive.

F.2.15 Closing time

F.2.15.1 Ensure that the employer receives the bid offer at the address specified in the bid data not later than the closing time stated in the bid data. Proof of posting shall not be accepted as proof of delivery. The employer shall not accept bid offers submitted by telegraph, telex, facsimile or e-mail, unless stated otherwise in the bid data.

F.2.15.2 Accept that, if the employer extends the closing time stated in the bid data for any reason, the requirements of these conditions of bid apply equally to the extended deadline.

F.2.16 Bid offer validity

F.2.16.1 Hold the bid offer(s) valid for acceptance by the employer at any time during the validity period stated in the bid data after the closing time stated in the bid data.

F.2.16.2 If requested by the employer, consider extending the validity period stated in the bid data for an agreed additional period.

F.2.17 Clarification of bid offer after submission

Provide clarification of a bid offer in response to a request to do so from the employer during the evaluation of bid offers. This may include providing a breakdown of rates or prices and correction of arithmetical errors by the adjustment of certain rates or item prices (or both). No change in the total of the prices or substance of the bid offer is sought, offered, or permitted. The total of the prices stated by the bidder shall be binding upon the bidder.

Note: Sub-clause F.2.17 does not preclude the negotiation of the final terms of the contract with a preferred bidder following a competitive selection process, should the Employer elect to do so.

F.2.18 Provide other material

F.2.18.1 Provide, on request by the employer, any other material that has a bearing on the bid offer, the bidder's commercial position (including notarized joint venture agreements), preferencing arrangements, or samples of materials, considered necessary by the employer for the purpose of a full and fair risk assessment. Should the bidder not provide the material, or a satisfactory reason as to why it cannot be provided, by the time for submission stated in the employer's request, the employer may regard the bid offer as non-responsive.

F.2.18.2 Dispose of samples of materials provided for evaluation by the employer, where required.

F.2.19 Inspections, tests and analysis

Provide access during working hours to premises for inspections, tests and analysis as provided for in the bid data.

F.2.20 Submit securities, bonds, policies, etc.

If requested, submit for the employer's acceptance before formation of the contract, all securities, bonds, guarantees, policies and certificates of insurance required in terms of the conditions of contract identified in the contract data.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

F.2.21 Check final draft

Check the final draft of the contract provided by the employer within the time available for the employer to issue the contract.

F.2.22 Return of other bid documents

If so instructed by the employer, return all retained bid documents within 28 days after the expiry of the validity period stated in the bid data.

F.2.23 Certificates

Include in the bid submission or provide the employer with any certificates as stated in the bid data.

F.3 The employer's undertakings**F.3.1 Respond to clarification**

Respond to a request for clarification received up to five working days prior to the bid closing time stated in the Bid Data and notify all bidders who drew procurement documents.

F.3.2 Issue Addenda

If necessary, issue addenda that may amend or amplify the bid documents to each bidder during the period from the date of the Bid Notice until seven days before the bid closing time stated in the Bid Data. If, as a result a bidder applies for an extension to the closing time stated in the Bid Data, the Employer may grant such extension and, will then notify it to all bidders who drew documents.

F.3.3 Return late bid offers

Return bid offers received after the closing time stated in the Bid Data, unopened, (unless it is necessary to open a bid submission to obtain a forwarding address), to the bidder concerned.

F.3.4 Opening of bid submissions

F.3.4.1 Unless the two-envelope system is to be followed, open valid bid submissions in the presence of bidders' agents who choose to attend at the time and place stated in the bid data. Bid submissions for which acceptable reasons for withdrawal have been submitted will not be opened.

F.3.4.2 Announce at the opening held immediately after the opening of bid submissions, at a venue indicated in the bid data, the name of each bidder whose bid offer is opened, the total of his prices, preferences claimed and time for completion, if any, for the main bid offer only.

F.3.4.3 Make available the record outlined in F.3.4.2 to all interested persons upon request.

F.3.5 Two-envelope system

F.3.5.1 Where stated in the bid data that a two-envelope system is to be followed, open only the technical proposal of valid bids in the presence of bidders' agents who choose to attend at the time and place stated in the bid data and announce the name of each bidder whose technical proposal is opened.

F.3.5.2 Evaluate the quality of the technical proposals offered by bidders, then advise bidders who remain in contention for the award of the contract of the time and place when the financial proposals will be opened. Open only the financial proposals of bidders, who score in the quality evaluation above the minimum number of points for quality stated in the bid data, and announce

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

the score obtained for the technical proposals and the total price and any preferences claimed. Return unopened financial proposals to bidders whose technical proposals failed to achieve the minimum number of points for quality.

F.3.6 Non-disclosure

Not disclose to bidders, or to any other person not officially concerned with such processes, information relating to the evaluation and comparison of bid offers, the final evaluation price and recommendations for the award of a contract, until after the award of the contract to the successful bidder.

F.3.7 Grounds for rejection and disqualification

Determine whether there has been any effort by a bidder to influence the processing of bid offers and instantly disqualify a bidder (and his bid offer) if it is established that he engaged in corrupt or fraudulent practices.

F.3.8 Test for responsiveness

Determine, on opening and before detailed evaluation, whether each bid offer properly received:

- a) Meets the requirements of these Conditions of Bid,
- b) Has been properly and fully completed and signed, and
- c) is responsive to the other requirements of the bid documents.

A responsive bid is one that conforms to all the terms, conditions, and specifications of the bid documents without material deviation or qualification. A material deviation or qualification is one which, in the Employer's opinion, would:

- Detrimently affect the scope, quality, or performance of the works, services or supply identified in the Scope of Work,
- change the Employer's or the bidder's risks and responsibilities under the contract, or
- affect the competitive position of other bidders presenting responsive bids, if it were to be rectified.

Reject a non-responsive bid offer, and not allow it to be subsequently made responsive by correction or withdrawal of the non-conforming deviation or reservation.

F.3.9 Arithmetical errors

Check responsive bid offers for arithmetical errors, correcting them in the following manner:

- Where there is a discrepancy between the amounts in figures and in words, the amount in words shall govern.
- If a bill of quantities (or schedule of rates) apply and there is an error in the line item total resulting from the product of the unit rate and the quantity, the line item total shall govern and the rate shall be corrected. Where there is an obviously gross misplacement of the decimal point in the unit rate, the line item total as quoted shall govern, and the unit rate will be corrected.
- Where there is an error in the total of the prices either as a result of other corrections required by this checking process or in the bidder's addition of prices, the total of the prices shall govern and the bidder will be asked to revise selected item prices (and their rates if a bills of quantities applies) to achieve the bided total of the prices.

Consider the rejection of a bid offer if the bidder does not correct or accept the correction of his arithmetical errors in the manner described above.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

F.3.10 Clarification of a bid offer

Obtain clarification from a bidder on any matter that could give rise to ambiguity in a contract arising from the bid offer.

F.3.11 Evaluation of bid offers**F3.11.1 General**

Appoint an evaluation panel of not less than three persons. Reduce each responsive bid offer to a comparative offer and evaluate it using the bid evaluation method that is indicated in the Bid Data and described below:

Method 1: Financial offer	1) Rank bid offers from the most favourable to the least favourable comparative offer. 2) Recommend highest ranked bidder for the award of the contract, unless there are compelling and justifiable reasons not to do so.
Method 2: Financial offer and preferences	1) Score bid evaluation points for financial offer. 2) Confirm that bidders are eligible for the preferences claimed and if so, score bid evaluation points for preferencing. 3) Calculate total bid evaluation points. 4) Rank bid offers from the highest number of bid evaluation points to the lowest. 5) Recommend bidder with the highest number of bid evaluation points for the award of the contract, unless there are compelling and justifiable reasons not to do so.
Method 3: Financial offer and quality	1) Score quality, rejecting all bid offers that fail to score the minimum number of points for quality stated in the Bid data. 2) Score bid evaluation points for financial offer. 3) Calculate total bid evaluation points. 4) Rank bid offers from the highest number of bid evaluation points to the lowest. 5) Recommend bidder with the highest number of bid evaluation points for the award of the contract, unless there are compelling and justifiable reasons not to do so.
Method 4: Financial offer, quality and preferences	1) Score quality, rejecting all bid offers that fail to score the minimum number of points for quality stated in the Bid data. 2) Score bid evaluation points for financial offer. 3) Confirm that bidders are eligible for the preferences claimed, and if so, score bid evaluation points for Preferencing. 4) Calculate total bid evaluation points. 5) Rank bid offers from the highest number of bid evaluation points to the lowest. 6) Recommend bidder with the highest number of bid evaluation points for the award of the contract, unless there are compelling and justifiable reasons not to do so.

Score financial offers, preferences and quality, as relevant, to two decimal places.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

F.3.11.2 Scoring Financial Offers

Score the financial offers of remaining responsive bid offers using either formulas 1 or 2 below as stated in the Bid Data:

Formula	Basis for comparison	Option 1	Option 2
1	Highest price or discount	$(1 + \frac{(P - P_m)}{P_m})$	P/P_m
2	Lowest price or percentage commission/fee	$(1 - \frac{(P - P_m)}{P_m})$	P_m/P

where:

P_m = the comparative offer of the most favourable bid offer.

P = the comparative offer of bid offer under consideration.

F.3.11.3 Scoring quality (functionality)

Score quality in each of the categories stated in the Bid Data and calculate total score for quality.

F.3.12 Insurance provided by the employer

If requested by the proposed successful bidder, submit for the bidder's information the policies and / or certificates of insurance which the conditions of contract identified in the contract data, require the employer to provide.

F.3.13 Acceptance of bid offer

F.3.13.1 Accept bid offer only if the bidder satisfies the legal requirements stated in the Bid Data.

F.3.13.2 Notify the successful bidder of the employer's acceptance of his bid offer by completing and returning one copy of the form of offer and acceptance before the expiry of the validity period stated in the bid data, or agreed additional period. Providing the form of offer and acceptance does not contain any qualifying statements, it will constitute the formation of a contract between the employer and the successful bidder as described in the form of offer and acceptance.

F.3.14 Notice to unsuccessful bidders

After the successful bidder has acknowledged the employer's notice of acceptance, notify other bidders that their bid offers have not been accepted.

F.3.15. Prepare contract documents

If necessary, revise documents that shall form part of the contract and that were issued by the employer as part of the bid documents to take account of:

- Addenda issued during the bid period,
- Inclusion of some of the returnable documents,
- Other revisions agreed between the employer and the successful bidder, and
- The schedule of deviations attached to the form of offer and acceptance, if any.

F.3.16 Issue final contract

Prepare and issue the final draft of contract documents to the successful bidder for acceptance as soon as possible after the date of the employer's signing of the form of offer and acceptance (including the schedule of deviations, if any). Only those documents that the conditions of bid require the bidder to submit, after acceptance by the employer, shall be included.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

F.3.17 Complete adjudicator's contract

Unless alternative arrangements have been agreed or otherwise provided for in the contract, arrange for both parties to complete formalities for appointing the selected adjudicator at the same time as the main contract is signed.

F.3.18 Provide copies of the contracts

Provide to the successful bidder the number of copies stated in the Bid Data of the signed copy of the contract as soon as possible after completion and signing of the form of offer and acceptance.

ETENDER

--

Contractor

--

Witness 1

--

Witness 2

--

Employer

--

Witness 1

--

Witness 2

PART T2: RETURNABLE SCHEDULES

TABLE OF CONTENTS	Page	Colour
T2.1: LIST OF RETURNABLE DOCUMENTS.....	T.21	
T2.2: RETURNABLE SCHEDULES TO BE COMPLETED BY TENDERER	T.22	

TENDER

*Contractor**Witness 1**Witness 2**Employer**Witness 1**Witness 2*

The tenderer must complete the following returnable documents:

1 Returnable Schedules required only for tender evaluation purposes.

A	MBD 1 – BIDDING INFORMATION & TERMS OF BIDDING	
B	MDB 4 - DECLARATION OF INTEREST	
C	MDB 6.1 - PREFERENCE SCHEDULE AND VERIFICATION	
D	MBD 6.2 – LOCAL PRODUCTION & CONTENT	
E	MDB 8 - PAST SCM PRACTICES	
F	MDB 9 - CERTIFICATE OF INDEPENDENT BID	
G	AUTHORITY OF SIGNATORY	
H	BANKING DETAILS AND RATING	
I	MUNICIPAL UTILITY ACCOUNT	
J	SCHEDULE OF PROPOSED SUBCONTRACTORS	
K	RECORD OF ADDENDA	
L	SCHEDULE OF TENDERER'S EXPERIENCE	
M	KEY PERSONNEL	
N	SCHEDULE OF PLANT AND EQUIPMENT	
O	CENTRAL SUPPLIER DATABASE	
P	CONSTRUCTION INDUSTRY DISTRIBUTION BOARD	
Q	COMPLIANCE WITH OCCUPATIONAL HEALTH AND SAFETY ACT1993	
R	REGISTRATION AS ELECTRICAL CONTRACTOR	
S	SCHEDULE OF ESTIMATED MONTHLY EXPENDITURE	
T	SCHEDULE OF LABOUR	

NB: Mandatory documents will also be used for the evaluation

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

2. Other documents required only for bid evaluation purposes

	<u>Documents to attach</u>
	Board resolution on authority to sign
	Letter from the bank – details and Rating
	Municipal accounts
	Appointment and completion letters
	Key CVs and certified qualification
	Proof of plant and equipment
	CIDB registration
	COIDA letter
	CSD

3 The offer portion

Part C1 Agreements and Contract Data

Part C2 Pricing Data

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

T2.2 RETURNABLE SCHEDULES

FORM A: MBD 1

PART A INVITATION TO BID

YOU ARE HEREBY INVITED TO BID FOR REQUIREMENTS OF THE EPHRAIM MOGALE LOCAL MUNICIPALITY

BID NUMBER:	EPMLM/8/3/515	CLOSING DATE:	05 May 2025	CLOSING TIME:	12:00
-------------	---------------	---------------	-------------	---------------	-------

DESCRIPTION **APPOINTMENT OF A CONTRACTOR FOR CONSTRUCTION OF MATLEREKENG SPORTS FACILITY**

THE SUCCESSFUL BIDDER WILL BE REQUIRED TO FILL IN AND SIGN A WRITTEN CONTRACT FORM (MBD7).

BID RESPONSE DOCUMENTS MAY BE DEPOSITED IN
THE BID BOX SITUATED AT;

EPHRAIM MOGALE LOCAL MUNICIPALITY (BUDGET & TREASURY AND TECHNICAL BUILDING)

NO. 2 FICUS STREET

MARBLE HALL

0450

NOTE: THE BID BOX IS ONLY ACCESSIBLE MONDAY - FRIDAY DURING OFFICE HOURS (08:00 TO 16:30)

SUPPLIER INFORMATION

NAME OF BIDDER					
POSTAL ADDRESS					
STREET ADDRESS					
TELEPHONE NUMBER	CODE		NUMBER		
CELLPHONE NUMBER					
FACSIMILE NUMBER	CODE		NUMBER		
E-MAIL ADDRESS					
VAT REGISTRATION NUMBER					
TAX COMPLIANCE STATUS	TCS PIN:		OR	CSD No:	MAAA

ARE YOU THE ACCREDITED REPRESENTATIVE IN SOUTH AFRICA FOR THE GOODS /SERVICES /WORKS OFFERED?	☐ Yes ☐ No [IF YES ENCLOSE PROOF]	ARE YOU A FOREIGN BASED SUPPLIER FOR THE GOODS /SERVICES /WORKS OFFERED?	☐ Yes ☐ No [IF YES, ANSWER PART B:3]
TOTAL NUMBER OF ITEMS OFFERED		TOTAL BID PRICE	R
SIGNATURE OF BIDDER		DATE	
CAPACITY UNDER WHICH THIS BID IS SIGNED			

BIDDING PROCEDURE ENQUIRIES MAY BE DIRECTED TO:		TECHNICAL INFORMATION MAY BE DIRECTED TO:	
DEPARTMENT	SCM	CONTACT PERSON	Solomon Marima
CONTACT PERSON	JOSEPH MADISHA	TELEPHONE NUMBER	013 261 8471
TELEPHONE NUMBER	013 261 8450/ 8462	FACSIMILE NUMBER	013 261 4055
FACSIMILE NUMBER	013 261 4055	E-MAIL ADDRESS	smarima@emogalelm.gov.za
E-MAIL ADDRESS	ephmlmsupplychain@emogalelm.gov.za		

30

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

PART B

TERMS AND CONDITIONS FOR BIDDING

1. BID SUBMISSION:										
1.1. BIDS MUST BE DELIVERED BY THE STIPULATED TIME TO THE CORRECT ADDRESS. LATE BIDS WILL NOT BE ACCEPTED FOR CONSIDERATION. 1.2. ALL BIDS MUST BE SUBMITTED ON THE OFFICIAL FORMS PROVIDED–(NOT TO BE RE-TYPED) OR ONLINE 1.3. THIS BID IS SUBJECT TO THE PREFERENTIAL PROCUREMENT POLICY FRAMEWORK ACT AND THE PREFERENTIAL PROCUREMENT REGULATIONS, 2022, THE GENERAL CONDITIONS OF CONTRACT (GCC) AND, IF APPLICABLE, ANY OTHER SPECIAL CONDITIONS OF CONTRACT.										
2. TAX COMPLIANCE REQUIREMENTS										
2.1 BIDDERS MUST ENSURE COMPLIANCE WITH THEIR TAX OBLIGATIONS. 2.2 BIDDERS ARE REQUIRED TO SUBMIT THEIR UNIQUE PERSONAL IDENTIFICATION NUMBER (PIN) ISSUED BY SARS TO ENABLE THE ORGAN OF STATE TO VIEW THE TAXPAYER'S PROFILE AND TAX STATUS. 2.3 APPLICATION FOR THE TAX COMPLIANCE STATUS (TCS) CERTIFICATE OR PIN MAY ALSO BE MADE VIA E-FILING. IN ORDER TO USE THIS PROVISION, TAXPAYERS WILL NEED TO REGISTER WITH SARS AS E-FILERS THROUGH THE WEBSITE WWW.SARS.GOV.ZA. 2.4 FOREIGN SUPPLIERS MUST COMPLETE THE PRE-AWARD QUESTIONNAIRE IN PART B:3. 2.5 BIDDERS MAY ALSO SUBMIT A PRINTED TCS CERTIFICATE TOGETHER WITH THE BID. 2.6 IN BIDS WHERE CONSORTIA / JOINT VENTURES / SUB-CONTRACTORS ARE INVOLVED, EACH PARTY MUST SUBMIT A SEPARATE TCS CERTIFICATE / PIN / CSD NUMBER. 2.7 WHERE NO TCS IS AVAILABLE BUT THE BIDDER IS REGISTERED ON THE CENTRAL SUPPLIER DATABASE (CSD), A CSD NUMBER MUST BE PROVIDED.										
3. QUESTIONNAIRE TO BIDDING FOREIGN SUPPLIERS										
<table style="width: 100%; border: none;"> <tr> <td style="width: 75%;">3.1. IS THE ENTITY A RESIDENT OF THE REPUBLIC OF SOUTH AFRICA (RSA)?</td> <td style="width: 25%; text-align: right;"> ☐ YES ☐ NO </td> </tr> <tr> <td>3.2. DOES THE ENTITY HAVE A BRANCH IN THE RSA?</td> <td style="text-align: right;"> ☐ YES ☐ NO </td> </tr> <tr> <td>3.3. DOES THE ENTITY HAVE A PERMANENT ESTABLISHMENT IN THE RSA?</td> <td style="text-align: right;"> ☐ YES ☐ NO </td> </tr> <tr> <td>3.4. DOES THE ENTITY HAVE ANY SOURCE OF INCOME IN THE RSA?</td> <td style="text-align: right;"> ☐ YES ☐ NO </td> </tr> <tr> <td>3.5. IS THE ENTITY LIABLE IN THE RSA FOR ANY FORM OF TAXATION?</td> <td style="text-align: right;"> ☐ YES ☐ NO </td> </tr> </table> IF THE ANSWER IS "NO" TO ALL OF THE ABOVE, THEN IT IS NOT A REQUIREMENT TO REGISTER FOR A TAX COMPLIANCE STATUS SYSTEM PIN CODE FROM THE SOUTH AFRICAN REVENUE SERVICE (SARS) AND IF NOT REGISTER AS PER 2.3 ABOVE.	3.1. IS THE ENTITY A RESIDENT OF THE REPUBLIC OF SOUTH AFRICA (RSA)?	☐ YES ☐ NO	3.2. DOES THE ENTITY HAVE A BRANCH IN THE RSA?	☐ YES ☐ NO	3.3. DOES THE ENTITY HAVE A PERMANENT ESTABLISHMENT IN THE RSA?	☐ YES ☐ NO	3.4. DOES THE ENTITY HAVE ANY SOURCE OF INCOME IN THE RSA?	☐ YES ☐ NO	3.5. IS THE ENTITY LIABLE IN THE RSA FOR ANY FORM OF TAXATION?	☐ YES ☐ NO
3.1. IS THE ENTITY A RESIDENT OF THE REPUBLIC OF SOUTH AFRICA (RSA)?	☐ YES ☐ NO									
3.2. DOES THE ENTITY HAVE A BRANCH IN THE RSA?	☐ YES ☐ NO									
3.3. DOES THE ENTITY HAVE A PERMANENT ESTABLISHMENT IN THE RSA?	☐ YES ☐ NO									
3.4. DOES THE ENTITY HAVE ANY SOURCE OF INCOME IN THE RSA?	☐ YES ☐ NO									
3.5. IS THE ENTITY LIABLE IN THE RSA FOR ANY FORM OF TAXATION?	☐ YES ☐ NO									
3.6.										

NB: FAILURE TO PROVIDE ANY OF THE ABOVE PARTICULARS MAY RENDER THE BID INVALID.

NO BIDS WILL BE CONSIDERED FROM PERSONS IN THE SERVICE OF THE STATE.

SIGNATURE OF BIDDER:

CAPACITY UNDER WHICH THIS BID IS SIGNED:

DATE:

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

FORM B: MBD4**MBD4****DECLARATION OF INTEREST**

1. No bid will be accepted from persons in the service of the state¹.
2. Any person, having a kinship with persons in the service of the state, including a blood relationship, may make an offer or offers in terms of this invitation to bid. In view of possible allegations of favouritism, should the resulting bid, or part thereof, be awarded to persons connected with or related to persons in service of the state, it is required that the bidder or their authorised representative declare their position in relation to the evaluating/adjudicating authority and/or take an oath declaring his/her interest.
3. **In order to give effect to the above, the following questionnaire must be completed and submitted with the bid. Also select the applicable answers ☒**
 - 3.1 Full Name of bidder or his or her representative:
 - 3.2 Identity Number:
 - 3.3 Position occupied in the Company (director, trustee, shareholder²)
 - 3.4 Company Registration Number:
 - 3.5 Tax Reference Number:
 - 3.6 VAT Registration Number:
 - 3.7 The names of all directors / trustees / shareholders members, their individual identity numbers and state employee numbers must be indicated in paragraph 4 below.
 - 3.8 Are you presently in the service of the state* YES ☐ / NO ☐

3.8.1 If yes, furnish particulars.

.....

.....

¹MSCM Regulations: "in the service of the state" means to be –

- (a) a member of –
 - (i) any municipal council;
 - (ii) any provincial legislature; or
 - (iii) the national Assembly or the national Council of provinces;
- (b) a member of the board of directors of any municipal entity;
- (c) an official of any municipality or municipal entity;
- (d) an employee of any national or provincial department, national or provincial public entity or constitutional institution within the meaning of the Public Finance Management Act, 1999 (Act No.1 of 1999);
- (e) a member of the accounting authority of any national or provincial public entity; or
- (f) an employee of Parliament or a provincial legislature.

² Shareholder" means a person who owns shares in the company and is actively involved in the management of the company or business and exercises control over the company

--

Contractor

--

Witness 1

--

Witness 2

--

Employer

--

Witness 1

--

Witness 2

3.9 Have you been in the service of the state for the past twelve months? YES ☐ / NO ☐

3.9.1 If yes, furnish particulars

.....

.....

3.10 Do you, have any relationship (family, friend, other) with person in the service of the state and who may be involved with the evaluation and or adjudication of this bid? YES ☐ / NO ☐

3.10.1 If yes, furnish particulars

.....

.....

3.11 Are you, aware of any relationship (family, friend, other) between bidder and any persons in the service of the state who may be involved with the evaluation and adjudication of this bid? YES ☐ / NO ☐

3.11.1 If yes, furnish particulars

.....

.....

3.12 Are any of the company's directors, managers, principle shareholders or stakeholders in service of the state? YES ☐ / NO ☐

3.12.1 If yes, furnish particulars

.....

.....

3.13 Are any spouse, child or parent of the company's directors, trustees, managers, principle shareholders or stakeholders in service of the state? YES ☐ / NO ☐

3.13.1 If yes, furnish particulars

.....

.....

3.14 Do you or any of the directors, trustees, managers, principle shareholders, or stakeholders of this company have any interest in any other companies or business whether or not they are bidding for this contract? YES ☐ / NO ☐

3.14.1 If yes furnish particulars:

.....

.....

4. Full details of directors / trustees / members / shareholders.

Full Name	Identity Number	Employee Number

CERTIFICATION**I, THE UNDERSIGNED****(NAME)****CERTIFY THAT THE INFORMATION FURNISHED ON THIS DECLARATION FORM IS CORRECT.****I ACCEPT THAT THE STATE MAY ACT AGAINST ME SHOULD THIS DECLARATION PROVE TO BE FALSE.**.....
Signature.....
Date.....
Capacity.....
Name of Bidder

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

A. DECLARATION FOR PROCUREMENT ABOVE R10 MILLION (ALL APPLICABLE TAXES INCLUDED)

For all procurement expected to exceed R10 million (all applicable taxes included), bidders must complete the following questionnaire:

1 Are you by law required to prepare annual financial statements for auditing?

1.1 If yes, submit audited annual financial statements for the past three years or since the date of establishment if established during the past three years.

*YES ☐ / NO ☐

2 Do you have any outstanding undisputed commitments for municipal services towards any municipality for more than three months or any other service provider in respect of which payment is overdue for more than 30 days?

2.1 If no, this serves to certify that the bidder has no undisputed commitments for municipal services towards any municipality for more than three months or other service provider in respect of which payment is overdue for more than 30 days.

2.2 If yes, provide particulars.

3 Has any contract been awarded to you by an organ of state during the past five years, including particulars of any material non-compliance or dispute concerning the execution of such contract?

*YES ☐ / NO ☐

3.1 If yes, provide particulars.

4. Will any portion of goods or services be sourced from outside the Republic, and, if so, what portion and whether any portion of payment from the municipality / municipal entity is expected to be transferred out of the Republic?

YES ☐ / NO ☐

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

4.1 If yes, furnish particulars

.....

* Delete if not applicable

CERTIFICATION

I, THE UNDERSIGNED (NAME)
CERTIFY THAT THE INFORMATION FURNISHED ON THIS DECLARATION FORM IS CORRECT. I
ACCEPT THAT THE STATE MAY ACT AGAINST ME SHOULD THIS DECLARATION PROVE TO BE
FALSE.

.....
 Signature

.....
 Date

.....
 Name of Bidder

.....
 Capacity

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

FORM C : MBD 6.1**MBD 6.1****PREFERENCE POINTS CLAIM FORM IN TERMS OF THE PREFERENTIAL
PROCUREMENT REGULATIONS 2022**

This preference form must form part of all tenders invited. It contains general information and serves as a claim form for preference points for specific goals.

NB: BEFORE COMPLETING THIS FORM, TENDERERS MUST STUDY THE GENERAL CONDITIONS, DEFINITIONS AND DIRECTIVES APPLICABLE IN RESPECT OF THE TENDER AND PREFERENTIAL PROCUREMENT REGULATIONS, 2022

1. GENERAL CONDITIONS

1.1 The following preference point systems are applicable to invitations to tender:

- the 80/20 system for requirements with a Rand value of up to R50 000 000 (all applicable taxes included); and
- the 90/10 system for requirements with a Rand value above R50 000 000 (all applicable taxes included).

1.2 To be completed by the organ of state

a) The applicable preference point system for this tender is the **80/20** preference point system.

1.3 Points for this tender (even in the case of a tender for income-generating contracts) shall be awarded for:

- (a) Price; and
(b) Specific Goals.

1.4 To be completed by the organ of state:

The maximum points for this tender are allocated as follows:

	POINTS
PRICE	80
SPECIFIC GOALS	20
Total points for Price and SPECIFIC GOALS	100

1.5 Failure on the part of a tenderer to submit proof or documentation required in terms of this tender to claim points for specific goals with the tender, will be interpreted to mean that preference points for specific goals are not claimed.

1.6 The organ of state reserves the right to require of a tenderer, either before a tender is adjudicated or at any time subsequently, to substantiate any claim in regard to preferences, in any manner required by the organ of state.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

2. DEFINITIONS

- (a) **“tender”** means a written offer in the form determined by an organ of state in response to an invitation to provide goods or services through price quotations, competitive tendering process or any other method envisaged in legislation;
- (b) **“price”** means an amount of money tendered for goods or services, and includes all applicable taxes less all unconditional discounts;
- (c) **“rand value”** means the total estimated value of a contract in Rand, calculated at the time of bid invitation, and includes all applicable taxes;
- (d) **“tender for income-generating contracts”** means a written offer in the form determined by an organ of state in response to an invitation for the origination of income-generating contracts through any method envisaged in legislation that will result in a legal agreement between the organ of state and a third party that produces revenue for the organ of state, and includes, but is not limited to, leasing and disposal of assets and concession contracts, excluding direct sales and disposal of assets through public auctions; and
- (e) **“the Act”** means the Preferential Procurement Policy Framework Act, 2000 (Act No. 5 of 2000).

3. FORMULAE FOR PROCUREMENT OF GOODS AND SERVICES

3.1. POINTS AWARDED FOR PRICE

3.1.1 THE 80/20 PREFERENCE POINT SYSTEMS

A maximum of 80 points is allocated for price on the following basis:

80/20

$$Ps = 80 \left(1 - \frac{Pt - P_{min}}{P_{min}} \right)$$

Where

Ps = Points scored for price of tender under consideration

Pt = Price of tender under consideration

Pmin = Price of lowest acceptable tender

3.2. FORMULAE FOR DISPOSAL OR LEASING OF STATE ASSETS AND INCOME GENERATING PROCUREMENT

3.2.1. POINTS AWARDED FOR PRICE

A maximum of 80 points is allocated for price on the following basis:

80/20

$$Ps = 80 \left(1 + \frac{Pt - P_{max}}{P_{max}} \right)$$

Where

Ps = Points scored for price of tender under consideration

Pt = Price of tender under consideration

Pmax = Price of highest acceptable tender

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

4. POINTS AWARDED FOR SPECIFIC GOALS

- 4.1. In terms of Regulation 4(2); 5(2); 6(2) and 7(2) of the Preferential Procurement Regulations, preference points must be awarded for specific goals stated in the tender. For the purposes of this tender the tenderer will be allocated points based on the goals stated in table 1 below as may be supported by proof/ documentation stated in the conditions of this tender:
- 4.2. In cases where organs of state intend to use Regulation 3(2) of the Regulations, which states that, if it is unclear whether the 80/20 or 90/10 preference point system applies, an organ of state must, in the tender documents, stipulate in the case of—
- (a) an invitation for tender for income-generating contracts, that either the 80/20 or 90/10 preference point system will apply and that the highest acceptable tender will be used to determine the applicable preference point system; or
 - (b) any other invitation for tender, that either the 80/20 or 90/10 preference point system will apply and that the lowest acceptable tender will be used to determine the applicable preference point system,
- then the organ of state must indicate the points allocated for specific goals for both the 90/10 and 80/20 preference point system.

Table 1: Specific goals for the tender and points claimed are indicated per the table below.

(Note to organs of state: Where either the 90/10 or 80/20 preference point system is applicable, corresponding points must also be indicated as such.)

(Note to tenderers: The tenderer must indicate how they claim points for each preference point system.)

The specific goals allocated points in terms of this tender	Means of Verification	Number of points allocated (80/20 system) (To be completed by the organ of state)	Number of points claimed (80/20 system) (To be completed by the tenderer)
At least 51% Black ownership	Identification documents / CSD Report / CIPC Certificate	10	
At least 51% Women Ownership	Identification document / CSD Report / CIPC Certificate	5	
At least 51% People with Disability	Medical Report indicating disability	3	
At least 51% Youth ownership (18 to 35 Years of age)	Identification document / CSD Report / CIPC Certificate	2	

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

DECLARATION WITH REGARD TO COMPANY/FIRM

4.3. Name of company/firm.....

4.4. Company registration number:

4.5. TYPE OF COMPANY/ FIRM

- ☐ Partnership/Joint Venture / Consortium
- ☐ One-person business/sole propriety
- ☐ Close corporation
- ☐ Public Company
- ☐ Personal Liability Company
- ☐ (Pty) Limited
- ☐ Non-Profit Company
- ☐ State Owned Company

[TICK APPLICABLE BOX]

4.6. I, the undersigned, who is duly authorised to do so on behalf of the company/firm, certify that the points claimed, based on the specific goals as advised in the tender, qualifies the company/ firm for the preference(s) shown and I acknowledge that:

- i) The information furnished is true and correct;
- ii) The preference points claimed are in accordance with the General Conditions as indicated in paragraph 1 of this form;
- iii) In the event of a contract being awarded as a result of points claimed as shown in paragraphs 1.4 and 4.2, the contractor may be required to furnish documentary proof to the satisfaction of the organ of state that the claims are correct;
- iv) If the specific goals have been claimed or obtained on a fraudulent basis or any of the conditions of contract have not been fulfilled, the organ of state may, in addition to any other remedy it may have –
 - (a) disqualify the person from the tendering process;
 - (b) recover costs, losses or damages it has incurred or suffered as a result of that person's conduct;
 - (c) cancel the contract and claim any damages which it has suffered as a result of having to make less favourable arrangements due to such cancellation;
 - (d) recommend that the tenderer or contractor, its shareholders and directors, or only the shareholders and directors who acted on a fraudulent basis, be restricted from obtaining business from any organ of state for a period not exceeding 10 years, after the *audi alteram partem* (hear the other side) rule has been applied; and
 - (e) forward the matter for criminal prosecution, if deemed necessary.

.....
SIGNATURE(S) OF TENDERER(S)

SURNAME AND NAME:

DATE:

ADDRESS:

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

DECLARATION CERTIFICATE FOR LOCAL PRODUCTION AND CONTENT FOR DESIGNATED SECTORS

This Municipal Bidding Document (MBD) must form part of all bids invited. It contains general information and serves as a declaration form for local content (local production and local content are used interchangeably).

Before completing this declaration, bidders must study the General Conditions, Definitions, Directives applicable in respect of Local Content as prescribed in the Preferential Procurement Regulations, 2017, the South African Bureau of Standards (SABS) approved technical specification number SATS 1286:2011 (Edition 1) and the Guidance on the Calculation of Local Content together with the Local Content Declaration Templates [Annex C (Local Content Declaration: Summary Schedule), D (Imported Content Declaration: Supporting Schedule to Annex C) and E (Local Content Declaration: Supporting Schedule to Annex C)].

1. General Conditions

- 1.1. Preferential Procurement Regulations, 2017 (Regulation 8) make provision for the promotion of local production and content.
- 1.2. Regulation 8.(2) prescribes that in the case of designated sectors, organs of state must advertise such tenders with the specific bidding condition that only locally produced or manufactured goods, with a stipulated minimum threshold for local production and content will be considered.
- 1.3. Where necessary, for tenders referred to in paragraph 1.2 above, a two stage bidding process may be followed, where the first stage involves a minimum threshold for local production and content and the second stage price and Specific goals.
- 1.4. A person awarded a contract in relation to a designated sector, may not sub-contract in such a manner that the local production and content of the overall value of the contract is reduced to below the stipulated minimum threshold.
- 1.5. The local content (LC) expressed as a percentage of the bid price must be calculated in accordance with the SABS approved technical specification number SATS 1286: 2011 as follows:

$$LC = [1 - x / y] * 100$$

Where

x is the imported content in Rand

y is the bid price in Rand excluding value added tax (VAT)

Prices referred to in the determination of x must be converted to Rand (ZAR) by using the exchange rate published by South African Reserve Bank (SARB) at 12:00 on the date of advertisement of the bid as indicated in paragraph 4.1 below.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

The SABS approved technical specification number SATS 1286:2011 is accessible on <http://www.thedti.gov.za/industrial development/ip.jsp> at no cost.

1.6. A bid may be disqualified if this Declaration Certificate and the Annex C (Local Content Declaration: Summary Schedule) are not submitted as part of the bid documentation.

2. The stipulated minimum threshold(s) for local production and content (refer to Annex A of SATS 1286:2011) for this bid is/are as follows:

<u>Description of services, works or goods</u>	<u>Stipulated minimum threshold</u>
Steel reinforcement	100%
Cement	100%

3. Does any portion of the goods or services offer have any imported content?
(Tick applicable box)

YES		NO	
-----	--	----	--

3.1 If yes, the rate(s) of exchange to be used in this bid to calculate the local content as prescribed in paragraph 1.5 of the general conditions must be the rate(s) published by SARB for the specific currency at 12:00 on the date of advertisement of the bid.

The relevant rates of exchange information is accessible on www.reservebank.co.za

Indicate the rate(s) of exchange against the appropriate currency in the table below (refer to Annex A of SATS 1286:2011):

Currency	Rates of exchange
US Dollar	
Pound Sterling	
Euro	
Yen	
Other	

NB: Bidders must submit proof of the SARB rate (s) of exchange used.

4. Where, after the award of a bid, challenges are experienced in meeting the stipulated minimum threshold for local content the DTI must be informed accordingly in order for the dti to verify and in consultation with the AO/AA provide directives in this regard.

--

Contractor

--

Witness 1

--

Witness 2

--

Employer

--

Witness 1

--

Witness 2

LOCAL CONTENT DECLARATION
(REFER TO ANNEX B OF SATS 1286:2011)

LOCAL CONTENT DECLARATION BY CHIEF FINANCIAL OFFICER OR OTHER LEGALLY RESPONSIBLE PERSON NOMINATED IN WRITING BY THE CHIEF EXECUTIVE OR SENIOR MEMBER/PERSON WITH MANAGEMENT RESPONSIBILITY (CLOSE CORPORATION, PARTNERSHIP, OR INDIVIDUAL)

IN RESPECT OF BID NO.

ISSUED BY: (Procurement Authority / Name of Institution):

.....
 NB

- 1 The obligation to complete, duly sign and submit this declaration cannot be transferred to an external authorized representative, auditor or any other third party acting on behalf of the bidder.
- 2 Guidance on the Calculation of Local Content together with Local Content Declaration Templates (Annex C, D and E) is accessible on http://www.thdti.gov.za/industrial_development/ip.jsp. Bidders should first complete Declaration D. After completing Declaration D, bidders should complete Declaration E and then consolidate the information on Declaration C. **Declaration C should be submitted with the bid documentation at the closing date and time of the bid in order to substantiate the declaration made in paragraph (c) below.** Declarations D and E should be kept by the bidders for verification purposes for a period of at least 5 years. The successful bidder is required to continuously update Declarations C, D and E with the actual values for the duration of the contract.

I, the undersigned, (full names),

do hereby declare, in my capacity as

of(name of bidder entity), the following:

- (a) The facts contained herein are within my own personal knowledge.
- (b) I have satisfied myself that:
 - (i) the goods/services/works to be delivered in terms of the above-specified bid comply with the minimum local content requirements as specified in the bid, and as measured in terms of SATS 1286:2011; and
- (c) The local content percentage (%) indicated below has been calculated using the formula given in clause 3 of SATS 1286:2011, the rates of exchange indicated in paragraph 4.1 above and the information contained in Declaration D and E which has been consolidated in Declaration C:

Bid price, excluding VAT (y)	R
Imported content (x), as calculated in terms of SATS 1286:2011	R
Stipulated minimum threshold for local content (paragraph 3 above)	
Local content %, as calculated in terms of SATS 1286:2011	

If the bid is for more than one product, the local content percentages for each product contained in Declaration C shall be used instead of the table above.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

The local content percentages for each product has been calculated using the formula given in clause 3 of SATS 1286:2011, the rates of exchange indicated in paragraph 4.1 above and the information contained in Declaration D and E.

- (d) I accept that the Procurement Authority / Institution has the right to request that the local content be verified in terms of the requirements of SATS 1286:2011.
- (e) I understand that the awarding of the bid is dependent on the accuracy of the information furnished in this application. I also understand that the submission of incorrect data, or data that are not verifiable as described in SATS 1286:2011, may result in the Procurement Authority / Institution imposing any or all of the remedies as provided for in Regulation 14 of the Preferential Procurement Regulations, 2017 promulgated under the Preferential Policy Framework Act (PPPFA), 2000 (Act No. 5 of 2000).

SIGNATURE: _____

DATE: _____

WITNESS No. 1 _____

DATE: _____

WITNESS No. 2 _____

DATE: _____

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

SATS 1286.2011

Annex C

Local Content Declaration - Summary Schedule

(C1) Tender No.

(C2) Tender description:

(C3) Designated product(s)

(C4) Tender Authority:

(C5) Tendering Entity name:

(C6) Tender Exchange Rate:

Pula

EU

GBP

(C7) Specified local content %

Note: VAT to be excluded from all calculations

Calculation of local content

Tender summary

Tender item no's	List of items	Tender price - each (excl VAT)	Exempted imported value	Tender value net of exempted imported content	Imported value	Local value	Local content % (per item)	Tender Qty	Total tender value	Total exempted imported content	Total Imported content
(C8)	(C9)	(C10)	(C11)	(C12)	(C13)	(C14)	(C15)	(C16)	(C17)	(C18)	(C19)

(C20) Total tender value R 0

(C21) Total Exempt imported content R 0

(C22) Total Tender value net of exempt imported content R 0

(C23) Total Imported content R 0

(C24) Total local content R 0

(C25) Average local content % of tender

Signature of tenderer from Annex B

Date:

45

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

FORM E: MBD 8**MBD 8****DECLARATION OF BIDDER'S PAST SUPPLY CHAIN MANAGEMENT PRACTICES**

- 1 This Municipal Bidding Document must form part of all bids invited.
- 2 It serves as a declaration to be used by municipalities and municipal entities in ensuring that when goods and services are being procured, all reasonable steps are taken to combat the abuse of the supply chain management system.
- 3 The bid of any bidder may be rejected if that bidder, or any of its directors have:
 - a. abused the municipality's / municipal entity's supply chain management system or committed any improper conduct in relation to such system;
 - b. been convicted for fraud or corruption during the past five years;
 - c. willfully neglected, reneged on or failed to comply with any government, municipal or other public sector contract during the past five years; or
 - d. been listed in the Register for Tender Defaulters in terms of section 29 of the Prevention and Combating of Corrupt Activities Act (No 12 of 2004).
- 4 In order to give effect to the above, the following questionnaire must be completed and submitted with the bid.

Item	Question	Yes	No
4.1	Is the bidder or any of its directors listed on the National Treasury's Database of Restricted Suppliers as companies or persons prohibited from doing business with the public sector? (Companies or persons who are listed on this Database were informed in writing of this restriction by the Accounting Officer/Authority of the institution that imposed the restriction after the <i>audi alteram partem</i> rule was applied). The Database of Restricted Suppliers now resides on the National Treasury's website(www.treasury.gov.za) and can be accessed by clicking on its link at the bottom of the home page.	Yes ☐	No ☐
4.1.1	If so, furnish particulars:		
4.2	Is the bidder or any of its directors listed on the Register for Tender Defaulters in terms of section 29 of the Prevention and Combating of Corrupt Activities Act (No 12 of 2004)? The Register for Tender Defaulters can be accessed on the National Treasury's website (www.treasury.gov.za) by clicking on its link at the bottom of the home page.	Yes ☐	No ☐

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

4.2.1	If so, furnish particulars:		
4.3	Was the bidder or any of its directors convicted by a court of law (including a court of law outside the Republic of South Africa) for fraud or corruption during the past five years?	Yes ☐	No ☐
4.3.1	If so, furnish particulars:		
4.4	Does the bidder or any of its directors owe any municipal rates and taxes or municipal charges to the municipality / municipal entity, or to any other municipality / municipal entity, that is in arrears for more than three months?	Yes ☐	No ☐
4.4.1	If so, furnish particulars:		
4.5	Was any contract between the bidder and the municipality / municipal entity or any other organ of state terminated during the past five years on account of failure to perform on or comply with the contract?	Yes ☐	No ☐
4.7.1	If so, furnish particulars:		

CERTIFICATION

I, THE UNDERSIGNED (FULL NAME)
CERTIFY THAT THE INFORMATION FURNISHED ON THIS
DECLARATION FORM TRUE AND CORRECT.

I ACCEPT THAT, IN ADDITION TO CANCELLATION OF A CONTRACT, ACTION
MAY BE TAKEN AGAINST ME SHOULD THIS DECLARATION PROVE TO BE
FALSE.

.....
 Signature

.....
 Date

.....
 Position

.....
 Name of Bidder

Js367bW

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

FORM F: MBD 9**MBD 9****CERTIFICATE OF INDEPENDENT BID DETERMINATION**

- 1 This Municipal Bidding Document (MBD) must form part of all bids¹ invited.
- 2 Section 4 (1) (b) (iii) of the Competition Act No. 89 of 1998, as amended, prohibits an agreement between, or concerted practice by, firms, or a decision by an association of firms, if it is between parties in a horizontal relationship and if it involves collusive bidding (or bid rigging).² Collusive bidding is a *pe se* prohibition meaning that it cannot be justified under any grounds.
- 3 Municipal Supply Regulation 38 (1) prescribes that a supply chain management policy must provide measures for the combating of abuse of the supply chain management system, and must enable the accounting officer, among others, to:
 - a. take all reasonable steps to prevent such abuse;
 - b. reject the bid of any bidder if that bidder or any of its directors has abused the supply chain management system of the municipality or municipal entity or has committed any improper conduct in relation to such system; and
 - c. cancel a contract awarded to a person if the person committed any corrupt or fraudulent act during the bidding process or the execution of the contract.
- 4 This MBD serves as a certificate of declaration that would be used by institutions to ensure that, when bids are considered, reasonable steps are taken to prevent any form of bid-rigging.
- 5 In order to give effect to the above, the attached Certificate of Bid Determination (MBD 9) must be completed and submitted with the bid:

¹ Includes price quotations, advertised competitive bids, limited bids and proposals.

² Bid rigging (or collusive bidding) occurs when businesses, that would otherwise be expected to compete, secretly conspire to raise prices or lower the quality of goods and / or services for purchasers who wish to acquire goods and / or services through a bidding process. Bid rigging is, therefore, an agreement between competitors not to compete.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

MBD 9

CERTIFICATE OF INDEPENDENT BID DETERMINATION

I, the undersigned, in submitting the accompanying bid:

(Bid Number and Description)

in response to the invitation for the bid made by:

(Name of Municipality / Municipal Entity)

do hereby make the following statements that I certify to be true and complete in every respect:

I certify, on behalf of:

_____ that:
(Name of Bidder)

1. I have read and I understand the contents of this Certificate;
2. I understand that the accompanying bid will be disqualified if this Certificate is found not to be true and complete in every respect;
3. I am authorized by the bidder to sign this Certificate, and to submit the accompanying bid, on behalf of the bidder;
4. Each person whose signature appears on the accompanying bid has been authorized by the bidder to determine the terms of, and to sign, the bid, on behalf of the bidder;
5. For the purposes of this Certificate and the accompanying bid, I understand that the word "competitor" shall include any individual or organization, other than the bidder, whether or not affiliated with the bidder, who:
 - (a) has been requested to submit a bid in response to this bid invitation;
 - (b) could potentially submit a bid in response to this bid invitation, based on their qualifications, abilities or experience; and
 - (c) provides the same goods and services as the bidder and/or is in the same line of business as the bidder

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

6. The bidder has arrived at the accompanying bid independently from, and without consultation, communication, agreement or arrangement with any competitor. However communication between partners in a joint venture or consortium³ will not be construed as collusive bidding.
7. In particular, without limiting the generality of paragraphs 6 above, there has been no consultation, communication, agreement or arrangement with any competitor regarding:
 - (a) prices;
 - (b) geographical area where product or service will be rendered (market allocation)
 - (c) methods, factors or formulas used to calculate prices;
 - (d) the intention or decision to submit or not to submit, a bid;
 - (e) the submission of a bid which does not meet the specifications and conditions of the bid; or
 - (f) bidding with the intention not to win the bid.
8. In addition, there have been no consultations, communications, agreements or arrangements with any competitor regarding the quality, quantity, specifications and conditions or delivery particulars of the products or services to which this bid invitation relates.
9. The terms of the accompanying bid have not been, and will not be, disclosed by the bidder, directly or indirectly, to any competitor, prior to the date and time of the official bid opening or of the awarding of the contract.

³ Joint venture or Consortium means an association of persons for the purpose of combining their expertise, property, capital, efforts, skill and knowledge in an activity for the execution of a contract.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

10. I am aware that, in addition and without prejudice to any other remedy provided to combat any restrictive practices related to bids and contracts, bids that are suspicious will be reported to the Competition Commission for investigation and possible imposition of administrative penalties in terms of section 59 of the Competition Act No 89 of 1998 and or may be reported to the National Prosecuting Authority (NPA) for criminal investigation and or may be restricted from conducting business with the public sector for a period not exceeding ten (10) years in terms of the Prevention and Combating of Corrupt Activities Act No 12 of 2004 or any other applicable legislation.

.....
Signature

.....
Date

.....
Position

.....
Name of Bidder

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

FORM G: CERTIFICATE OF AUTHORITY

Indicate the status of the tenderer by ticking the appropriate box hereunder. **THE TENDERER MUST COMPLETE THE CERTIFICATE SET OUT BELOW FOR THE RELEVANT CATEGORY AND ATTACH A LETTER ON THE COMPANY LETTERHEAD.**

Please tick appropriate box:

A Company	B Partnership	C Joint Venture	D Close Corporation	E Sole Proprietor

A. CERTIFICATE FOR COMPANY

I,....., chairperson of the board of directors of hereby confirm that by resolution of the board (copy attached) taken on20...., Mr/Mrs.....acting in the capacity of.....,was authorised to sign all documents in connection with this tender and any contract resulting from it on behalf of the company.

As witness

1.....

Chairman

2.....

Date

B. CERTIFICATE OF PARTNERSHIP

We, the undersigned, being the key partners in the business trading as

hereby authorise Mr/Mrs....., acting in the capacity of.....to sign all documents in connection with the tender for Contract.....and any contract resulting from it on our behalf.

NAME	ADDRESS	SIGNATURE	DATE

NOTE: This certificate is to be completed and signed by all of the key partners upon whom rests the direction of the affairs of the Partnership as a whole.

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

C. CERTIFICATE FOR JOINT VENTURE

We, the undersigned, are submitting this tender offer in Joint Venture and hereby authorise Mr/Mrs....., authorised signatory of the company, acting in the capacity of lead partner, to sign all documents in connection with the tender offer for Contract.....and any other contract resulting from it on our behalf.

This authorisation is evidenced by the attached power of attorney signed by legally authorised signatories of all the partners to the Joint Venture.

NAME OF FIRM	ADDRESS	AUTHORISING SIGNATURE, NAME & CAPACITY
Lead partner		

D. CERTIFICATE FOR CLOSE CORPORATION

We, the undersigned, being the key members in the business trading as.....hereby authorise Mr/Mrs..... Acting in the capacity of....., to sign all documents in connection with the tender for Contract.....and any contract resulting from it on our behalf.

NAME	ADDRESS	SIGNATURE	DATE

NOTE: This certificate is to be complete and signed by all the key members upon whom rests the direction of the affairs of the Close Corporation as a whole.

E. SOLE PROPRIETOR

I,....., chairperson and sole owner of hereby confirm that by resolution of the board (copy attached) taken on20...., Mr/Mrs.....acting in the capacity of.....,was authorised to sign all documents in connection with this tender and any contract resulting from it on behalf of the company.

As witness

1.....

Chairman

2.....

Date

BIDDERS SHOULD ATTACH A DULY SIGNED AND DATED ORIGINAL OR CERTIFIED COPY OF THE LETTER OF AUTHORITY ON THE COMPANY'S LETTERHEAD, FAILURE TO DO SO WILL LEAD TO THE DISQUALIFICATION OF THE BID AS NON-RESPONSIVE

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

FORM H: BIDDER'S BANKING INFORMATION

DETAILS OF BIDDERS'S BANK ACCOUNT

I/We furnish the following information:

- a) Name of Bank:
- b) Branch of Bank
- c) Town/city/suburb where bank is situated.....
- d) Contact Person at the Bank:
- e) Telephone number of Bank: Code: Number:
- f) Account Number:
- g) Bank rating: (Attach letter from the bank)

I/We hereby authorise the Employer to approach the above Bank for a reference.

NOTE:

BIDDERS SHOULD ENSURE THAT THEIR BANK ACCOUNT DETAILS HAVE BEEN VERIFIED ON THE CSD REPORT. IF SUCH IS NOT VERIFIED, BIDDERS SHOULD ATTACH A COPY OF THEIR BANK CONFIRMATION LETTER

BIDDERS SHOULD ATTACH A LETTER FROM THE BANK TO SUPPORT THE BANK RATING CLAIMED.

Signature..... Date.....

Name..... Position.....

Tenderer.....



Contractor




Witness 1




Witness 2



Employer



Witness 1



Witness 2

FORM I: DECLARATION WITH REGARDS TO MUNICIPAL SERVICES, RATES AND TAXES

I _____ the undersigned, declare on

behalf of (Name of Bidder) _____
that;the bidder and any of its director(s) does not owe any municipal services, rates and taxes to the municipality or any other municipality or municipal entity any amount which could be in arrears for an period for a period more than three months.

In the event that this declaration is found to be false, the bid will be rejected and found to be nonresponsive.

1. COMPANY ACCOUNT		
NAME OF MUNICIPALITY	ACCOUNT NUMBER	ACCOUNT / PROPERTY OWNER
2. ACCOUNTS OF COMPANY DIRECTOR(S)		
NAME OF MUNICIPALITY	ACCOUNT NUMBER	ACCOUNT / PROPERTY OWNER

NOTE:

TENDERER TO SUBMIT A COPY OF A MUNICIPAL ACCOUNT OF THE COMPANY AND THAT OF ITS DIRECTOR NOT IN ARREARS AND NOT OLDER THAN THREE (03) MONTHS; OR

IN THE EVENT THAT THE BIDDER IS LEASING, A LEASE AGREEMENT ALONG WITH THE ACCOUNT OF THE LEASED PROPERTY SHOULD BE ATTACHED; OR

A CONFRIMATION LETTER FROM THE LOCAL MUNICIPALITY NOT OLDER THAN THREE MONTHS CONFIRMING THAT SERVICES ARE NOT CHARGED/LEVIED AND BIDDER DOES NOT OWE

(FAILURE TO DO SO WILL LEAD TO THE DISQUALIFICATION OF THE BID AS NON-RESPONSIVE)

Signature.....

Date.....

Name.....

Position.....

Tenderer.....

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

FORM J: SCHEDULE OF PROPOSED SUBCONTRACTORS

Will you be subcontracting on this project?

(Tick the appropriate box)

Yes ☐ / No ☐

We notify you that it is our intention to employ the following subcontractors for work in this contract.

If we are awarded a contract we agree that this notification does not change the requirement for us to submit the name of proposed subcontractors in accordance with requirements in the contract for such appointments. If there are no such requirements in the contract, then your written acceptance of this list shall be binding between us.

	Name of Subcontractor	Contact Details	Description of Work to be executed by Subcontractor
1.			
2.			
3.			
4.			
5.			

Signature.....

Date.....

Name.....

Position.....

Tenderer.....

56

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

FORM K: RECORD OF ADDENDA TO TENDER DOCUMENTS

Was there an addendum issued for this project?

(Tick appropriate box and complete table accordingly)

Yes ☐ / No ☐

We confirm that the following communications received from the employer before the submission of this tender offer, amending the tender documents, have been taken into account in this tender offer:

	Date	Title of Details
1.		
2.		
3.		
4.		
5.		
6.		
7.		
8.		
9.		
10.		

Attach additional pages if more space is required.

Signature..... Date

Name..... Position.....

Tenderer.....

57

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

FORM L: SCHEDULE OF TENDERER'S EXPERIENCE

The following is a statement of similar work successfully executed by myself/ourselves in the last three years:

INSTITUTION NAME	RELEVANT PROJECT NAME	CONTACT PERSON	LAND LINE CONTACT NO.	CELL CONTACT NO.	PROJECT START & END DATE

NB: COMPLETE THE TABLE ABOVE ON COMPANY EXPERIENCE (COMPULSORY TABLE) AND ALSO ATTACH PROOF OF PROJECTS LISTED ON THE ABOVE TABLE (FAILURE TO DO SO WILL LEAD TO THE DISQUALIFICATION OF THE BID AS NON-RESPONSIVE) Focus on projects that will qualify for the functionality criteria first

Signature..... Date

Name..... Position.....

58



Contractor




Witness 1




Witness 2



Employer



Witness 1



Witness 2

FORM M: PROPOSED KEY PERSONNEL

The Bidder shall list below the key personnel (including first nominee and the second-choice alternate), whom he proposes to employ on the project should his Bid be accepted, both at his headquarters and on the Site, to direct and for the execution of the work, together with their qualifications, experience, positions held and their nationalities.

DESIGNATION	NAME OF	NATIONALITY:	SUMMARY OF		NQF Level
	(i) NOMINEE (ii) ALTERNATE		QUALIFICATIONS	EXPERIENCE AND PRESENT OCCUPATION	
<u>CONTRACT MANAGEMENT</u> Project Manager					
<u>CONSTRUCTION SUPERVISION</u> Site Agent					
<u>CONSTRUCTION MONITORING</u> Foreman					
<u>CONSTRUCTION MONITORING</u> Safety Officer					

Signature..... Date

Name..... Position.....

Tenderer.....



Contractor



Witness 1




Witness 2



Employer



Witness 1



Witness 2

FORM N: SCHEDULE OF PLANT AND EQUIPMENT

The following are lists of major items of relevant equipment that I/we presently own or lease and will have available for this contract or will acquire or hire for this contract if my/our bid is accepted.

Details of major equipment that is owned by and immediately available for this contract.

Description	Manufacturer	Model	Capacity	Own or Hire

Letter of intent must be attached for any list of plant/equipment that will be leased/hired. Attach additional pages if more space is required.

Signature..... Date

Name..... Position.....

Tenderer.....



Contractor




Witness 1




Witness 2



Employer



Witness 1



Witness 2

FORM O: CENTRAL SUPPLIER DATABASE REGISTRATION

No bid will be considered without the bidder being registered on the CSD with an active profile and a Tax Compliant status. Bidders must attached a document from the CSD showing the name of the business and the CSD number to enable live verification from the system

This will be verified during evaluation and again during adjudication. Bidders should ensure that their status stays compliant.

ETENDER

*Contractor**Witness 1**Witness 2**Employer**Witness 1**Witness 2*

FORM P: CONSTRUCTION INDUSTRY DEVELOPMENT BOARD REGISTRATION

It is a compulsory requirement that the Municipality only appoint bidder with a suitable and active CIDB registration for construction projects. The requirement for this project is **6CE** or higher and the bidder must attach proof of registration.

Unfortunately, the Municipality don't have the capacity to appoint bidder Emerging into **6CE** or higher bidders must already be registered for **6CE**.

Bidder will not be considered if:

1. They are not registered with CIDB
2. They are not registered for the correct category
3. They are not registered for the correct minimum level of 6
4. The profile/registration is not active (this will be verified online during evaluation)
5. The bidder fail to attach proof.

CIDB registration no:

Category:

Signature..... Date

Name..... Position.....

Tenderer.....



Contractor




Witness 1




Witness 2



Employer



Witness 1





Witness 2

**FORM Q: COMPLIANCE WITH OCCUPATIONAL HEALTH AND SAFETY ACT,
1993 AND CONSTRUCTION REGULATIONS, 2014**

The bidder shall attach to this Form evidence that he is registered and in good standing with a compensation insurer who is approved by Department of Labour in terms of section 80 of the Compensation for Injury and Disease Act (COID) (Act 130 of 1993).

The bidder is required to disclose, by also attaching documentary evidence to this form, all inspections, investigations and their outcomes conducted by the Department of Labour into the conduct of the bidder at any time during the 36 months preceding the date of this bid.

*Contractor**Witness 1**Witness 2**Employer**Witness 1**Witness 2*

FORM S: SCHEDULE OF ESTIMATED MONTHLY EXPENDITURE

The bidder shall state his estimated value of the work to be completed every month, based on his preliminary programme and his bided unit rates, in the table below. The amounts for contingencies and contract price adjustment shall not be included.

MONTH	VALUE (INCLUDING VAT)
1	R
2	R
3	R
4	R
5	R
6	R
7	R
8.	
9	R
10	R
11 (FINAL)	R
TOTAL: R.....	
(EXCLUDING CONTINGENCIES AND CONTRACT PRICE ADJUSTMENT)	

Signature..... Date

Name..... Position.....

Tenderer.....



Contractor




Witness 1



Witness 2



Employer



Witness 1



Witness 2

FORM T: SCHEDULE OF LABOUR**RDP 1 (E) SCHEDULE OF LABOUR CONTENT**

The Bidder must complete the table below to reflect the labour force anticipated to be employed on this contract, including labour employed by sub-contractors. The specified target value is 10%.

Note: A minimum of 5% target value should be obtained from Local Labour content

Type of Labour	Man-days	Male	Female	Youth	Minimum Wage Rate per Unit	Total Wage Cost (Excl VAT)
Permanent Labour						
Temporary Labour						
SMME/HDI's Labour						
					TOTAL	
					PERCENTAGE	

Notes to Bidder:

- (1) Labour is defined as hourly paid personnel or personnel paid per task.
- (2) The penalty for non-compliance during the contract or for fraudulent disclosure is discussed in Section C3.3.1.5.

Signature..... Date

Name..... Position.....

Tenderer.....




Contractor




Witness 1



Witness 2



Employer



Witness 1



Witness 2

THE CONTRACT

PART C1: AGREEMENTS AND CONTRACT DATA

PART C2: PRICING DATA

PART C3: SCOPE OF WORK

PART C4: SITE INFORMATION

ETENDER

Contractor

Witness 1

Witness 2

Employer

Witness 1

Witness 2

EPHRAIM MOGALE LOCAL MUNICIPALITY

TABLE OF CONTENTS

PART C1: AGREEMENTS AND CONTRACT DATA (YELLOW COLOUR)

C1.1: FORM OF OFFER AND ACCEPTANCE

C1.2: CONTRACT DATA

C1.2.1: CONDITIONS OF CONTRACT

C1.2.2: PART A: CONTRACT DATA PROVIDED BY THE EMPLOYER

PART B: CONTRACT DATA PROVIDED BY THE CONTRACTOR

C1.3: FORM OF GUARANTEE

C1.4: AGREEMENT WITH ADJUDICATOR

C1.5: AGREEMENT IN TERMS OF SECTION 37(2) OF THE
OCCUPATIONAL HEALTH AND SAFETY ACT No 85 OF 1993

PART C2: PRICING DATA (YELLOW COLOUR)

C2.1: PRICING INSTRUCTIONS

C2.2: BILL OF QUANTITIES

PART C3: SCOPE OF WORK (BLUE COLOUR)

C3.1: STANDARD SPECIFICATIONS

C3.2: PROJECT SPECIFICATIONS

C3.3: PARTICULAR SPECIFICATIONS

PART C4: SITE INFORMATION (GREEN COLOUR)

C4.1: LOCALITY PLAN

C4.2: CONDITIONS ON SITE: GEOTECHNICAL REPORT

C4.3: BID DRAWINGS



Contractor




Witness 1




Witness 2



Employer



Witness 1



Witness 2

EPHRAIM MOGALE LOCAL MUNICIPALITY**MATLEREKENG SPORTS FACILITY****C1.1 FORM OF OFFER AND ACCEPTANCE****Offer**

The employer, identified in the acceptance signature block, has solicited offers to enter a contract for the procurement of:

Contract No. EPMLM/8/3/515: APPOINTMENT OF A CONTRACTOR FOR CONSTRUCTION OF MATLEREKENG SPORTS FACILITY

The bidder, identified in the offer signature block, has examined the documents listed in the bid data and addenda thereto as listed in the returnable schedules, and by submitting this offer has accepted the conditions of bid.

By the representative of the bidder, deemed to be duly authorized, signing this part of this form of offer and acceptance, the bidder offers to perform all of the obligations and liabilities of the contractor under the contract including compliance with all its terms and conditions according to their true intent and meaning for an amount to be determined in accordance with the conditions of contract identified in the contract data.

THE OFFERED TOTAL OF THE PRICES INCLUSIVE OF VALUE ADDED TAX IS:

.....

Rand (in words);

R (in figures)

This offer may be accepted by the employer by signing the acceptance part of this form of offer and acceptance and returning one copy of this document to the bidder before the end of the period of validity stated in the bid data, whereupon the bidder becomes the party named as the contractor in the conditions of contract identified in the contract data.

Signature Block: Bidder

Signature Date

Name

Capacity

Name of organization

Address of organization

.....

Signature of witness Date

Name of witness

.....



Contractor



Witness 1




Witness 2



Employer



Witness 1



Witness 2

Acceptance

By signing this part of this form of offer and acceptance, the employer identified below accepts the bidder's offer. In consideration thereof, the employer shall pay the contractor the amount due in accordance with the conditions of contract identified in the contract data. Acceptance of the bidder's offer shall form an agreement between the employer and the bidder upon the terms and conditions contained in this agreement and in the contract that is the subject of this agreement.

The terms of the contract, are contained in:

- Part C1: Agreements and contract data, (which includes this agreement)
- Part C2: Pricing data
- Part C3: Scope of work.
- Part C4: Site information
and drawings and documents or parts thereof, which may be incorporated by reference into Parts C1 to C4 above.

Deviations from and amendments to the documents listed in the bid data and any addenda thereto as listed in the bid schedules as well as any changes to the terms of the offer agreed by the bidder and the employer during this process of offer and acceptance, are contained in the schedule of deviations attached to and forming part of this agreement. No amendments to or deviations from said documents are valid unless contained in this schedule.

The bidder shall within two weeks after receiving a completed copy of this agreement, including the schedule of deviations (if any), contact the employer's agent (whose details are given in the contract data) for delivery of any bonds, guarantees, proof of insurance and any other documentation to be provided in terms of the conditions of contract identified in the contract data. Failure to fulfill any of these obligations in accordance with those terms shall constitute a repudiation of this agreement.

Notwithstanding anything contained herein, this agreement comes into effect on the date when the bidder receives one fully completed original copy of this document, including the schedule of deviations (if any). Unless the bidder (now contractor) within five working days of the date of such receipt notifies the employer in writing of any reason why he cannot accept the contents of this agreement, this agreement shall constitute a binding contract between the parties.

Signature Block: Employer	
Signature	Date
Name	
Capacity	
For the Employer: Municipal Manager Ephraim Mogale Local Municipality	
Signature of witness	Date
Name of witness	



Contractor




Witness 1




Witness 2



Employer



Witness 1



Witness 2

Schedule of Deviations

1. Subject

Details

2. Subject

Details

By the duly authorised representatives signing this agreement, the employer and the bidder agree to and accept the foregoing schedule of deviations as the only deviations from and amendments to the documents listed in the bid data and addenda thereto as listed in the bid schedules, as well as any confirmation, clarification or changes to the terms of the offer agreed by the bidder and the employer during this process of offer and acceptance.

It is expressly agreed that no other matter whether in writing, oral communication or implied during the period between the issue of the bid documents and the receipt by the bidder of a completed signed copy of this Agreement shall have any meaning or effect in the contract between the parties arising from this agreement.

For the Bidder:

Signature(s) _____

Name(s) _____

Capacity _____

(Name and address of organization)

Name &
Signature of
Witness

For the Employer:

Signature(s) _____

Name(s) _____

Capacity _____

(Name and address of organization)

Name &
Signature of
Witness



Contractor




Witness 1




Witness 2



Employer



Witness 1



Witness 2

EPHRAIM MOGALE LOCAL MUNICIPALITY**MATLEREKENG SPORTS FACILITY****C1.2 Contract Data**

Section 1.01 The General Conditions of Contract for Construction Works (edition 2015) published by the South African Institution of Civil Engineering, is applicable to this contract. Copies of these conditions of contract may be obtained from the South African Institution of Civil Engineering (Tel: 011-805 5947).

The General Conditions of Contract for Construction Works make several references to the Contract Data for specific data, which together with these conditions collectively describe the risks, liabilities and obligations of the contracting parties and the procedures for the administration of the Contract. The Contract Data shall have precedence in the interpretation of any ambiguity or inconsistency between it and the general conditions of contract.

Each item of data given below is cross-referenced to the clause in the General Conditions of Contract for Construction Works to which it mainly applies.



Contractor




Witness 1




Witness 2



Employer



Witness 1



Witness 2

C1.2.1 CONDITIONS OF CONTRACT

GENERAL CONDITIONS OF CONTRACT

This Contract will be based on the "General Conditions of Contract for Construction Works - (edition 2015)", issued by the South African Institution of Civil Engineering (Short title: "**General Conditions of Contract 2015**") and can be obtained from:

SAICE

Waterfall Park
Howick Gardens
Vorna Valley Half way House
Becker Street
MIDRAND
1685
Gauteng Province
Tel: (011) 805-5947/8
Fax: (011) 805-5971.

It is agreed that the only variations from the General Conditions of Contract 2015 are those set out hereafter under "Special Conditions of Contract".

SPECIAL CONDITIONS OF CONTRACT

1. GENERAL

These Special Conditions of Contract (SCC) form an integral part of the Contract. The Special Conditions shall amplify, modify or supersede, as the case may be, the General Conditions of Contract 2015 to the extent specified below, and shall take precedence and shall govern.

The clauses of the Special Conditions hereafter are numbered "SCC" followed in each case by the number of the applicable clause or sub clause in the General Conditions of Conditions 2015, and the applicable heading, or (where a new special condition that has no relation to the existing clauses is introduced) by a number that follows after the last clause number in the General Conditions, and an appropriate heading.

2. ADDITIONAL SPECIAL CONDITIONS OR AMENDMENTS TO THE GENERAL CONDITIONS OF CONTRACT

2.1 General

The following clauses add to, vary or otherwise amend the General Conditions of Contract:

2.1.1 Cession (CL 2.5.1)

Delete the words "without the written consent of the other".

2.1.2 Contractor's Superintendence (CL 4.12)

Add the following sub-clause 4.12.4 to Clause 4.12:

"Where a form is included in the Appendix to the Contract Data for this purpose, the Bidder shall fill in the name of the person he proposes to entrust with the post of Contractor's Site Agent on this Contract in the space provided therefor. Previous experience of this person on work of a similar nature during the past five (5) years is to be entered in the list.

The Contractor's Site Agent shall be on Site at all times when work is being performed.

The person as approved of by the Municipality in writing shall not be replaced or removed from Site without the written approval of the Municipality."

2.1.3 Programme (CL 5.6)

Add the following sub-clause 5.6.6 to Clause 5.6:

“Failure on the part of the Contractor to deliver to the Municipality, the

- programme of the Works in terms of Clause 5.6.1 and
- supporting documents in terms of Clause 5.6.2

Within the period stated in the Contract Data, shall be sufficient cause for the Municipality to retain 25 per centum of the value of the Fixed Charge and Value-related items in assessment of amounts due to the Contractor, until the Contractor has submitted aforementioned first Programme of the Works and Supporting Documents”.

2.1.4 Contractor's Designs and Drawings (CL 5.9.7)

“All designs, calculations, drawings and operation and maintenance manuals shall be fully endorsed by a third party registered engineer, accomplished in such specific field of practice and the cost thereof shall be borne solely by the Contractor.

Once the alternative design has been approved, the Contractor shall indemnify and hold harmless the Municipality (the Employer), their agents and assigns, against all claims howsoever arising out of the said design, whether in contract or delict”

2.1.5 Suspension of the Works (CL 5.11)

Add the following sub-clause 5.11.4 to Clause 5.11:

“If the Contractor does not receive from the Employer the amount due under an Interim Payment Certificate within 28 days after expiry of the time stated in sub-clause 6.10.4 within which payment is to be made (except for deductions in accordance with sub-clauses 6.10.1.6 and 6.10.1.7), the Contractor may, after giving 14 days' notice to the Employer, suspend the progress of the Works.

The Contractor's action shall not prejudice his entitlements to a claim in terms of Clause 10.1 and to cancellation of the Contract in terms of Clause 9.3.

If the Contractor subsequently receives full payment of the amount due under such Interim Payment Certificate before giving a notice of cancellation of the Contract, the Contractor shall resume normal working as soon as is reasonably practicable.”

2.1.6 Extension of Time Arising from Abnormal Rainfall (CL 5.12)

Add the following to sub-clause 5.12.2.2 :

“The extension of time to be allowed due to abnormal rainfall shall be calculated separately for each calendar month or part thereof in accordance with the formula stated on the Clause 5.12 on above table under Contract Data :

The rainfall records which shall provisionally be accepted for calculation purposes are:

Based on records taken at:

**Rainfall Station: MARBEL HALL Lat: 24° 54'
58.89" S Lon: 29° 25' 20.18" E
Height 928 m**

Average No of Days with Rainfall exceeding 10mm: 48 days/year

Average Rainfall:

471 mm/year

Years of record: 1991-2021

Month	Average rainfall for calendar month Rn	Average number of days for calendar month on which a rainfall of 10 mm or more were recorded Nn
	(mm)	(days)
January	85	8
February	63	6
March	58	6
April	32	3
May	13	2
June	4	1
July	3	0
August	4	1
September	11	1
October	42	5
November	76	8
December	80	9

The factor $(Nw - Nn)$ shall be considered to represent a fair allowance for days during which rainfall exceeds 10 mm and the factor $(Rw - Rn)/x$ shall be considered to represent a fair allowance for those days when rainfall does not exceed 10 mm but wet conditions prevent or disrupt work.

The total extension of time shall be the algebraic sum of all monthly totals for the contract period, but if the algebraic sum is negative the time for completion shall not be reduced due to subnormal rainfall. Extensions of time for a part of a month shall be calculated using pro rata values of Nn and Rn ."

2.1.7 Guarantee (Security) (CL 6.1)

Delete the contents of the first paragraph of Clause 6.2 and insert:

"The Contractor shall deliver to the Employer within such time as may be stated in the Contract Data a Demand Guarantee, of Insurance Company registered in terms of the Short-term Insurance Act (Act 53 of 1998) or registered Commercial Bank, in a sum equal to the amount stated in the Contract Data. The Demand Guarantee shall be issued by an entity approved by the Employer, and shall conform in all respects to the format contained in the Appendix to the Contract Data.

Wherever a joint venture constitutes the contracting party, the Demand Guarantee shall be issued on behalf of the joint venture.

Failure to produce an acceptable Demand Guarantee within the period stated in Clause 2.2.8 of the Contract Data is a fundamental breach of Contract, entitling the Employer to cancel the Contract by due notice in terms of Clause 9.2 with specific reference to sub-clause 9.2.2.5 as amended in the Special Conditions of Contract."

2.1.8 Variations (CL 6.3)

Omit the words "Provided that" under Clause 6.3.2 and omit Clause 6.3.2.1.

2.1.9 Interim Payments (CL 6.10.1)

Add to the end of Clause 6.10.1 the following paragraph:

“The Contractor shall complete the ‘Contractor’s Monthly Report Schedule’, which pro forma documentation is obtainable from the Municipality. Pursuant to Sub-Clause (1), these, duly signed by all concerned, together with the Contractor’s statement and a VAT invoice in original format are to be submitted to the Municipality. Issue by the Contractor of any signed payment certificate is conditional to this information being fully endorsed, accurately and timeously submitted to the Municipality”.

Add to the end of Clause 6.10.1.5 the following paragraph:

“All documentary evidence of such materials shall be unambiguous with respect to ownership having fully passed to the Contractor on or before the date of submittal of the Contractor’s monthly statement.

Should the Contractor fail to supply unambiguous documentary evidence, he shall, prior to submittal of his monthly statement, deliver to the Employer a Guarantor Guarantee in the form contained in the Appendices to the Contract Data.”

2.1.10 Variations Exceeding 15 Per Cent (CL 6.11)

In sub-clause 6.11.1.3 omit the words “15 per cent” and replace with “20 per cent”.

2.1.11 Insurances (CL 8.6)

2.1.11.1 Contractor to produce proof of payment

Delete sub-clause 8.6.6 and substitute with:

“The Contractor shall before commencement of the Works produce to the Municipality:
8.6.6.1 The policies by which the insurances are effected,

8.6.6.2 Proof that due payment of all premiums there under, covering the full required period has been made, and

8.6.6.3 Proof of continuity of the policies for the required period.

Should, during the currency of the Contract, the required period of insurance be extended for any reason, the Contractor shall timeously extend (so as to maintain) the said insurances for the full extended duration.

The Municipality shall be empowered to withhold all payment certificates until the Contractor has complied with his obligations in terms of this Clause 8.6.”

2.1.11.2 Remedy of Contractor’s failure to insure

Delete sub-clause 8.6.7 and substitute with:

“Failure on the part of the Contractor to effect and keep in force any of the insurances referred to in Clause 8.6.1 and its sub-clauses, is a fundamental breach of Contract, entitling the Employer to cancel the Contract by due notice in terms of Clause 9.2 and

with specific reference to sub-clause 9.2.2.5, as amended, in the Special Conditions of Contract.”

2.1.12 Termination of the Contract (CL 9.1)

Alter the numbering of:

Clause 9.1.5 to 9.1.6,
Clause 9.1.6 to 9.1.7 and

insert the following new clause 9.1.5:

“The Employer shall be entitled to cancel the Contract, at any time for the Employer’s convenience, by giving written notice of such cancellation to the Contractor. The termination shall take effect 28 days after the later of the dates which the Contractor receives this written notice or the Employer returns the Demand Guarantee. The Employer shall not cancel the Contract under this sub-clause in order to execute the Works himself or to arrange for the Works to be executed by another contractor.

This restriction on the Employer shall lapse 18 months after the date of receipt by the Contractor of cancellation in terms of this sub-clause”.

2.1.13 Termination by Employer (CL 9.2)

Delete the contents of Clause 9.2 and substitute with:

“9.2.1 The Employer may terminate the Contract by written notice to the Contractor if:

9.2.1.1 Sequestration of the Contractor’s estate is ordered by a Court with due jurisdiction, or

9.2.1.2 The Contractor publishes a notice of surrender or presents a petition for the surrender of his estate as insolvent, or makes a compromise with his creditors, or assigns in favour of his creditors, or agrees to carry out the Contract under the supervision of a committee representing his creditors, or (being a company) goes into liquidation, whether provisionally or finally (other than a voluntary liquidation for the purpose of amalgamation or reconstruction), or if the Contractor assigns the Contract without having first obtained the Employer’s consent in writing, or if execution is levied on his goods, or

9.2.1.3 The Contractor, or anyone on his behalf, or in his employ, offers to any person in the employ of the Employer or the Engineer, a gratuity or reward or commission, or

9.2.1.4 The Contractor furnished materially inaccurate information in his Bid, which had a bearing on the award of the Contract, or

9.2.1.5 The Contractor has abandoned the Contract

9.2.2 If the Contractor:

9.2.2.1 Has failed to commence the Works in terms of Clause 5.3 hereof, or has suspended the progress of the Works for fourteen (14) days after receiving from the Engineer written notice to proceed, or

9.2.2.2 Has failed to provide the Guarantee in terms of Clause 6.2 within the time stipulated in the Contract Data, or

- 9.2.2.3 Has failed to proceed with the Works with due diligence, or
- 9.2.2.4 Has failed to remove materials from the Site or to pull down and replace work within fourteen (14) days after receiving from the Engineer written notice that the said materials or work have been condemned and rejected by the Engineer in terms of these conditions, or
- 9.2.2.5 Is not executing the Works in accordance with the Contract, or is neglecting to carry out his obligations under the Contract, or
- 9.2.2.6 Has, to the detriment of good workmanship or in defiance of the Engineer's instructions to the contrary, sublet any part of the Contract, or
- 9.2.2.7 Has assigned the Contract or any part thereof without the Employer's consent in writing, then the Employer may give the Contractor 14 days' notice to rectify the default, and if the Contractor fails to rectify the default in said 14 days, then, without further notice, notify the Contractor in writing of the termination of the Contract and expel the Contractor and order the Contractor to vacate the site within 24 hours of issue of the Notice of Termination and to hand the Site over to the Employer, and the Employer may then enter upon the Site and the Works without affecting the rights and powers conferred on the Employer or the Engineer by the Contract and the Employer may himself complete the Works or may employ another contractor to complete the Works, and the Employer or such other contractor may use for such completion so much of the Construction Equipment, Temporary Works and materials brought onto the Site by the Contractor as the Employer may think proper, and the Employer may at any time sell any of the said Construction Equipment, Temporary Works and unused materials and apply the proceeds of sale towards payment of any sums that may be due or become due to the Employer by the Contractor under the Contract. In such circumstances the Contractor shall forthwith vacate the Site and shall not be entitled to remain on the Site on the grounds that he is entitled to do so on a right of retention until amounts due to him have been paid, neither will the Contractor be entitled to any further payments in terms of this Contract.
- 9.2.3 If the Contractor, having been given notice to rectify a default in terms of 55.2 above, rectifies said default, but later repeats the same or substantially the same default, then the Employer may notify the Contractor of the immediate termination of the Contract, and proceed as stated in the paragraph following the word "writing" in Clause 55.2.7 above.
- 9.2.4 Should the amounts the Employer must pay to complete the Works exceed the sum that would have been payable to the Contractor on duon by him, then the Contractor shall upon demand pay to the Employer the difference, and it shall be deemed a debt due by the Contractor to the Employer and shall be recoverable accordingly. Provided that should the Contractor on demand not pay the amount of such excess to the Employer, such sum may be determined and deducted by the Employer from any sum due to or that may become due to the Contractor under this or any previous or subsequent contract between the Contractor and the Employer."

2.1.14 Termination by the Contractor (CL 9.3)

Add the following paragraph as Clause 9.3.5:

"In addition to, or as an alternative to the rights to termination contained in this Clause 9.3, the Contractor may notify the default to the Employer, with a copy to the Engineer, and if the default is not rectified within 10 days the Contractor may suspend progress of the works until a date 7 days after the default is rectified. The Contractor shall be entitled to extension of time to the extent of delay caused by or resulting from such suspension, and to payment of additional costs

caused by or resulting from the suspension. Such extension of time and additional costs shall be promptly ascertained by the Engineer, who shall then grant the extension of time and include the additional costs in all future payment certificates. Such suspension, extension of time and/or payment of additional costs, shall not prejudice the Contractor's rights to cancel the contract."

3. **PRIORITY OF DOCUMENTS**

The documents forming the Contract are to be taken as mutually explanatory of one another. For the purpose of interpretation, the priority of the documents shall be in accordance with the following sequence:

- a) the Form of Offer and Acceptance.
- b) amplifications of the General Conditions of Contract within the Contract Data.
- c) additional special conditions or amendments to the General Conditions of Contract within the Contract Data.
- d) the General Conditions of Contract.
- e) the Specifications, Drawings, Schedules and other documents forming part of the Contract (in that order) contained in the Scope of Work and the Site Information.

If any ambiguity or discrepancy is found in the documents, the Engineer shall issue any necessary clarification or instruction.

4. **TRANSFER OF RIGHTS**

TRANSFER OF RIGHTS AND INDEMNITY (To be completed during construction by successful Bidder only)

Claim for materials on site, Payment Certificate No.
Date:

Contract No: for (contract title)

I, the undersigned (name of signatory) in my capacity as

..... of (name of Contractor)

duly authorized hereto on behalf of the Contractor hereby transfer, cede and assign all the Contractor's rights, title and interest in and to the materials and goods, for which evidence of bona fide ownership is attached hereto, unto and in favour of (name of Employer) insofar as the Contractor retains actual control of the materials and goods, the right of ownership thereof passes to the Employer by *constitutum possessorium*.

I herewith indemnify the Employer against any claim to and in respect of said materials by reason of the Contractor's sequestration or liquidation or of any defect in the Contractor's title to the materials and agree that no payment for materials on site will be made by the Employer until such time as I have submitted documentary proof of bona fide ownership of the said materials and goods.

This transfer shall become effective upon conclusion of the Contractor receiving payment from the Employer or from any other person on behalf of the Employer for the materials and goods as Materials on Site, payment of retention money thereon excluded.

I further confirm that I am fully responsible for all materials and goods listed under this Transfer of Rights and that they have been insured adequately against all risks and will remain insured until they are built into or used in the permanent works and taken over by the Employer.

This certificate of Transfer of Rights applies only to the materials and goods as listed in the following table:

Description of Item	Unit	Quantity	Rate	Amount	Supplier
Total Value of Materials and goods					

Signed by: **Date:**
for and on behalf of the Contractor.

Witnessed by: **Date:**

NOTE: This form, together with the documentary proof of ownership or proof of payment by the Contractor to the supplier, shall accompany the Contractor's claim for payment for materials on site in terms of **Clause 6.10.1.5 of the General Conditions of Contract 2010**.

C1.2.2 PART A: CONTRACT DATA PROVIDED BY THE EMPLOYER**REFERENCE CONTRACT SPECIFIC DATA BY THE EMPLOYER**

The following variations and additions to the General Conditions of Contract for Construction Works, Third Edition (2015), shall apply to this contract:

NB: For purposes of interpretation of concept in this contract, we shall use interpretation as contained in the General Conditions of Contract for Construction Works, Third Edition (2015) unless expressly contained in this contract.

States the applicable conditions of contract and associated contract specific data that collectively describe the risks, liabilities and obligations of the contracting parties and the procedures for the administration of the contract

The employer shall include the following clause in the conditions of contract It will be a condition of contract that:

The contractor shall achieve in the performance of the contract the Contract Skills Development Goal (CSDG) established in the cidb Standard for Developing Skills through Infrastructure Contracts, published in Gazette Notice No.48491 of 28 April 2023.

The contractor shall achieve in the performance of the contract the Contract Participation Goals (CPG) relating to the engagement of targeted enterprises as established in the cidb Standard for Indirect Targeting for Enterprise Development through Construction works Contracts, published in Gazette Notice No.36190 of 25 February 2013

CLAUSE / SUB-CLAUSE	DESCRIPTION	VARIATION / ADDITION										
1.1	Definitions	1.1.1.1 The Employer means <u>Add</u> the following to the clause: It means Ephraim Mogale Local Municipality Address of Employer: <u>Physical:</u> <u>Postal:</u> The Employer’s address for receipt of communications is <table><tr><td>13 Ficus street</td><td>P.O.Box 111</td></tr><tr><td>Marble Hall</td><td>Marble Hall</td></tr><tr><td>0450</td><td>0450</td></tr><tr><td>Telephone No: 013 261 8471</td><td>Fax No: 013 261 4055</td></tr><tr><td>smarima@emogalelm.gov.za</td><td></td></tr></table>	13 Ficus street	P.O.Box 111	Marble Hall	Marble Hall	0450	0450	Telephone No: 013 261 8471	Fax No: 013 261 4055	smarima@emogalelm.gov.za	
		13 Ficus street	P.O.Box 111									
		Marble Hall	Marble Hall									
0450	0450											
Telephone No: 013 261 8471	Fax No: 013 261 4055											
smarima@emogalelm.gov.za												
1.1.1.3 Certificate of Completion <u>Add</u> the following to the clause: <i>Unless specified otherwise in the Contract Data, separate Certificates of Completion will not be issued for portions or phases of the Works.</i>												
		1.1.1.9 Contractor means. <u>Add</u> the following to the clause: The Tenderer.										

CLAUSE / SUB-CLAUSE	DESCRIPTION	VARIATION / ADDITION
		1.1.1.10 Contract Price means <u>Add</u> the following to the clause: Firm price as contained in the form of Offer and Acceptance
		1.1.1.13 Defects Liability Period means <u>Add</u> the following to the clause: Period of 12 months after issuing of Certificates of Completion
		1.1.1.14 Due Completion Date means <u>Add</u> the following to the clause: For a period of Nine (9) months commencing from the date of the signature by the employer
		1.1.1.16 Employers Agent is <u>Add</u> the following to the clause: Bashimane Consulting Engineers (Pty) Ltd. Clause 1.2.1: Address of Engineer: <u>Physical:</u> 1057 Mareleng Section Masemola 1057 <u>Postal:</u> P.O.Box 603 Masemola 1057 The Engineer's address for receipt of communications is: 1057 Mareleng Section P.O.Box 603 Masemola Masemola 1057 1057 E-Mail: namanyanejaphta@gmail.com
		1.1.1.24 Practical Completion means <u>Add</u> the following to the clause: <i>This clause shall apply mutatis mutandis to any portion or phase of the Works that may be described in the Scope of Works or in the Contract Data, or agreed subsequently between the Contractor and the Employer, and committed to writing.</i> Nine (9) months commencing from the date of the signature by the employer
		<u>Add</u> the following new clause:

CLAUSE / SUB-CLAUSE	DESCRIPTION	VARIATION / ADDITION
		1.1.1.35 <i>Construction Work Permit</i> <i>Construction Work Permit” means a statutory permit as defined in the Construction Regulations 2014.</i> <i>No works shall be carried out without all required permit.</i>
1.2.1	Delivery of notices	Add the following to the clause: 1.2.1 <i>Sent by email, electronic text messages or any like communication irrespective of time of transmission;</i> <i>All form of notices shall be collected and signed for at the Employer’s Legal Services.</i>
2.4.1	Ambiguity or Discrepancy	Delete the contents of the clause and insert the following: <i>The documents forming the Contract are to be taken as mutually explanatory of one another. For the purposes of interpretation, the priority of the documents shall be in accordance with the following sequence, listed from highest to lowest priority:</i> a) <i>Form of Offer and Acceptance</i> b) <i>Contract Data</i> c) <i>General Conditions of Contract</i> d) <i>Drawings</i> e) <i>Scope of Work</i> f) <i>Standard Specifications</i> g) <i>Bill of Quantities</i> h) <i>any other documents forming part of the Contract</i> <i>Upon finding any ambiguity in, or discrepancy between, or otherwise any error in the documents, the Contractor shall forthwith advise the Employer’s Agent thereof before applying an interpretation in accordance with the above priority. If, after applying the above priority, an ambiguity in, or discrepancy between, or otherwise any remaining error in the documents remains, the Employer’s Agent shall provide the necessary clarification or instruction.</i>
3.2.3	Specific approval of the Employer required	Replace clause 3.2.3 with the following: <i>In addition to the functions or duties set out in the Contract Data under Data Provided by The Employer, the Employer’s Agent is required to obtain the specific prior approval of the Employer for:</i> 3.2.3.1 <i>certification of expenditure that exceeds the Contract Price in terms of Clause 1.1.1.10;</i> 3.2.3.2 <i>issuing of an order to suspend the progress of the Works in terms of Clause 5.11.2, the extra cost resulting from which order is to be borne by the Employer or the effect of which is</i>

CLAUSE / SUB-CLAUSE	DESCRIPTION	VARIATION / ADDITION
		<i>liable to give rise to a claim by the Contractor for an extension of time under Clause 5.12 of these conditions;</i> 3.2.3.3 <i>issuing of an instruction or order to vary the nature or quantity of the Works in terms of Clause 6.3, the estimated effect of which will be to increase the Contract Price any amount exceeding Contract Price, the evaluation of all variation orders in terms of Clause 6.4 and the adjustment of the sum(s) tendered for General Items in terms of Clause 6.11; or</i> 3.2.3.4 <i>Pending approval of any claim submitted by the Contractor in terms of Clause 10.1.</i> 3.2.3.5 <i>The Employers Agent shall have fourteen (14) day to source all required approvals or permit(s)commencing from the date it became required.</i> 3.2.3.6 <i>The Tenderer shall have fourteen (14) days to source all required approvals or permit(s) commencing from the date it became required.</i>
4.1.2	Contractor's liability for own design errors	Add the following to the clause: <i>The Contractor shall provide the following to the Employer's Agent for retention by the Employer or his assignee in respect of all works designed by the Contractor:</i> 4.1.2.1 <i>A Certificate of Stability of the Works signed by a registered Professional Engineer confirming that all such works have been designed in accordance with the appropriate codes of practice.</i> 4.1.2.2 <i>Proof of registration and of adequate and current professional indemnity insurance cover held by the designer(s).</i> 4.1.2.3 <i>Design calculations should the Employer's Agent request a copy thereof.</i> 4.1.2.4 <i>Engineering drawings and workshop details (both signed by the relevant professional engineer), in order to allow the Employer's Agent to compare the design with the specified requirements and to record any comments he may have with respect thereto.</i> 4.1.2.5 <i>"As-Built" drawings in DXF electronic format after completion of the Works.</i> <i>The Contractor shall be responsible for the design of the Temporary Works.</i>
4.3	Legal Provisions	Add the following new sub-clause:

CLAUSE / SUB-CLAUSE	DESCRIPTION	VARIATION / ADDITION
		1.3.3 <i>Wages and conditions of work:</i> i. <i>For conventional construction works the Basic Conditions of Employment Act of 1997 (Act No 75 of 1997) shall apply and the minimum employment conditions which will apply shall be guided by the Bargaining Council for the Civil Engineering Industry Collective Agreement as published from time to time.</i> ii. <i>The current Ministerial Determination (also downloadable at www.epwp.gov.za), Expanded Public works Programs, issued in terms of the Basic Conditions of Employment Act of 1997 by the Minister of Labour in Government Notice R347, shall apply to the works described in the scope of works as being labour-intensive and which are undertaken by unskilled or semi-skilled workers.</i> Add the following new sub-clause: 4.3.4 <i>Notwithstanding any actions which the Employer may take, the Contractor accepts sole liability for due compliance with the relevant duties, obligations, prohibitions, arrangements and procedures imposed by the Occupational Health and Safety Act, 1993 (Act 85 of 1993), and all its regulations, including the Construction Regulations, 2014, for which he is liable as mandatory. By entering into this Contract it shall be deemed that the parties have agreed in writing to the above provisions in terms of Section 37(2) of the Act. The Contractor shall sign the Occupational Health and Safety Agreement for Contract Work in the (Employer) included in section C1.5.</i> Add the following new sub-clause: 4.3.5 <i>The Employer retains an interest in all inquiries conducted under this Contract in terms of Section 31 and/or 32 of the Occupational Health and Safety Act, 1993 (Act 85 of 1993) and its Regulations following any incident involving the Contractor and/or Sub-Contractor and/or their employees. The Contractor shall notify the Employer in writing of all investigations, complaints or criminal charges which may arise pursuant to work performed under this Contract in terms of the Occupational Health and Safety Act, 1993 (Act 85 of 1993) and Regulations.</i>

CLAUSE / SUB-CLAUSE	DESCRIPTION	VARIATION / ADDITION
		Add the following new sub-clause: 4.3.6 <i>Contractor's Designer</i> <i>The Contractor and his designer shall accept full responsibility and liability to comply with the Occupational Health and Safety Act, 1993 (Act 85 of 1993) and the Construction Regulations, 2014 for the design of the Temporary Works and those part of the Permanent Works which the Contractor is responsible to design in terms of the Contract</i>
		Add the following new sub-clause: 4.3.7 <i>Construction Work Permit</i> <i>Unless duly exempted or otherwise duly agreed with the Contractor, the Employer shall forthwith, where a Construction Work Permit in terms of Regulation 3(1) of the Construction Regulations 2014 is required to be obtained by the Employer without derogation from the Employer's duties, the Employer or his duly appointed Construction Health and Safety Agent in terms of Regulation 5(6) or otherwise, upon the Construction Work Permit becoming available, issue it to the Employer's Agent, who, in turn, shall forthwith issue it to the Contractor.</i> <i>Notwithstanding anything stipulated to the contrary in these Conditions, the Contractor shall not be entitled to any claim or extension of time arising from any delay in obtaining a Construction Work Permit which has been duly applied for, unless such delay exceeds 84 consecutive days.</i>
4.4	Subcontracting whole Contract	Subcontracting Add the following new sub-clause 4.4.1 <i>the contractor shall not subcontract the whole contract. The subcontract shall be a minimum of 5% of the total project value to targeted enterprises in line with C3.3.2.1 Scope of Mandatory Subcontract Works.</i>
5.3.3	Time to instruct the commencement of the works	Replace both periods of "7 days" in Clause 5.3.3 with "14 days".
5.6.1	Programme of works	Add the following to the clause: <i>The Contractor shall have regard for the phases and sub-phases (if applicable) for the Works, which shall also be the order in which the Permanent Works shall be constructed, unless otherwise agreed between</i>

CLAUSE / SUB-CLAUSE	DESCRIPTION	VARIATION / ADDITION
Clause 5.6.1 & 5.6.2:		<i>the parties and committed to writing. If phased construction is applicable, the phases and sub-phases will be described in the Scope of Works and/or will be indicated on the Phasing Plan which forms part of the Drawings.</i> <i>The Contractor shall deliver to the Engineer, within 14 days calculated from the Commencement Date, a realistic programme in terms of Clause 5.6.1 and supporting documents in terms of Clause 5.6.2</i>
5.7.1	Rate of progress	Delete the last paragraph of the clause and replace with the following: <i>No instruction by the Employer's Agent to the Contractor to improve his rate of progress in this regard will qualify for additional compensation, unless the instruction explicitly states that the Contractor is entitled to additional compensation and cites the amount of such compensation or the basis upon which it is to be determined.</i>
5.9.2	Further drawings and instructions	Add the following to the clause: <i>All instructions shall be in writing</i>
5.12	Extension of time for Practical Completion	Add the following new sub-clause 5.12.5 Critical path provision <i>A delay in so far as extension of time is concerned, will be regarded as a delay only if, on a claim by the Contractor in accordance with the General Conditions of Contract, the Employer's Agent rules that all progress on an item or items of work on the critical path of the approved programme for the execution of the Works by the Contractor, has been brought to a halt. Delays on normal working days only, based on a working week, of five normal working days, will be taken in account for the extension of time.</i> Add the following new sub-clause 5.12.6 Extension of time due to abnormal rainfall <i>Extension of time due to abnormal rainfall shall be determined by means of Method 1, if rainfall records and/or values derived from rainfall records are supplied in the Scope of Work, otherwise Method 2 shall apply.</i> <u>Method 1: Rainfall formula method</u> <i>The rainfall records and/or values derived from rainfall records from a suitable rainfall station near the Site, which are supplied in the Project Specifications, shall be considered suitable for the</i>

CLAUSE / SUB- CLAUSE	DESCRIPTION	VARIATION / ADDITION
		<i>determination of extension of time due to abnormal rainfall in accordance with this method.</i> <i>Extension of time arising from abnormal rainfall, shall be calculated separately for each calendar month or part thereof for the full period of completion of the Contract, including any extension thereof, in accordance with the rainfall formula given below:</i> $V = (N_w - N_n) + \frac{(R_w - R_n)}{X}$ <i>If V is negative and its absolute value exceeds N_n, then V shall be equal to minus N_n.</i> <i>If V is positive and greater than the number of calendar days in the calendar month under consideration, V shall be taken as equal to the number of calendar days in the relevant calendar month.</i> <i>The symbols shall have the following meaning:</i> <i>V = Extension of time in calendar days in respect of the calendar month under consideration</i> <i>N_w = Actual number of days during the calendar month on which a rainfall of Y mm or more has been recorded.</i> <i>R_w = Actual rainfall in mm for the calendar month under consideration.</i> <i>N_n = Average number of days as derived from existing rainfall records, on which a rainfall of Y mm or more has been recorded for the calendar month. Rainfall records and/or the derived values of N_n will be provided in the Specifications.</i> <i>R_n = Average rainfall in mm for the calendar month, as derived from existing rainfall records. Rainfall records and/or the derived values of R_n will be provided in the Project Specifications.</i> <i>X = 20 unless otherwise provided in the Project Specifications</i> <i>Y = 10 unless otherwise provided in the Project Specifications</i>

CLAUSE / SUB- CLAUSE	DESCRIPTION	VARIATION / ADDITION
		<i>The total extension of time shall be the algebraic sum of the monthly totals for the period under consideration. However, if the grand total is negative the time for completion shall not be reduced on account of abnormal rainfall. Extension of time for parts of a month shall be calculated by pro rata values of N_n and R_n being used.</i> <i>The factor $(N_w - N_n)$ shall be considered to represent a fair allowance for variations from the average number of days during which rainfall exceeds Y mm and wet conditions prevented or disrupted work.</i> <i>The factor $\frac{(R_w - R_n)}{X}$ shall be considered to represent a fair allowance for variations from the allowance for variations from the average number of days when wet conditions further to that allowed for the factor $(N_w - N_n)$, prevented or disrupted work during the calendar month.</i> <i>Accurate rain gauging shall be taken at a suitable point on Site and the Contractor shall, at his own expense, take all necessary precautions to ensure that the rain gauges cannot be interfered with.</i> <i>This formula does not take into account further on concurrent delays which could be caused by other abnormal climatic conditions such as floods, which have to be determined separately in accordance with Sub-Clause (5.12.5 Critical Plath Provision) hereof.</i> <u><i>Method 2: Expected delay method</i></u> <i>The Contractor shall make provision in his programme for the execution of the Works, for an expected delay of "n" normal working days (based on a working week of five normal working days) due to normal rainfall, for which he will not receive any extension of time.</i> <i>Unless otherwise provided in the Project Specifications, the value of "n" shall be taken as equal to the tendered time for completion of the Works in months, rounded off to an integer.</i> <i>Extension of time during normal working days will be granted to the degree to which actual delays as determined in accordance</i>

CLAUSE / SUB-CLAUSE	DESCRIPTION	VARIATION / ADDITION
		with Sub-Clause (5.12.5 Critical Path Provision) hereof, exceed the number of "n" normal working days. The value of "n" does not take into account further or concurrent delays which are caused by other abnormal climatic conditions such as floods, which have to be determined separately in accordance with Sub-Clause (5.12.5 Critical Path Provision) hereof.
5.13	<u>Penalty for delay</u>	<u>Penalty for Delay</u> <u>Add</u> the following new sub clause: 5.13 In the event of any of the parties being deemed to have committed an act of default, the other party shall give written notice (without prejudice to any other rights that it may have in law) calling upon the defaulting party to rectify such deemed act of default within a period of seven (07) working days to after the date of such notice Clause 5.13.1: The penalty for failing to complete the works is R5000.00 of the Total Bid Sum per Calendar Day
5.17	Penalty for noncompliance	<u>Add</u> the following new sub clause: 5.17.1 Faulty Workmanship or Materials This section also covers the removal of existing road studs, and the supply and fixing of road studs as ordered by the Employer's Agent. The contractor shall ensure not to repaint or paint new traffic markings not in compliance with Legislation or as specified by the Employer's Agent on the drawings. A fixed penalty of R5 000,00 per occurrence shall be deducted for each and every occurrence of non-compliance with any of the requirements of this specification. <u>Add</u> the following new sub clause: 5.17.2 Road Markings / other markings; On all newly constructed traffic calming measures are to be painted on the day of construction and before nightfall. A non-performance penalty of R5 000,00 per day per measure will be applicable <u>Add</u> the following new sub clause: 5.17.3 All Traffic Accommodation measures; As per SARTSM Vol. 2 Chapter 13 .must be adhere to for all measures during construction. A non-compliance penalty of R5 000,00 per day per measure will be applicable. All work to be stopped immediately until all remedial measures are in place in accordance with specification.

CLAUSE / SUB-CLAUSE	DESCRIPTION	VARIATION / ADDITION
6.1	Payment to Contractor	Add the following new sub-clause: 6.1.2 <i>Payment for works identified in the Scope of Work as being labour-intensive shall only be made in accordance with the provisions of the Contract if the works are constructed strictly in accordance with the provisions of the Scope of Work. Any non-payment for such works shall not relieve the Contractor in any way of his obligations either in contract or in delict.</i>
		Add the following new sub-clause: 6.1.3 <i>The Contractor's payment invoices shall be accompanied by labour information for the corresponding period in a format specified by the employer. If the Contractor chooses to delay submitting payment invoices, labour returns shall still be submitted as per frequency and timeframe stipulated by the employer. The Contractors invoices shall not be paid until all pending labour information has been submitted.</i>
		Add the following new sub-clause 6.1.4 <i>The Contractor shall be paid at the Municipality in the currency of the Republic of South Africa only at the Office of the Chief Financial Officer of the Municipality, unless otherwise stated in the Data provided by Employer.</i>
6.2	Performance Guarantee	Add the following new sub-clause: 6.2. The Guarantee shall be delivered within 14 days after receipt of the Acceptance document from the Employer.
		6.2.4 <i>As an alternative to a performance guarantee, the Contractor may deposit with the Employer a cash amount in a sum equal to the amount stated in the Data provided by Employer. All the provisions in respect of the guarantee apply mutatis mutandis to the cash deposit except that the amount deposited will be repaid to the Contractor within 30 (thirty) days after the issue of the Certificate or Certificates of Completion in respect of the whole of the permanent works.</i>
		6.2.5 <i>A minimum performance guarantee of 10% of the total project value shall govern.</i>
6.8	Contract Price Adjustment	Clause 6.8.2: <i>The value of the certificates issued shall be adjusted in accordance with the Contract Price Adjustment Schedule with the following values:</i> <i>Contract Price Adjustment Factor = (1 – x)</i>

CLAUSE / SUB-CLAUSE	DESCRIPTION	VARIATION / ADDITION
		$\left[\frac{aL_t}{L_o} + \frac{bP_t}{P_o} + \frac{cM_t}{M_o} + \frac{dF_t}{F_o} - 1 \right]$ rounded off to the fourth decimal place. Coefficients for calculating Contract price Adjustment Factor shall be: Value of x is 0.10 $a = 0.15$ $b = 0.20$ $c = 0.55$ $d = 0.10$ <i>L</i> is the "Labour Index" and shall be the "Consumer Price Index – for Polokwane Area" In Release P 0141.1 Table 21 The base month is: "the month prior to the closing of the Bid" No Contract price Adjustment will be done if contract period is less than 7 months. Clause 6.83: Price adjustments for variations in the costs of special materials are not allowed.
6.10.2	Valuation of Material brought onto site	Valuation of Material onto site Replace clause 6.10.2 with the following: The Employer shall not be responsible for any cost related to material on or delivered on site.
6.10.3	Retention Money	The percentage retention on the amounts due to the Contractor is 10 %, excluding contract price adjustment, contingencies and VAT, and limited to 10% of the contract amount, excluding contract price adjustment, contingencies and VAT. The retention will be reduced to 5% on completion of the project.
6.10.1.5	Payment of retention money	A Retention money guarantee will be not permitted.
7.8	Defects	7.8.1: The Defects Liability Period is 12 months measured from the date of the Certificate of Completion.
8.6	Insurances	Replace clause 8.6 with the following: 8.6 Insurances 8.6.1.1 The Employer's shall be exonerated from any insurance pertaining to contractors' plant, material or any other property belonging to the contractor (Tenderer). A minimum security of 10% of the total project value shall govern.

CLAUSE / SUB- CLAUSE	DESCRIPTION	VARIATION / ADDITION
		8.6.1.1.3 <i>The amount to cover professional fees for repairing damage and loss to be included in the insurance sum is NIL</i> 8.6.1.3 <i>The limit of indemnity for liability insurance required should not be less than the contract amount.</i> 8.6.1.2 Special risk insurance issued by SASRIA is required.

ETENDER

C1.2.2: PART B: CONTRACT DATA PROVIDED BY THE CONTRACTOR

The following contract specific data are applicable to this contract:

REFERENCE**CONTRACT SPECIFIC DATA BY THE CONTRACTOR**

Clause 1.1.9: **Name of Contractor:**

Clause 1.2.1: **Address of the Contractor:**
The Contractor's address for receipt of communication is:

Physical:

Postal:

.....

.....

.....

.....

.....

.....

E-Mail:

Telephone No: Fax No:

Clause 5.5 The works shall be completed within months (including special non-working days and the year-end break).

Clause 6.8.3: The variation in cost of all special materials is to be provided in the table SM 1 for special materials.
The rates and prices for the special materials shall be furnished by the Bider, which rates and prices shall not include VAT but shall include all other obligatory taxes and levies. **The quoted price is the ruling price on the Month prior to close of bid.**

TABLE: SM1

Special Materials*	Unit	Rate or Price for the base month
.....		
.....		
.....		
.....		
.....		

*Contractor to indicate the type, unit and rate of special material to be listed. The Contractor shall substantiate the above rates or prices with acceptable documentary evidence. Contractor to provide any other Special Materials if deemed necessary. Diesel, reinforcing steel, and cement will not be accepted as special material.

C1.3 Form of Guarantee - Pro Forma

Contract No

WHEREAS **The Ephraim Mogale Local Municipality** (hereinafter referred to as the Employer") entered into, a Contract with:

.....
 (Hereinafter called "the Contactor") on the day of 20.....
 for **CONSTRUCTION OF MATLEREKENG SPORT FACILITY** in the **Ephraim Mogale Local Municipality** of the Limpopo Province.

AND WHEREAS it is provided by such Contract that the Contractor shall provide the Employer with security by way of a guarantee for the due and faithful fulfillment of such Contract by the Contractor;

AND WHEREAS has / have at the request of the Contractor, agreed to give such guarantee;

NOW THEREFORE WE do hereby guarantee and bind ourselves jointly and severally as Guarantor and Co-principal Debtors to the Employer under renunciation of the benefits of division and execution for the due and faithful performance by the Contractor of all the terms and conditions of the said Contract, subject to the following conditions:

1. The Employer shall, without reference and / or notice to us, have complete liberty of action to act in any manner authorized and/or contemplated by the terms of the said Contract, and/or to agree to any modifications, variations, alterations, directions or extensions of the completion date of the works under the said Contract, and that its rights under this guarantee shall in no way be prejudiced nor our liability hereunder be affected by reason of any steps which the Employer may take under such Contract, or of any modification, variation, alterations of the completion date which the Employer may make, give, concede or agree to under the said Contract.
2. This guarantee shall be limited to the payment of a sum of money.
3. The Employer shall be entitled, without reference to us, to release any guarantee held by it, and to give time to or compound or make any other arrangement with the Contractor.
4. This guarantee shall remain in full force and effect until the issue of the Certificate of Completion in terms of the Contract, unless we are advised in writing by the Employer before the issue of the said Certificate of his intention to institute claims, and the particulars thereof, in which event this guarantee shall remain in full force and effect until all such claims have been paid or liquidated.
5. Our total liability hereunder shall not exceed the Guaranteed Sum of:

 Rand (in words);
 R..... (in figures)
6. The Guarantor reserves the right to withdraw from this guarantee by depositing the Guaranteed Sum with the beneficiary, whereupon our liability hereunder shall cease.
7. We hereby choose our address for the serving of all notices for all purposes arising here from as

.....
.....
.....

IN WITNESS WHEREOF this guarantee has been executed by us at
on this day of 20

Signature

Duly authorized to sign on behalf of

Address
.....
.....

As witnesses:

1

2

C1.4: Agreement with Adjudicator

This agreement is made on the.....day of 20.....between: the Employer
(name of company / organisation).....
of (address).....

.....and the
Contractor

(name of company / organisation)
of (address).....

..... (hereinafter
called **the Parties**)

and

(name).....
of (address)

.....
(hereinafter called **the Adjudicator**)

Disputes or differences may arise/have arisen* between the Parties under a Contract dated.....
and known as Contract No.....

(Contract title).....

and these disputes or differences shall be/have been* referred to adjudication in accordance with the
CIDB Adjudication Procedure, (hereinafter called "**the Procedure**") and the Adjudicator may be or has
been requested to act.

(* Delete as necessary)

IT IS NOW AGREED as follows:

1. The rights and obligations of the Adjudicator and the Parties shall be as set out in the Procedure.
2. The Adjudicator hereby accepts the appointment and agrees to conduct the adjudication in accordance with the Procedure.
3. The Parties bind themselves jointly and severally to pay the Adjudicator's fees and expenses in accordance with the Procedure as set out in the Contract Data.
4. The Parties and the Adjudicator shall at all times maintain the confidentiality of the adjudication and shall endeavour to ensure that anyone acting on their behalf or through them will do likewise, save with the consent of the other Parties which consent shall not be unreasonably refused.
5. The Adjudicator shall inform the Parties if he intends to destroy the documents which have been sent to him in relation to the adjudication and he shall retain documents for a further period at the request of either Party.

SIGNED by:

(Signature):

Name:

who warrants that he/ she is
duly authorised to sign for and
on behalf of the **First Party** in
the presence of

(Signature):

Name:

who warrants that he/ she is
duly authorised to sign for
and on behalf of the **Second
Party** in the presence of

(Signature):

Name:

the **Adjudicator** in the
presence of

Witness: (Signature).....	Witness: (Signature).....	Witness: (Signature).....
Name:	Name:	Name:
Address:	Address:	Address:
.....		
.....		
Date:	Date:	Date:

ETENDER

C1.5: Agreement In Terms Of Section 37(2) Of The Occupational Health And Safety Act No 85 Of 1993

THIS AGREEMENT is made between The EPHRAIM MOGALE Local Municipality represented by the Accounting Officer.

(hereinafter called the EMPLOYER of the one part, herein represented by:

.....
in his capacity as:
;

AND:

.....
(hereinafter called the CONTRACTOR) of the other part, herein represented by

.....
in his capacity as:

duly authorized to sign on behalf of the Contractor.

WHEREAS the CONTRACTOR is the Mandatory of the EMPLOYER in consequence of an agreement between the CONTRACTOR and the EMPLOYER in respect of

CONTRACT: Construction Of Matlerekeng Sport Facility in the Ephraim Mogale Local Municipality of the Limpopo Province

AND WHEREAS the EMPLOYER and the CONTRACTOR have agreed to enter into an agreement in terms of the provisions of Section 37(2) of the Occupational Health and Safety Act No 85 of 1993, as amended by OHS Act Amendment Act No 181/1993 (hereinafter referred to as the ACT);

NOW THEREFORE the parties agree as follows:

1. The CONTRACTOR undertakes to acquaint the appropriate officials and employees of the CONTRACTOR with all relevant provisions of the ACT and the regulations promulgated in terms thereof.
2. The CONTRACTOR undertakes to fully comply with all relevant duties, obligations and prohibitions imposed in terms of the ACT and Regulations: Provided that should the EMPLOYER have prescribed certain arrangements and procedures that same shall be observed and adhered to by the CONTRACTOR, his officials and employees. The CONTRACTOR shall bear the onus of acquainting himself/herself/itself with such arrangements and procedures.
3. The CONTRACTOR hereby accepts sole liability for such due compliance with the relevant duties, obligations, prohibitions, arrangements and procedures, if any, imposed by the ACT and Regulations, and the CONTRACTOR expressly absolves the EMPLOYER and the Employer's CONSULTING ENGINEERS from being obliged to comply with any of the aforesaid duties, obligations, prohibitions, arrangements and procedures in respect of the work included in the contract.
4. The CONTRACTOR agrees that any duly authorized officials of the EMPLOYER shall be entitled, although not obliged, to take such steps as may be necessary to ensure that the CONTRACTOR has complied with his undertakings as more fully set out in paragraphs 1 and 2 above, which steps may include, but shall not be limited to, the right to inspect any appropriate site or premises occupied by the CONTRACTOR, or to take such steps it may deem necessary

to remedy the default of the CONTRACTOR at the cost of the CONTRACTOR.

5. The CONTRACTOR shall be obliged to report forthwith to the EMPLOYER any investigation, complaint or criminal charge which may arise as a consequence of the provisions of the ACT and Regulations, pursuant to work performed in terms of this agreement, and shall, on written demand, provide full details in writing of such investigation, complaint or criminal charge.

Thus signed at for and on behalf of the **CONTRACTOR**

on this the day of 20.....

SIGNATURE:

.....

NAME

AND

SURNAME:

.....

CAPACITY:

.....

WITNESSES: 1.

2.

Thus signed at for and on behalf of the **EMPLOYER** on this

the day of 20.....

SIGNATURE:

.....

NAME

AND

SURNAME:

.....

CAPACITY:

.....

WITNESSES: 1.

2.

EPHRAIM MOGALE LOCAL MUNICIPALITY CONSTRUCTION OF MATLEREKENG SPORT FACILITY

C2.1: PRICING INSTRUCTIONS

1. GENERAL

The pricing instructions describe the criteria and assumptions which will be assumed in the Contract that the Bidder has taken into account when developing his prices. The Bills of Quantities record the Contractor's rates for providing supplies, services, engineering and construction works in accordance with the Scope of Work.

The terms of payment and the provisions for price adjustment, if applicable, are established in the Contract Data. These items are not described in the Pricing Data.

The Bidder's obligations in pricing the Bid offer and the Employer's undertakings in the checking and correction of arithmetical errors are dealt with in the Standard Conditions of Bid contained in Annexure F of SANS 294, as amended in and read in conjunction with the Bid Data.

2. DOCUMENTS MUTUALLY EXPLANATORY

The documents forming the Contract are to be taken as mutually explanatory of one another. The Bill of Quantities forms an integral part of the Contract Documents and shall be read in conjunction with the Bid Data, Contract Data, Scope of Work, Site Information General and Special Conditions of Contract, the Specifications and the Drawings.

3. DEFINITIONS

For the purpose of this Bill of Quantities, the following words shall have the meanings hereby assigned to them:

Unit	:	The unit of measurement for each item of work as defined in the pricing schedule and bill of quantities.
Quantity	:	The number of units of work for each item
Rate	:	The payment per unit of measurement at which the Bidder Bids to do the work.
Amount	:	The product of the quantity and the rate Bided for an item
Sum	:	An amount Bided for an item, the extent of which is described in the Schedule of Quantities, the specifications or elsewhere but the quantity of work of which is not measured in any units.
Prime Cost (or PC item)	:	A sum fixed by the Engineer and entered in the Schedule of Quantities as the net sum provided to cover the cost of specific goods or materials to be supplied under the contract, or the net sum to be paid by the Contractor to merchants or others for such articles or materials. ¹
Provisional Sum	:	A sum of money fixed by the Engineer and entered in the Schedule of Quantities to provide for work not defined at the Bid stage and includes any allowance specifically made for unforeseen contingencies. ¹
Extra Over (or EO)	:	Qualifies an operation (or combination of operations) which is common in a varying degree to a number of other operations and which is scheduled once as "extra over" those other operations in order to avoid a multiplicity of items each reflecting the degree to which the common operations applies. The term "extra over" invariably denoted double measurement, no deduction being made from one on account of the other. ¹

4. DESCRIPTIONS

Descriptions in the Bill of Quantities are abbreviated and comply generally with those in the Standardised Specifications. Clause 8 of each Standardised Specification, read together with the relevant clauses of the Scope of Work, set out what ancillary or associated activities are

included in the rates for the operations specified. Should any requirements of the measurement and payment clause of the applicable Standardised Specification, or the Scope of Work, conflict with the terms of the Bill, the requirements of the Standardised Specification or Scope of Work, as applicable, shall prevail.

5. **REFERENCES**

The general conditions of contract, the special conditions of contract (if any), the specifications (including the project specification) and the drawings are to be read in conjunction with the schedule of quantities.

Descriptions in the schedule of quantities are abbreviated and the schedule has been drawn up generally in accordance with the Scope of Works. Should any requirement of the measurement and payment clause of the applicable standardised specification², or the project specification², or the particular specification(s)² conflict with the terms of the schedule the requirement of the standardised, project or particular specification, as applicable, shall prevail.

Unless otherwise stated, items are measured net in accordance with the drawings, and no allowance has been made for waste.

The prices and rates to be inserted in the schedule of quantities are to be the full inclusive prices to the Employer for the work described under the several items, value added tax excluded. Such prices shall cover all costs and expenses that may be required in and for the construction of the work described, and shall cover the cost of all general risks, liabilities and obligations set forth or implied in the documents on which the quotation is based.

A price or rate is to be entered against each item in the schedule of quantities, whether the quantities are stated or not. An item against which no price is entered will be considered to be covered by the other prices or rates in the schedule

6. **UNITS OF MEASUREMENT**

The units of measurement indicated in the Bill of Quantities are metric units.

The following abbreviations are used in the Bill of Quantities:

%	=	per cent
h	=	hour
ha	=	hectare
kg	=	kilogram
kl	=	kilolitre
km	=	kilometre
km-pass	=	kilometre-pass
kW	=	kilowatt
l	=	litre
m	=	metre
mm	=	millimetre
MN	=	meganewton
MN-m	=	meganewton-metre
MPa	=	megapascal
kPa	=	kilopascal
m ²	=	square metre
m ³	=	cubic metre
m ³ -km	=	cubic metre-kilometre
m ² -pass	=	square metre-pass

no	=	number
PC sum	=	Prime Cost sum
Prov Sum	=	Provisional Sum
sum	=	lump sum
t	=	ton (1 000 kg)
R/only	=	Rate only
W/day	=	Work day

7. **NET MEASUREMENTS**

Unless otherwise stated, items are measured net in accordance with the drawings, and no allowance is made for off-cuts and waste.

8. **QUANTITIES**

The quantities set out in these Bills of Quantities are approximate and do not necessarily represent the actual amount of work to be done. The quantities of work accepted and certified for payment will be used for determining payments due and not the quantities given in the Bills of Quantities.

The Contract Amount to be determined in accordance with the conditions of contract identified in the Contract Data shall be computed from the actual quantities of authorized work done, value at rates determined in terms of the Contract Data, against the respective items in the Bill of Quantities.

9. **CURRENCY**

All rates and sums of money quoted in the Bill of Quantities shall be in Rand and whole cents. Fractions of a cent shall be discounted.

10. **VALUE ADDED TAX**

Value Added Tax shall be excluded from the rates and sums contracted for the various items of work included in the Bill of Quantities. VAT will be added as a single entry to the summary.

11. **RATES AND PRICES**

11.1 **General**

- a) The Contractor must price each item in the Bill of Quantities in BLACK INK. Reproduced computer printouts of the Bills of Quantities will not be acceptable.
- b) The rates and prices to be inserted in the Bill of Quantities shall cover all the services and incidentals for the work described under the several items. Such prices and rates shall cover all costs and expenses that may be required in and for the execution of the work described, and shall cover the cost of all general risks, liabilities and obligations set forth or implied in the documents on which the Bid is based, as well as overhead charges and profit. Reasonable prices shall be inserted as these will be used as a basis for assessment of payment for additional work that may have to be carried out.
- c) Where the Contractor is required to furnish detailed drawings and designs or other information in terms of the Contract Data, all costs thereof shall be deemed to have been provided for and included in the unit rates and sum amounts contracted for the

items scheduled in the Bill of Quantities. Separate additional payments will not be made.

- d) A price or rate is to be entered against each item in the Bill of Quantities, whether the quantities are stated or not. An item against which no price is entered will be considered to be covered by the other prices or rates in the Bill. The Contractor will not be paid for items against which no rate or lump sum has been entered in the Bill of Quantities.
- e) Should the Contractor group a number of items and contract one lump sum for such group of items, this single lump sum shall apply to that group of items and not to each individual item.
- f) Should the Contractor indicate against any item that compensation for such item is included in another item; the rate for the item included in another item shall be deemed nil.
- g) A submission may be regarded as non-responsive if any rates or lump sums in the Bill of Quantities are, in the opinion of the Employer, unreasonable or out of proportion.

11.2 "Rate only" items

The Contractor shall fill in a rate (in the rate column) against all items where the words "rate only" appear in the Amount column, which rate will constitute payment for work which may be done in terms of this item. Such "rate-only" items are used where it is estimated that little or no work will be required under the item or where the item is to be considered as an alternative to another item for which a quantity is given.

11.3 Arithmetic

Excepting where Sum Amounts are required or where Provisional Sums have been indicated, the Contractor shall enter an applicable rate in the Rate Column of the Bill of Quantities for each scheduled item. He shall also enter an appropriate sum in the Amount column for each scheduled item, by determining in the applicable line item the product of the Quantity and the Unit Rate.

If there is an error in the line item resulting from the product of the unit rate and the quantity, the rate shall be binding and the error of extension as entered in the Bid offer will be corrected by the Employer in determining the Contract Price.

Where there is an error in addition, either as a result of other corrections required by this checking process or in the Bidder's addition of prices, such error will be corrected by the Employer in determining the Contract Price.

12. VARIATION IN TEXT

No alteration, erasure or addition is to be made in the text of the Bill of Quantities. Should any alteration, erasure or addition be made, it will not be recognized; the original wording of the Bill of Quantities will be adhered to.

PART C2.2

BILL OF QUANTITIES

TENDER NO: EPMLM/8/3/515

CONSTRUCTION OF MATLEREKENG SPORT FACILITY

E TENDER

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
1	SABS1200 A	<u>SCHEDULE 1 : PRELIMINARY & GENERAL</u>				
	1.1	FIXED-CHARGES AND VALUE RELATED ITEMS				
1.1	1.1.1	Contractual Requirements	Sum	1		
	1.1.2	Establishment of Facilities on Site				
	1.1.2.1	Facilities for the Engineer	sum	1		
1.2	PSAB 1.1.3	Survey Equipment	Sum	1		
1.3	1200AB	Name Boards (1No.)	Sum	1		
1.4	PSAB 1.1.4	Offices (Type 1)	Sum	1		
1.5	PSAB 1.1.5	Carports	Sum	1		
	1.1.5.1	Facilities for the Contractor				
1.6	1.1.5.2	Offices, storage sheds and fencing (PSA-4.2)	Sum	1		
1.7	1.1.5.3	Portable Latrines (PSA-8.3)	No.	2		
1.8	1.1.5.4	Tools and Equipment	Sum	1		
1.9	1.1.5.5	Water Supply, Electric Power and Communications	Sum	1		
1.10	1.1.5.6	Access	Sum	1		
1.11	1.1.5.7	Other Fixed-charge Obligations	Sum	1		
1.12	1.1.5.8	Removal of Site Establishment	Sum	1		
	1.6	TIME-RELATED ITEMS				
1.13	1.6.1	Contractual Requirements	Sum	1		
1.14	1.6.2	Operation and Maintain of Facilities on site for the Duration of the Construction				
	1.6.2.1	Facilities for the Engineer				
1.15	PSAB 1.6.3	Survey Equipment	Sum	1		
1.16	1200AB	Name Boards	Sum	1		
1.17	PSAB 1.6.4	Offices	Sum	1		
1.18	PSAB 1.6.5	Carports	Sum	1		
1.19	PSAB 1.6.6	Survey Assistant (Approx. 4 hours/week)	hours	100		
	SABS 1200A					
	1.6.6.1	Facilities for Contractor				
	1.6.6.2	Offices and storage sheds	Sum	1		
1.20	1.6.6.3	Portable latrines	No.	2		
1.21	1.6.6.4	Tools and equipment	Sum	1		
1.22	1.6.6.5	Water supplies, electric power and communications	Sum	1		
1.23	1.6.6.6	Access	Sum	1		
1.24	1.6.6.7	Supervision for Duration of Construction	Months	9		R/Only
		Total Carried Forward				R

**MATLEREKENG SPORT COMPLEX
QUANTITIES****SCHEDULE OF**

Item No.	Payment Refers	Description	Unit	Qty	Qty	
					Rate	Amount
		Total Brought Forward				R
1.25	1.6.6.8	Company and Head Office Overhead Costs for the Duration of the Construction	Sum	1		
1.26	1.6.6.9	Survey "as-built" position and levels of all new and existing pipelines	Sum	1		
1.27	1.6.6.10	Other Time-related Obligations	Sum	1		
	PSA 1.7.1	PROVISIONAL AMOUNTS BY ENGINEER				
1.28	1.7.1.1	Independent testing specified by the Engineer	P. Sum	1	R 50 000,00	R 50 000,00
1.29	1.7.1.2	Overheads, Charges and Profit on Item 1.7.1.1 above	%			
1.30	PSA 1.8	Provision for training.	P. Sum	1	R 35 000,00	R 35 000,00
1.31	1.8.1	Overheads, Charges and Profit on Item 1.8 above	%			
1.32	PSA 1.9	Provision for electricity & electrical works.	P. Sum	1	R 150 000,00	R 150 000,00
1.33	1.9.1	Overheads, Charges and Profit on Item 1.9 above	%			
1.34	PSA 1.10	Provision for soccer/rugby field kikuyu grass	P. Sum	1	R 455 000,00	R/Only
1.35	1.10.1	Overheads, Charges and Profit on Item 1.10 above	%			
1.36	PSA 1.11	Provision for athletics track final surfacing.	P. Sum	1	R 39 000,00	R 39 000,00
1.37	1.11.1	Overheads, Charges and Profit on Item 1.11 above	%			
1.38	PSA 1.12	Provision for combi-courts final surfacing.	P. Sum	1	R 350 000,00	R/Only
1.39	1.12.1	Overheads, Charges and Profit on Item 1.12 above	%			
1.40	PSA 1.13	Provision for signage.	P. Sum	1	R 50 000,00	R/Only
1.41	1.13.1	Overheads, Charges and Profit on Item 1.13 above	%			
1.42	PSA 1.14	Provision for student subsistence, travel & allowance.	P. Sum	1	R 35 000,00	R 35 000,00
1.43	1.14.1	Overheads, Charges and Profit on Item 1.14 above	%			
1.44	PSA 1.15	Provision for PSC meetings (maximum 6 persons – R200 per person/meeting.	P. Sum	1	R 7 200,00	R 7 200,00
1.45	1.15.1	Overheads, Charges and Profit on Item 1.15 above	%			
1.46	PSA 1.16	Provision for community liaison officer	P. Sum	1	R 60 000,00	R 60 000,00
1.47	1.16.1	Overheads, Charges and Profit on Item 1.16 above	%			
1.48						
1.49						
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX SCHEDULE OF QUANTITIES

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	1.17	DAYWORKS				
1.50	1.17.1	Materials	P. Sum	1	R 90 000,00	R 90 000,00
1.51	1.17.1.1	Overheads, Charges and Profit on Item 1.17.1	%			
	1.17.2.1	Labour				
1.52	1.17.2.2	Skilled	hr	40		
1.53	1.17.2.3	Semi-skilled	hr	40		
1.54	1.17.2.4	General Labour	hr	40		
	1.17.3.1	Plant and Equipment				
1.55	1.17.3.2	Crawler excavator (70 - 80 kW)	hr	16		
1.56	1.17.3.3	Backhoe loader (50 - 60 kW)	hr	16		
1.57	1.17.3.4	Walk-behind vibrating roller	hr	16		
1.58	1.17.3.5	Compressor (175 cfm), including hoses and breakers	hr	16		
1.59	1.17.3.6	Concrete Mixer (150 - 250 litre)	hr	16		
1.60	1.17.3.7	Water Pump (75 mm), including suction and delivery hoses	hr	16		
1.61	1.17.3.8	Tipper trucks (6 m ³)	hr	16		
1.62	1.17.3.9	1 ton bakkie	hr	16		
1.63	1.17.3.10	Plate compactor	hr	16		
1.64	1.17.3.11	220 Volt generator	hr	16		
	1.18	TEMPORARY WORKS				
1.65	1.18.1	Deal with traffic and maintain access road to reservoir site	Sum	1		
	1.19	HEALTH & SAFETY				
		Compliance with the Occupational Health and Safety Act (Act 85 of 1993) and applicable regulations (Construction Regulations, 2003), and the Employers Health & Safety Specification bound into this document:				
1.66	1.19.1	Preparation of a Health and Safety Plan	L/Sum	1	R 10 000,00	R 10 000,00
1.67	1.19.2	Provision of a Health and Safety file	L/Sum	1	R 10 000,00	R 10 000,00
1.68	1.19.3	Provision of construction supervisors & Audit	L/Sum	1	R 180 000,00	R 180 000,00
1.69	1.19.4	Provision of a safety officer (full-time)	L/Sum	1	R 60 000,00	R 60 000,00
1.70	1.19.5	Health and Safety training	L/Sum	1	R 45 000,00	R 45 000,00
1.71	1.19.6	Provision of personal protective clothing and equipment (Contractors staff)	L/Sum	1	R 40 000,00	R 40 000,00
1.72	1.19.7	Provision of safety fences, signs and barricades	L/Sum	1	R 15 000,00	R 15 000,00
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX

SCHEDULE OF QUANTITIES

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		SCHEDULE 2 : SITE PREPARATION, TERRACING, PAVING AND LANDSCAPING				
2.1	SABS 1200C	SITE CLEARANCE Clear and grub and dispose material	ha	8,84		
	SABS 1200D	EARTHWORKS.				
2.2	2.1	Remove topsoil to nominal depth of 150mm, stockpile and maintain(road)	m ²	1000		
		BULK EXCAVATION				
	2.1.1	EXCAVATE IN ALL MATERIALS AND USE FOR EMBANKMENT, BACKFILL to 95% MOD AASHTO DISPOSE WITHIN 1,5 km				
2.3	2.1.1.1	Cut to fill for forming terraces	m ³	—		
2.4	2.1.1.2	Cut to stockpile for forming terraces	m ³	—		
2.5	2.1.1.3	Stockpile to fill for forming terraces	m ³	1015		
2.6	2.1.1.4	Cut to spoil	m ³	—		
	2.1.2	Importation of G5 material from:				
2.7	2.1.2.1	a) Commercial sources	m ³	550		
2.8	2.1.2.2	b) From borrow pits within 5km	m ³	—		
	2.1.3	EXTRA OVER ITEMS 2.2.1 TO 2.2.5 FOR EXCAVATIONS IN				
2.9	2.1.3.1	Intermediate material	m ³	500		
2.10	2.1.3.2	Hard rock material	m ³	150		
	SABS 1200DM	LAYERWORKS				
2.11	2.1.4	Rip and re-compact 150mm in-situ material to 93% mod. AASHTO(road)	m ³	150		
2.12	2.1.5	150mm G5 layer (from commercial sources) as per Table 13 of TRH4 compacted to 95% mod	m ³	150		
2.13	2.1.6	AASHTO(Entrance road) G6 layer (from commercial sources) as per Table 13 of TRH4 compacted to 93% mod AASHTO between dump rock layer and G6 layer	m ³	—		
2.14	2.1.7	500mm dump rock (from commercial sources) pioneer layer compacted by 11 passes of a heavy vibratory roller	m ³	—		
2.15		Supply and lay Grade A4 Bidim between rock layer and G6 layer	m ²	—		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total brought forward				R
2.16	2.2 2.2.1 2.2.1.1	<u>Trench Excavation</u> Excavate in all materials for trenches: Trench Widths not Exceeding 1000mm and up to depth of 1.2m(Only around the field)	m	500		R/Only
2.17	2.3 2.3.1	<u>Supply and install subsurface drains complete. Refer to SARS Norms and Standards Vol 2:</u> 110mm dia HDPE Drainex subsoil drain complete,	m	500		R/Only
2.18	2.3.2	Sub-Surface drains to be lined with A6 Bidim geotextile (or similar approved)	m ²	1700		R/Only
2.19	2.3.3	19mm crusher stone	m ³	50		R/Only
2.20	2.3.4	100mm Layer of Crusher run	m ³	50		R/Only
2.21	2.3.5	25mm Course river sand	m ³	50		R/Only
2.22	2.3.6	Layer of stockpiled material (Weed free) to be spread evenly. Compacted lightly to be consistent with the rest of the field	m ³	50		R/Only
	PSVA	LANDSCAPING AND GRASSING				
	2.4	TRIMMING				
2.23	2.4.1	Machine trimming	m ²	23500		
2.24	2.4.2	Hand trimming	m ²	—		
	2.5	PREPARING AREAS FOR GRASSING AND GROUND COVERS				
2.25	2.5.1	Scarifying	m ²	23500		R/Only
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total brought forward				R
	2.6	TOPSOILING ON THE SITE WITH				
2.26	2.6.1	Topsoil obtained from the stockpile or from borrow areas on the site	m ³	—		R/Only
2.27	2.6.2	Topsoil obtained by the Contractor from other sources(Import, spread and level 100mm thick layer of weed free top soil(Soccer field) will be covered under soccer/rugby field & athletic track	m ³	2350		R/Only
	2.6.3	Cover grass with 15mm layer of sieved top soil and smooth (will be covered under soccer/rugby field & athletic track)	m ³	352,5		R/Only
	2.7	SUPPLYING AND APPYING CHEMICAL FERTILIZER				
2.28	2.7.1	2 : 3 : 2 fertilizer	t	2		R/Only
	2.8	GRASSING				
2.29	2.8.1	Eragrostis curvula (seed)	m ²	—		
2.30	2.8.2	Kikuyu (cuttings) - will be covered under soccer/rugby field & athletic track	m ²	23500		R/Only
	SABS 1200MK	KERBING AND CHANNELLING				
	2.9	CONCRETE KERBING AND CHANNELLING FIG.10				
2.31	2.9.1	(a) Type half battered on curves	m	—		
2.32	2.9.2	(b) Type half battered on straight sections	m	500		R/Only
	SABS 1200MJ	SEGMENTED PAVING AROUND STRUCTURES (PROVISIONAL ITEM)				
	2.10	CONSTRUCTION OF PAVING WITH 80mm THK CONCRETE BLOCKS INCLUDING 25mm SANDBED COMPLETE				
2.33	2.10.1	Horizontal (including trimming/excavations)	m ²	1000		R/Only
2.34	2.10.2	Extra over Item 2.6.1 for provision and installation of edge restraints consisting of kerbing as per SABS 927 Fig.12	m	300		R/Only
	2.11	CUTTING UNITS TO FIT EDGE RESTRAINTS				
2.35	2.11.1	Straight	m	50		R/Only
2.36	2.11.2	Raking	m	300		R/Only
	2.12	RETAINING WALL				
2.37	2.12.1	Supply & install Interlocking retaining blocks (Terraforce L11 or similar)	m ²	—		R/Only
		TOTAL CARRIED FORWARD TO SUMMARY				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		SCHEDULE 3 : FOUNDATIONS				
	SABS 1200D	EARTHWORKS				
	PSD 3.1	RESTRICTED EXCAVATIONS				
	3.1.1	EXCAVATE FOR FOUNDATIONS AND STRUCTURES IN ALL MATERIALS AND BACKFILL BEHIND STRUCTURES TO 93% MOD. AASHTO OR DISPOSE OF SURPLUS MATERIAL WITHIN 1,5km				
3.1	3.1.1.1	0m up to 2m	m ³	—		
3.2	3.1.1.2	Extra over Item 3.1.1 for additional excavations required by the Engineer after the excavations has been completed	m ³	—		
	3.2	CONCRETE STRUCTURE				
	SABS 1200 GB	SECTION : FOUNDATIONS				
		FORMWORK				
3.3	3.2.1	Normal formwork to				
	3.2.1.1	a) Walls b) Beam sides c) Soffits of beams d) Suspended floors	m ²	—		
	3.3	REINFORCEMENT				
3.4	3.3.1	Mild steel bars of nominal diameter				
	3.3.1.1	8mm Links	t	—		
	3.3.2	High-tensile steel bars of nominal diameter				
3.5	3.3.2.1	12mm	t	—		
3.6	3.3.2.2	16mm	t	—		
3.7	3.3.2.3	20mm	t	—		
	3.3.3	High-tensile welded mesh of nominal mass				
3.8	3.3.3.1	a)5.00kg/m2	m ²	—		
	3.4	CONCRETE				
3.9	3.4.1	Prescribed mix 25 concrete with 19 mm aggregate in footings	m ³	—		
3.10	3.4.2	Blinding layer, Grade 20/19,0 mm concrete under basement floor	m ²	—		
	3.4.3	Strength concrete, Grade 25/19,0 mm in:				
3.11	3.4.3.1	a) Stub columns	m ³	—		
3.12	3.4.3.2	b) Apron slabs, with joints	m ³	—		
3.13	3.4.3.3	c) Surface bed, with joints	m ³	—		
3.14	3.4.3.4	Unformed surface finishes	m ²	—		
3.15	3.4.3.5	Wood float to all floors	m ²	—		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		<u>SCHEDULE 4: STRUCTURAL STEELWORK</u>				
	SABS 1200 H	SUPPLY AND FABRICATION				
4.1	4.1	Preparation of shop detail drawings	t	—		
	4.1.1	Supply and fabrication of steelwork complete with all the necessary cleats, brackets, gussets, packs, etc., with paint/ coating specification				
		b) Using steel to SABS 1431				
4.2	4.1.1.1	Angle and channel vertical bracing	t	—		
4.3	4.1.1.2	Portal frames made up from columns and roof rafters with welded haunches,	t	—		
4.4	4.1.1.3	Cold rolled purlins	t	—		
4.5	4.1.1.4	Angle rafter bracing	t	—		
4.6	4.1.1.5	Angle sag-ties	t	—		
4.7	4.1.1.6	C.H.S eaves ties	t	—		
4.8	4.1.1.7	Angle knee bracing	t	—		
	4.2	DELIVERY				
	4.2.1	Delivery of steelwork included under items 4.1 to 4.8 inclusive				
4.9	4.2.1.1	a) Normal loads	t	—		
	4.3	ERECTION				
4.10	4.3.1	Offloading, stacking on Site, and erection of steelwork included under items .4.1 to 4.10	t	—		
	4.4	ERECTION BOLTS AND NUTS				
	4.4.1	Supply, deliver to Site and store as follows:				
4.11	4.4.4.1	Grade 8.8 bolts including thru' hardened flat or tapered washers, as appropriate	t	—		
	4.5	GROUTING				
4.12	4.5.1	Supply and Install non-shrink grout to underneath column base plates	m ³	—		
		TOTAL CARRIED FORWARD TO SUMMARY				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		SCHEDULE 5: BUILDING WORKS: SOCCER/RUGBY FIELD(CHANG ROOMS)				
		The Tenderer is referred to the relevant Clauses in the separate document Model Preambles for Trades (2008 Edition) and the Supplementary Preambles hereunder. EARTHWORKS (PROVISIONAL):				
	5.1	EXCAVATIONS:				
	5.1.1	Excavation in compacted earth filling material not exceeding 2m deep				
5.1	5.1.1.1	Trenches, holes and thickening under surface beds etc.	m ³	40		
	5.1.2	Extra over excavation in earth for excavation in				
5.2	5.1.2.1	Soft rock	m ³	40		
5.3	5.1.2.2	Hard rock	m ³	—		
	5.1.3	Extra over all excavations for carting away				
5.4	5.1.3.1	Surplus material from excavations and/or stock piles on site to a dumping site to be located by the contractor	m ³	14		
	5.1.4	Risk of collapse of excavations				
5.5	5.1.4.1	Sides of trench and hole excavations not exceeding 1,5m deep	m ²	—		
5.6	5.1.4.2	Keeping excavations free of water	Sum	1		
	5.2	FILLING ETC				
	5.2.1	Earth filling obtained from the excavations and/or prescribed stock piles on site, compacted to 97% Mod AASHTO density				
5.7	5.2.1.1	Backfilling to trenches, holes, etc	m ³	18		
	5.2.2	Approved G5 filling material supplied by the contractor compacted to 93% Mod AASHTO density in layers not exceeding 150mm thick				
5.8	5.2.2.1	Under floors	m ³	21,5		
	5.2.3	River sand filling supplied by the contractor:				
5.9	5.2.3.1	25mm Thick dry, clean, washed riversand layer evenly spread over filling (elsewhere), levelled, watered and rammed to receive waterproof membrane (elsewhere) under solid floors.	m ²	146		
	5.2.4	Compaction of surfaces				
5.10	5.2.4.1	Compaction of ground surfaces under floors, trenches, etc including scarifying for a depth of 150mm, breaking down oversize material, adding suitable material where necessary and compacting to 90% Mod.AASHTO density	m ²	146		
	5.2.5	Soil insecticide				
5.11	5.2.5.1	Under floors etc including forming and poisoning shallow furrows against foundation walls etc, filling in furrows and ramming	m ²	156		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
5.12	5.2.5.2	To bottoms and sides of trenches etc	m ²	94,6		
	5.3	CONCRETE, FORMWORK AND REINFORCEMENT:				
	5.3.2	UNREINFORCED CONCRETE				
		25MPa/19mm concrete				
5.13	5.3.2.1	Ramps	m ³	4,5		
5.14	5.3.2.2	Steps, urinal steps, etc.	m ³	3		
	5.3.3	REINFORCED CONCRETE				
		25MPa/19mm concrete				
5.15	5.3.3.1	Strip footings	m ³	26		
5.16	5.3.3.2	In surface beds cast over waterproofing membrane (elsewhere).	m ³	15		
	5.3.4	TEST BLOCKS				
5.17	5.3.4.1	Making and testing 150 x 150 x 150mm concrete strength test cube (Provisional)	No	12		
	5.3.5	CONCRETE SUNDRIES				
		Finishing top surfaces of concrete smooth with a wood float				
5.18	5.3.5.1	Surface beds, slabs, etc	m ²	146		
	5.3.6	ROUGH FORMWORK:				
		Formwork to sides of:				
5.19	5.3.6.1	Edges, risers, ends and reveals not exceeding 300mm high or wide.	m	5		
	5.3.7	MOVEMENT JOINTS:				
5.20	5.3.7.1	10mm Isolation Joints not exceeding 300mm high	m	80		
5.21	5.3.7.2	10 x 12mm polysulphide sealant	m	80		
	5.3.8	REINFORCEMENT (PROVISIONAL)				
		Mild yield deformed type II steel reinforcement to concrete as described including all bending, hooked ends, binding wire and temporary supports				
5.22	5.3.8.1	Steel bar reinforcement in various sizes	t	1,5		
		High yield deformed type II steel reinforcement to concrete as described including all bending, hooked ends, binding wire and temporary supports				
5.23	5.3.8.2	Steel bar reinforcement in various sizes	t	1,5		
		Fabric reinforcement				
5.24	5.3.8.3	Type Ref 193 fabric reinforcement in concrete surface beds, slabs, etc	m ²	146		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	5.4	MASONRY:				
	5.4.1	FOUNDATIONS (PROVISIONAL):				
5.25	5.4.1.1	Brickwork in extra hard burnt clay bricks (15 MPa nominal compressive strength) in class I mortar in loadbearing walls, etc.: One brick wall	m ²	60		
5.26	5.4.2	BRICK REINFORCEMENT:				
	5.4.2.1	Brick reinforcement 150mm wide built into brick walls with sufficient laps at end joints, angles and intersections (measured nett).	m	656		
5.27	5.4.3	FACE BRICKWORK				
	5.4.3.1	Face brick pointed with square recessed horizontal and vertical joints: Extra over brickwork for face brickwork in foundations	m ²	10		
5.28	5.4.4	SUPERSTRUCTURE:				
	5.4.4.1	Brickwork of NFP bricks in class II mortar:				
	5.4.4.1	Half brick wall.	m ²	128		
5.29	5.4.4.2	Half brick wall in beamfilling.	m ²	25		
5.30	5.4.4.3	One brick wall.	m ²	307		
	5.4.5	BRICKWORK SUNDRIES				
		Movement Joints				
5.31	5.4.5.1	10mm 'Jointex' expansion joint built in vertically between brick walls	m ²	4		
5.32	5.4.5.2	Movement joint formed of 20mm softboard built in vertically between brick wall and concrete	m	110		
		Brickwork Reinforcement				
5.33	5.4.5.3	Brick reinforcement 75mm wide built into brick walls with sufficient laps at end joints, angles and intersections (measured nett).	m	492		
5.34	5.4.5.4	Brick reinforcement 150mm wide built into brick walls with sufficient laps at end joints, angles and intersections (measured nett).	m	950		
5.35	5.4.5.5	Pre-stressed fabricated lintels 220 x 75mm Lintels in lengths not exceeding 3m	m	45		
	5.4.5.6	110 x 75mm Lintels in lengths not exceeding 3m	m	15		
5.36	5.4.5.7	Turning pieces 220mm Wide turning piece to lintels etc	m	—		
5.37	5.4.5.8	Galvanised wire ties, etc 2,5mm plain galvanised wire bent twisted and tied through every third brick on edge lintels	No	3		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
5.38	5.4.5.9	Galvanised hoop iron cramps, ties, etc 30 x 1,6mm Wall tie 500mm girth with V-drip in centre built into brickwork across expansion joint	No	6		
5.39	5.4.6 5.4.6.1	AIR BRICKS: 222 x 155mm Terra-cotta vermin proof air bricks with gauze backing and building into opening in brickwork in cement mortar.	No	16		
5.40	5.4.7 5.4.7.1	FACED BRICKWORK: Face brick/ Morroco Travertine FBA pointed with square recessed horizontal and vertical joints: Extra over ordinary brickwork for facing and pointing in stretcher bond to piers.	m ²	7		
5.41	5.4.7.2	Extra over brickwork in beamfilling for face brickwork.	m ²	15		
5.42	5.4.7.3	Extra over brickwork for brick-on-flat header course lintel.	m	20		
5.43	5.4.7.4	Cut face brick soldier course external window sill in cement mortar, 190mm high set flat and pointing on top and front edge including fair and fitted ends.	m	35		
5.44	5.4.7.5	Brick-on-edge header course copings, sills, etc. of face bricks(PC R5,000/1 000) pointed with recessed joints on all exposed faces:	m	—		
5.45	5.4.7.6	Cut face brick-on-edge external window sill, 110mm wide set sloping in cement mortar and pointing on top and front edge including all necessary fair raking cutting to facings under and fair and fitted ends.	m	—		
	5.5	WATERPROOFING:				
	5.5.1	DAMP-PROOFING OF WALLS AND FLOORS One layer of 375 micron embossed damp proof course				
5.46	5.5.1.1	On foundation walls	m ²	25		
5.47	5.5.1.2	On walls, stepped up in cavities, under sills, around door frames etc.	m ²	—		
	5.5.2	WATERPROOFING UNDER FLOORS, ETC.: One layer of 250 micron waterproof sheeting sealed at laps with approved tape Under surface beds				
5.48	5.5.2.1		m ²	146		
	5.5.2.3	JOINT SEALANTS ETC				
5.49	5.5.2.4	In joints between worktops and sanitary fittings, etc	m	—		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	5.6	ROOF COVERINGS, ETC.:				
		Chromadeck roofing sheets				
5.50	5.6.1	Roof covering with pitch not exceeding 25 degrees, in transportable lengths not exceeding 20m fixed to timber purlins.	m ²	156		
5.51	5.6.2	0,60mm Standard sheet iron ridge covering fixed to timber purlins (elsewhere).	m	48		
5.52	5.6.3	0,60mm sheet iron gable trim 370mm girth three times bent to detail and fixed to roof sheeting (elsewhere)	m	—		
5.53	5.6.4	Rolled edge at verge.	m	—		
	5.7	ROOF AND WALL INSULATION				
5.54	5.7.1	Fibreglass reinforced aluminium foil faced resin bonded glass fibre flexible building insulation 50mm Insulation laid taut over purlins and fixed concurrent with roof covering including galvanised steel straining wires	m ²	156		
	5.8	CARPENTRY AND JOINERY:				
	5.8.1	ROOF CONSTRUCTION:				
5.55	5.8.1.1	Roof construction including trusses, permanent bracing wall plates, purlins, etc.as per engineer drawings	No	1		
	5.9	WOOD PRESERVATIVE:				
5.56	5.9.1	Two coats creosote on sawn and wrought timbers.	m ²	6		
	5.10	FASCIAS AND BARGE BOARDS:				
		Tempered fibre cement:				
5.57	5.10.1	15 x 225mm Fascia or barge board countersunk screwed to support and roof timbers (elsewhere) with one brass screw at maximum 750mm centres and jointed with and including standard aluminium half round cover strips at all joints.	m	75		
	5.11	DOORS:				
		Wrought Meranti:				
5.58	5.11.1	40 x 813 x 2 032mm Framed, ledged and braced batten door formed of 40 x 110mm styles and top rail, 20 x 225mm bottom ledge, 20 x 115mm middle ledge and 20 x 110mm diagonal braces, filled in flush one side with 20 x 75mm tongued, grooved and V-jointed both sides vertical boarding fixed in and including grooves in styles and top rail. (D1)	No	5		
5.59	5.11.2	40 x 900 x 2 032mm Framed, ledged and braced batten door formed of 40 x 110mm styles and top rail, 20 x 225mm bottom ledge, 20 x 115mm middle ledge and 20 x 110mm diagonal braces, filled in flush one side with 20 x 75mm tongued, grooved and V-jointed both sides vertical boarding fixed in and including grooves in styles and top rail. (D2)	No	—		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
5.60	5.11.3	Semi-solid flush panel masonite doors: 40 x 813 x 2032mm Door.	No	11		
5.61	5.11.4	Built in cabinets measuring with sides, bottom, divisions, shelf, back and 2 single hinged doors as per Architects drawings	No	—		
	5.12	CEILINGS, PARTITIONS AND ACCESS FLOORING:				
	5.12.1	NAILED UP CEILINGS				
5.62	5.12.1.1	6.4mm "Rhino" gypsum plasterboard with 4mm x 45mm gypsum ceiling jointing strips Ceilings including 38 x 38mm sawn softwood branderling at 600mm centres	m ²	130		
5.63	5.12.1.2	Extra over ceiling for hinged pressed metal trap door size 600 x 600mm including all necessary ironmongery.	No	2		
	5.13	CORNICES				
5.64	5.13.1	Rhino gypsum plasterboard cornices 75mm Coved cornices	m	155		
	5.14	IRONMONGERY:				
	5.14.1	LOCKS:				
5.65	5.14.1.1	63mm Brass five pin tumbler padlock with two keys.	No	—		
5.66	5.14.1.2	SC "Union CZ 682/2277-103" three lever lockset with striking plate fixed to metal.	No	16		
5.67	5.14.1.3	SC "Union Code 37615" facility indicator bolt.	No	9		
5.68	5.14.1.4	Door closer in Design Hardware Status 983 with delay for paraplegics	No	—		
	5.14	LETTERS, NAMEPLATES, ETC. (PROVISIONAL):				
5.69	5.14.1	Union AL 8021 plate with male or female symbol.	No	8		
5.70	5.14.2	Union AL 8021 plate with paraplegic symbol.	No	—		
	5.14.3	Standard anodised aluminium plate with fire exit, fire extinguisher, fire hose reel or fire hydrant symbol	No	3		
	5.15	SUNDRIES:				
5.71	5.15.1	38mm Diameter red rubber door stop plugged to wall or floor.	No	16		
	5.16	BATHROOM FITTINGS:				
		Conways:				
5.72	5.16.1	CH "B 1682" thiefproof toilet roll holder. Sanitech	No	9		
5.73	5.16.2	Sanicare 1 Litre Top Up Liquid Soap Dispenser (Stainless Steel)	No	6		
5.74	5.16.3	Sanitech Roll Control paper towel dispenser (Stainless Steel).	No	6		
5.75	5.16.4	Sanicare Manual fem Bins.	No	6		
		Total Carried Forward				R

MATLEREHENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
5.76	5.16.5	Stainless steel: Stainless steel wall-mounted rear grab rail around the cistern as Chairman industries (code SR 2)	No	—		
5.77	5.16.6	Stainless steel wall-mounted side grab rail as Chairman industries (code DL 12)	No	—		
	5.17	PUSH PLATES AND KICKING PLATES Union or similar and approved				
5.78	5.17.1	Union kick plate.	No	—		
5.79	5.17.2	Pull handle for paraplegic doors.	No	—		
	5.18	METALWORK:				
	5.18.1	SECURITY GATES: Steel security grille gates formed of 30 x 50mm rectangular tubing for outer frame including two centre rails with an "Ultra" lock and filled in with 16mm x 16mm solid square bar at 100mm centres, screens, etc. installed complete including all subframes, bolts, expansion bolts, etc.:				
5.80	5.18.1.1	Steel fixed security grille gate size 900 x 2 100mm	No	5		
	5.19	PRESSED STEEL DOOR FRAMES: 1,2mm Double rebated pressed steel door frames suitable for half brick walls:				
5.81	5.19.1	Frame for door size 813 x 1,960mm with two 100mm steel butts - hinge pins to be welded - both legs of frame shortened.	No	11		
		1,2mm Double rebated pressed steel door frames suitable for one brick walls:				
5.82	5.19.1	Frame for door size 813 x 2 032mm with two 100mm steel butts - hinge pins to be welded	No	5		
5.83	5.19.2	Frame for door size 900 x 2 032mm with two 100mm steel butts - hinge pins to be welded	No	—		
	5.20	STEEL WINDOWS: Standard residential windows with burglar proofing and 3 x 30mm mild steel flat section welded to inside sash at the top of the window frame:				
5.84	5.20.1	Window type NE1, 530 x 650mm high.	No	9		
5.85	5.20.2	Window type NC5F, 530 x 950mm high.	No	5		
5.86	5.20.3	Window type NC3, 1500 x 949mm high.	No	5		
5.87						
	5.21	PLASTERING:				
	5.21.1	SCREEDS Screeds on concrete:				
5.88	5.21.1.1	25mm Thick on floors and landings.	m ²	156		
	5.22	INTERNAL PLASTER: ONE COAT (4:1) CEMENT PLASTER FINISHED TO A SMOOTH AND EVEN STEEL TROWELLED SURFACE:				
		On brickwork:				
	5.22.1	On walls.	m ²	495		
	5.22.2	On narrow widths.	m ²	10		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	5.23	TILING:				
	5.23.1	WALL TILING: 200 x200mm White glazed ceramic tiles fixed with adhesive to plaster (plaster elsewhere):				
5.89	5.23.1.1	On walls in isolated panels, splashbacks, etc	m ²	98		
	5.23.2	FLOOR TILING: Ceramic floor tiles fixed with 'Tylon' Code:CN 12 adhesive to screed (screed elsewhere) and flush pointed with 'Tylon' Code CE 235 Acid Resistant tiling grout				
5.90	5.23.2.1	On floors	m ²	166		
5.91	5.23.2.2	Cut tile skirting 100mm high	m	63,5		
	5.24	PLUMBING AND DRAINAGE (PROVISIONAL):				
	5.24.1	SOIL DRAINAGE: uPVC pipes:				
	5.24.1.1	110mm Pipes laid in and including trenches not exceeding 1 000mm deep.	m	100		
		Extra over uPVC pipes for fittings:				
	5.24.1.2	110mm Bend.	No	5		
	5.24.1.3	110mm Access junction.	No	25		
	5.24.1.4	Sundries: Unreinforced concrete encasing to 50mm horizontal pipe.	m	—		
	5.24.1.5	Unreinforced concrete encasing to 110mm horizontal pipe.	m	—		
	5.25	RAINWATER DISPOSAL: White PVC pipes				
5.92	5.25.1	100 x 125mm Rectangular section eaves gutter with 20mm wide overlapping joints sealed with and including "Compriband" or other approved bitumen sealing strip and rivetted at 20mm centres.	m	86,4		
5.93	5.25.2	Extra over 100 x 125mm eaves gutter for stopped end.	No	—		
5.94	5.25.3	Extra over 100 x 125mm eaves gutter for outlet for 100 x 76mm downpipe including galvanized wire balloon grating.	No	4		
5.95	5.25.4	100mm x 76mm Rainwater pipe with brackets fixed to brick wall or concrete.	m	12		
5.96	5.25.5	Extra over 100 x 76mm rainwater pipe for shoe.	No	4		
5.97	5.25.6	Extra over 100 x 76mm rainwater pipe for eaves or plinth offset 500mm projection.	No	4		
5.98	5.25.7	Vaal: Vaal Sanitaryware vitreous china 510 x 405mm rounded "Hibiscus" code 7023 basin with one taphole	No	6		
5.99	5.25.8	Vaal Sanitaryware vitreous china 455 x 290mm "Bantam" basin (product code: 7030) with two semi-punched tapholes, integrated overflow and chainstay hole including concealed brackets.	No	—		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
5.100	5.25.9	White "Protea" wc pan with heavy duty double flap plastic seat, complete with	No	7		
5.101	5.25.10	"Shires Lynx" heavy duty cistern complete Vaal - Protea Paraplegic Din 90 degrees white vitreous china outlet pan with matching 9 litre cistern, complete with lid, fitments, purpose made CP side flush lever mounted on wall adjacent to cistern and with white timber double flap toilet seat	No	2		
5.102	5.25.11	385 x 610mm White "Lavatera" wall mounted urinal with top inlet and CP spreader on and including necessary wall brackets (flushmaster elsewhere).	No	—		
5.103	5.25.12	Cobra Watertech: 32mm "301" Basin waste union.	No	6		
	5.26	TRAPS, ETC.:				
5.104	5.26.1	Cobra Watertech: VA 2.360 sink "S or P" trap.	No	6		
5.105	5.26.2	32mm "345/50" CP bottle trap.	No	—		
5.106	5.26.3	32mm shower trap including chrome plated grating	No	9		
	5.27	TAPS, VALVES, ETC.:				
5.107	5.27.1	Cobra Watertech: 15mm CP stop taps	No	9		
5.108	5.27.2	15mm "139 Star" CP underwall pattern stopcock.	No	—		
5.109	5.27.3	15mm chrome plated showerhead with self-cleaning spray nozzle, including flanged shower arm and two stop taps all complete as per Engineers spec	No	9		
5.110	5.27.4	15mm CP star pattern pillar tap.	No	6		
5.111	5.27.5	15mm CP elbow "medical" action pillar taps code 505-21	No	—		
5.112	5.27.6	15mm "FJT 5.5" CP urinal tail pipe.	No	—		
5.113	5.27.7	FJ 6000 CP Flushmaster Junior urinal flushing valve.	No	—		
5.114	5.27.8	Masterbox valve set.	No	3		
	5.28	SANITARY PLUMBING:				
		uPVC pipes:				
5.115	5.28.1	50mm Pipes.	m	50		
5.116	5.28.2	110mm Pipes.	m	19,5		
		Extra over uPVC pipes for fittings:				
5.117	5.28.3	50mm Access bend.	No	26		
5.118	5.28.4	50mm Junctions.	No	26		
5.119	5.28.5	110mm Bend	No	9		
5.120	5.28.6	110mm Straight pan connector	No	9		
5.121	5.28.7	110mm Bent pan connector	No	—		
5.122	5.28.8	110mm Access heel bend.	No	9		
5.123	5.28.9	110mm Access reducing junction.	No	14		
5.124	5.28.10	110mm Vent valve.	No	9		
		Sundries:				
5.125	5.28.11	Test waste pipe system.	Sum	1		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	5.29	WATER SUPPLIES:				
5.126	5.29.1	HDPE underground Building/ House connection 32mm Pipes complete with fittings	m	5		
5.127	5.29.2	15mm Pipes complete with fittings	m	5		
5.128	5.29.3	Class O copper pipes: 15mm Pipes.	m	118		
5.129	5.29.4	22mm Pipes.	m	82,5		
5.130	5.29.5	Extra over class O copper pipes for capillary fittings: 15mm Fittings.	No	132		
5.131	5.29.6	22mm Fittings.	No	45		
5.132	5.29.7	Copper overflow and service pipes: 15mm Service pipe 300mm girth.	No	25		
5.133	5.29.8	22mm Service pipe 300mm girth.	No	15		
	5.30	FIRE APPLIANCES ETC				
	5.30.1	9kg DCP dry powder portable fire extinguisher on and including wrought meranti backboard size 1000 x 255 x 25mm thick plugged and screwed to wall and finished with two coats of polyurethane varnish, including 120 x 20 x 2mm mild steel strip bent to form hook	No	3		
	5.30.2	Everyway' or similar approved product hose reel complete with 30m plastic hose, chromium plated stopcock, shut-off nozzle and wall bracket	No	2		
	5.31	ELECTRIC WATER HEATERS:				
5.134	5.31.1	Kwikot: 150 Litre horizontal type electric water heater including drip tray.	No	2		
	5.32	BUILDER'S WORK, INCLUDING ALL MAKING GOOD:				
5.135	5.32.1	Fair cutting and fittings face bricks around pipe not exceeding 100mm diameter.	No	54		
5.136	5.32.2	Sundries: Testing water pipe system.	Sum	1		
	5.33	GLAZING:				
	5.33.1	GLAZING TO STEEL WITH PUTTY:				
5.137	5.33.1.1	4mm clear glass: Panes exceeding 0,1 m2 and not exceeding 0,5 m2.	m ²	6,48		
	5.33.1.2	4mm Obscure glass: Panes exceeding 0,1 m2 and not exceeding 0,5 m2.	m ²	2,58		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit		Tendered	
					Rate	Amount
		Total Brought Forward				R
5.138	5.34	TOPS, SHELVES, DOORS, MIRRORS, ETC.:				
	5.34.1	Mirror 600 x 450mm high with six screws.	No	6		
	5.35	PAINTWORK:				
5.139	5.35.1	PAINTWORK, ETC. TO NEW WORK: Two coats brick dressing on: Recessed pointed faced external walls.	m ²	—		
	5.36	ON PLASTER, ETC.				
5.140	5.36.1	One coat approved quality plaster primer and two coats "Double Velvet Wall Coating" on: On internal plastered walls	m ²	495		
	5.37	ON PLASTER BOARD				
5.141	5.37.1	One coat "Plascon UC.56 Merit" primer and two coats "EPL Polvyn Super Acrylic" on: On ceilings and cornices	m ²	130		
	5.38	ON FIBRE-CEMENT:				
5.142	5.38.1	One coat approved quality primer, one coat universal undercoat and two coats high gloss enamel on: Fascias and barge boards.	m ²	16,9		
	5.39	ON METAL:				
5.143	5.39.1	Spot priming defects in pre-primed surfaces with "Plascon UC.53 Namelcote" zink chromate primer, one coat "UC-1 Merit" universal undercoat and two coats universal enamel gloss paint on: Door frames.	m ²	19,5		
5.144	5.39.2	Windows with burglar bars.	m ²	22,5		
5.145	5.39.3	Gates, grilles, burglar screens, balustrades, etc. (both sides measured over the full flat area).	m ²	9,8		
	5.40	ON WOOD:				
5.146	5.40.1	One coat "Plason PNW.22 Sunproof" wood coating thinned by 10% "AZH" mineral turpentine and two coats un-thinned "Plascon PNW.22 Sunproof" wood coating, lightly sanded down between coats on: Doors(External).	m ²	19,85		
	5.40.2	Benches	m ²	12		
5.147	5.40.3	One coat "Plascon UC.2" pink oil based wood primer, one coat "UC.1 Merit" universal undercoat and two coats universal enamel gloss paint on: Doors(Internal) .	m ²	42,5		
	5.41	ELECTRICAL WORK:				
5.148	5.41.1	All electrical plumbing: DB box, plugs, switches and lights	Sum	1		
		TOTAL CARRIED FORWARD TO SUMMARY				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		SCHEDULE 6: BUILDING WORKS:				
		PUBLIC ABLUTION FACILITIES				
		The Tenderer is referred to the relevant Clauses in the separate document Model Preambles for Trades (2008 Edition) and the Supplementary Preambles hereunder.				
		EARTHWORKS (PROVISIONAL):				
	6.1	EXCAVATIONS:				
		Excavation in earth not exceeding 2m deep				
6.1	6.1.1	Trenches, holes and thickening under surface beds etc.	m ³	37		
		Extra over excavation in earth for excavation in				
6.2	6.1.2	Soft rock	m ³	37		
6.3	6.1.3	Hard rock	m ³	—		
		Extra over all excavations for carting away				
6.4	6.1.4	Surplus material from excavations and/or stock piles on site to a dumping site to be located by the contractor	m ³	12		
		Risk of collapse of excavations				
6.5	6.1.5	Sides of trench and hole excavations not exceeding 1,5m deep	m ²	—		
		Keeping excavations free of water				
6.6	6.1.6	Keeping excavations free of all water other than subterranean water	Sum	1		
		Earth filling obtained from the excavations and/or prescribed stock piles on site compacted to 90% Mod AASHTO density				
6.7	6.1.7	Backfilling to trenches, holes, etc	m ³	14		
		G5 earth filling material supplied by the contractor compacted to 98% Mod AASHTO density in layers not exceeding 150mm thick				
6.8	6.1.8	Under floors, steps, pavings, etc	m ³	29		
6.9		Coarse river sand filling supplied by the contractor				
	6.1.9	25mm Thick dry, clean, washed riversand layer evenly spread over filling (elsewhere), levelled, watered and rammed to receive waterproof membrane (elsewhere) under solid floors.	m ²	192,6		
		Compaction of surfaces				
6.10	6.1.10	Compaction of ground surface under floors, trenches, etc including scarifying for a depth of 150mm, breaking down oversize material, adding suitable material where necessary and compacting to 90% Mod AASHTO density	m ²	192,6		
		Soil insecticide				
6.11	6.1.11	Under floors etc including forming and poisoning shallow furrows against foundation walls etc, filling in furrows and ramming	m ²	142,6		
6.12	6.1.12	To bottoms and sides of trenches etc	m ²	58		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	6.2	CONCRETE, FORMWORK AND REINFORCEMENT:				
	6.2.1	UNREINFORCED CONCRETE				
		25MPa/19mm concrete				
6.13	6.2.1.1	Ramps	m ³	6,8		
6.14	6.2.1.2	Steps, etc.	m ³	6,6		
	6.2.2	REINFORCED CONCRETE				
		25MPa/19mm concrete				
6.15	6.2.2.1	Strip footings	m ³	17,25		
	6.2.2.2	In surface beds cast over waterproofing membrane (elsewhere).	m ³	23,76		
6.16	6.2.2.3	Column bases	m ³	—		
6.17	6.2.2.4	Columns	m ³	—		
6.18	6.2.2.5	Concrete slab	m ³	—		
	6.2.3	TEST BLOCKS				
6.19	6.2.3.1	Making and testing 150 x 150 x 150mm concrete strength test cube (Provisional)	No	12		
	6.2.4	CONCRETE SUNDRIES				
		Finishing top surfaces of concrete smooth with a wood float				
6.20	6.2.4.1	Surface beds, slabs, etc	m ²	192,6		
	6.2.5	ROUGH FORMWORK:				
6.21	6.2.5.1	Edges, risers, ends and reveals not exceeding 300mm high or wide.	m	—		
	6.2.6	SMOOTH FORMWORK (DEGREE OF ACCURACY II)				
		Smooth formwork to sides				
6.22	6.2.6.1	Columns	m ²	—		
		Smooth formwork to soffits				
6.23	6.2.6.2	Slabs propped up exceeding 1.50m and not exceeding 3.50m high	m ²	—		
	6.2.7	MOVEMENT JOINTS ETC (PROVISIONAL)				
		Expansion joints with softboard between vertical concrete and brick surfaces				
6.24	6.2.7.1	Joints not exceeding 300mm high	m	120		
	6.2.7.2	10 x 12mm polysulphide sealant	m	120		
	6.2.8	REINFORCEMENT (PROVISIONAL)				
		Mild yield deformed type II steel reinforcement to concrete as described including all bending, hooked ends, binding wire and temporary supports				
6.25	6.2.8.1	Steel bar reinforcement in various sizes	t	1,5		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
6.26	6.2.8.2	High yield deformed type II steel reinforcement to concrete as described including all bending, hooked ends, binding wire and temporary supports Steel bar reinforcement in various sizes	t	1		
6.27	6.2.8.3	Fabric reinforcement Type Ref 193 fabric reinforcement in concrete surface beds, slabs, etc	m ²	192,6		
	6.3	MASONRY:				
	6.3.1	FOUNDATIONS (PROVISIONAL)				
6.28	6.3.1.1	Brickwork of NFP bricks in class II mortar One brick walls	m ²	57		
6.29	6.3.2	BRICK REINFORCEMENT:				
	6.3.2.1	Brick reinforcement 150mm wide built into brick walls with sufficient laps at end joints, angles and intersections (measured nett).	m	575		
	6.3.3	FACE BRICKWORK				
		Face brick (PC R5,000/1000) pointed with square recessed horizontal and vertical joints:				
6.30	6.3.3.1	Extra over brickwork for face brickwork in foundations	m ²	13		
	6.3.4	SUPERSTRUCTURE				
		Brickwork of NFX bricks (14 Mpa nominal compressive strength) in class I mortar				
6.31	6.3.4.1	Half brick walls	m ²	135		
6.32	6.3.4.2	Half brick walls in beamfilling	m ²	15,5		
6.33	6.3.4.3	One brick walls	m ²	285		
	6.3.5	BRICKWORK SUNDRIES				
		Movement Joints				
6.34	6.3.5.1	10mm 'Jointex' expansion joint built in vertically between brick walls	m ²	4		
6.35	6.3.5.2	Movement joint formed of 20mm softboard built in vertically between brick wall and concrete	m	100		
		Steel reinforcing bars				
6.36	6.3.5.3	6mm Diameter mild steel bars (In Foundations)	t	—		
6.37	6.3.5.4	8mm Diameter mild steel bars	t	—		
		Brickwork reinforcement				
6.38	6.3.5.5	75mm Wide reinforcement built in horizontally	m	560		
6.39	6.3.5.6	150mm Wide reinforcement built in horizontally	m	960		
		Prestressed fabricated lintels				
6.40	6.3.5.7	220 x 75mm Lintels in lengths not exceeding 3m	m	36		
6.41	6.3.5.8	110 x 75mm Lintels in lengths not exceeding 3m	m	21		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
6.42	6.3.5.9	Turning pieces 220mm Wide turning piece to lintels etc	m	—		
6.43	6.3.5.10	Galvanised wire ties, etc 2,5mm plain galvanised wire bent twisted and tied through every third brick on edge lintels	No	2		
6.44	6.3.5.11	Galvanised hoop iron cramps, ties, etc 30 x 1,6mm Wall tie 500mm girth with V-drip in centre built into brickwork across expansion joint	No	2		
	6.3.6 6.3.6.1	AIR BRICKS: 222 x 155mm Terra-cotta vermin proof air bricks with gauze backing and building into opening in brickwork in cement mortar.	No	30		
6.45	6.3.7	FACE BRICKWORK Face brick/ Morroco Travertine FBA pointed with square recessed horizontal and vertical joints:				
	6.3.7.1	Extra over ordinary brickwork for facing and pointing in stretcher bond	m ²	5		
	6.3.7.2	Extra over brickwork in beamfilling for face brickwork.	m ²	5		
6.46	6.3.7.3	Brick-on-edge header course copings, sills, etc. of Face brick pointed with recessed joints on all exposed faces: Extra over brickwork for brick-on-edge header course lintel pointed on face and 110mm soffit	m	—		
6.47	6.3.7.4	Extra over ordinary brickwork for brick-on-edge header course lintel pointed on 220mm wide soffit and both ends.	m	38		
6.48	6.3.7.5	Brick-on-edge header course sill set sloping and slightly projecting pointed on all exposed faces	m	—		
6.49	6.3.7.6	Fair raking cutting.	m	—		
	6.4	WATERPROOFING:				
6.50	6.4.1 6.4.1.1	WATERPROOFING TO WALLS: 375 Micron embossed black polyethylene damp-proof course to walls, sills, etc. (measured nett).	m ²	40		
6.51	6.4.2	WATERPROOFING UNDER FLOORS, ETC.: Colour coded polyethylene sheeting complying with SABS 952, Type C, in widest practicable widths with all joints lapped and sealed in accordance with the manufacturer's instructions:				
	6.4.2.1	250 Micron green medium density sheeting laid loose on top of sand bed (elsewhere) under solid floors with pressure sensitive tape jointing.	m ²	165		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
6.52	6.4.3 6.4.3.1	JOINT SEALANTS ETC 10 x 10mm Polysulphide sealing compound including backing cord, bond breaker, primer, etc.	m	148		
6.53	6.4.3.2	Clear silicone sealer In joints between worktops and sanitary fittings, etc	m	—		
	6.4.4	ROOF COVERINGS, ETC.:				
6.54	6.4.4.1	Chromadeck roofing sheets Roof covering with pitch not exceeding 25 degrees, in transportable lengths not exceeding 20m fixed to timber purlins.	m ²	195		
	6.4.4.2	Standard sheet iron ridge covering fixed to timber purlins	m	42		
6.55	6.4.4.3	Side cladding	m ²	—		
6.56	6.4.4.4	Standard sheet iron ridge covering fixed to steel purlins (elsewhere).	m	—		
6.57	6.4.4.5	Sheet iron gable trim 370mm girth three times bent to detail and fixed to roof sheeting (elsewhere)	m	—		
6.58	6.4.4.6	Rolled edge at verge.	m	—		
	6.4.4.7	Valley flashing	m	4,5		
6.59	6.4.5	ROOF AND WALL INSULATION Fibreglass reinforced aluminium foil faced resin bonded glass fibre flexible building insulation				
	6.4.5.1	50mm Insulation laid taut over purlins and fixed concurrent with roof covering including galvanised steel straining wires	m ²	195		
	6.5	CARPENTRY AND JOINERY:				
	6.5.1	ROOF CONSTRUCTION:				
6.60	6.5.1.1	Roof construction including trusses, permanent bracing, wall plates, purlins, etc.as per engineer drawings	No	1		
	6.5.2	WOOD PRESERVATIVE:				
	6.5.2.1	Two coats creosote on sawn and wrought timbers.	m ²	6		
	6.5.3	FASCIAS AND BARGE BOARDS:				
	6.5.3.1	Tempered fibre cement: 15 x 225mm Fascia or barge board countersunk screwed to support and roof timbers (elsewhere) with one brass screw at maximum 750mm centres and jointed with and including standard aluminium half round cover strips at all joints.	m	75		
	6.5.3	DOORS ETC				
6.61	6.5.3.1	40mm solid core flush panel door: hardboard faced 10mm hardwood strips on vertical sides to conceal edge to full length 10mm horizontal hardwood strip to conceal bottom edge for 230mm wall 40mm Door, size 813 x 2094 mm high (LI/SC)	No	4		
6.62	6.5.3.2	40mm semi-solid core flush panel door: hardboard faced 10mm hardwood strips on vertical sides to conceal edge to full length 10mm horizontal hardwood strip to conceal bottom edge for 115mm wall 40mm Door, size 813 x 2094 mm high (LI/SC)	No	—		
6.63	6.5.3.2	Semi-solid flush panel masonite doors: 40 x 813 x 2032mm Door.	No	21		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	6.6	CEILINGS, PARTITIONS AND ACCESS FLOORING:				
	6.6.1	NAILED UP CEILINGS				
		6.4mm "Rhino" gypsum plasterboard with 4mm x 45mm gypsum ceiling jointing strips				
6.64	6.6.1.1	Ceilings including 38 x 38mm sawn softwood banding at 600mm centres	m ²	149		
6.65	6.6.1.2	Extra over ceiling for hinged pressed metal trap door size 600 x 600mm including all necessary ironmongery.	No	3		
	6.6.2	CORNICES				
		Rhino gypsum plasterboard cornices				
6.66	6.6.2.1	75mm Coved cornices	m	113		
	6.7	JOINERY SUNDRIES				
	6.7.1	FITTINGS				
		Melamine				
6.67	6.7.1.1	Kiosk L- shaped cupboards 32mm formica tops, opening for sink, shelving, doors, handles, drawers, etc complete with fabrication and fixing (3050mm wide x 900mm high)	No	1		
6.68	6.7.1.2	Kiosk Straight shaped cupboards 32mm formica tops, opening for sink, shelving, doors, handles, drawers, etc complete with fabrication and fixing (4800mm wide x 900mm high)	No	1		
	6.8	IRONMONGERY:				
	6.8.1	HINGES, BOLTS, ETC				
		Solid or similar approved product				
6.69	6.8.1.1	100mm Chromium plated brass barrel bolt	No	—		
6.70	6.8.1.2	Art 208/C91/225 bolt	No	—		
	6.8.2	LOCKS				
		Solid or similar approved product				
6.71	6.8.2.1	Three lever cylinder lockset	No	24		
6.72	6.8.2.2	Design hardware (B3635) stainless steel indicator bolt	No	21		
	6.8.3	HANDLES				
		Solid or similar approved product				
6.73	6.8.3.1	Design hardware (B3084) anodised aluminium lever handle.	No	—		
6.74	6.8.3.2	Pull handle for paraplegic door	No	—		
	6.8.4	DOOR CLOSERS				
6.75	6.8.4.1	Door closer in Design Hardware Status 983 with delay for paraplegics	No	—		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	6.8.5	LETTERS, NAMEPLATES, ETC. (PROVISIONAL):				
6.76	6.8.5.1	Standard anodised aluminium plate with male or female symbol	No	21		
6.77	6.8.5.2	Standard anodised aluminium plate with no smoking symbol	No	—		
6.78	6.8.5.3	Standard anodised aluminium plate with paraplegic symbol(for individuals with dissability)	No	2		
6.79	6.8.5.4	Standard anodised aluminium plate with fire exit, fire extinguisher, fire hose reel or fire hydrant symbol	No	3		
	6.9	BATHROOM FITTINGS				
		Sanitech				
6.80	6.9.1	Sanicare Toilet Roll Holder- holds 2 rolls (stainless steel)	No	21		
6.81	6.9.2	Sanicare 1 Litre Top Up Liquid Soap Dispencer (Stainless Steel)	No	9		
6.82	6.9.3	Sanitech Roll Control paper towel dispencer (Stainless Steel).	No	21		
6.83	6.9.4	Sanicare Manual fem Bins.	No	3		
	6.9.5	SUNDRIES:				
6.84	6.9.5.1	24mm design hardware black rubber door stop (B3345) plugged to wall or floor.	No	24		
6.85	6.9.5.2	B1695 480 x 3 500 x 60 mm Key cabinet	No	—		
	6.9.6	PUSH PLATES AND KICKING PLATES				
		Union or similar and approved				
6.86	6.9.6.1	Union AL 5022 - 06 150 x 150mm plate (no piercing) with clearly visible engraving 'PUSH' (2 off)	No	—		
6.87	6.9.6.2	Union AL 5021 - 06push plate (no piercing) with clearly visible engraving 'PULL'	No	—		
		Union or similar and approved				
6.88	6.9.6.3	Union kick plate.	No	2		
6.89	6.9.6.4	Pull handle for paraplegic doors.	No	2		
		Stainless steel:				
6.90	6.9.6.5	Stainless steel wall-mounted rear grab rail around the cistern as Chairman industries	No	2		
6.91	6.9.6.6	Flushvalve Grab Rail Design Hardware B3774	No	—		
	6.10	METALWORK:				
	6.10.1	SECURITY GATES:				
6.92		Steel security grille gates formed of 30 x 50mm rectangular tubing for outer frame including two center rails with an "Ultra" lock and filled in with 16mm x 16mm solid square bar at 100mm centres, screens, etc. installed complete including all subframes, bolts, expansion bolts, etc.:				
6.93	6.10.1.1	Steel fixed security grille gate size 900 x 2 100mm	No	4		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
6.94	6.10.2.1	PRESSED STEEL DOOR FRAMES: 1,6mm Double rebated pressed steel door frames suitable for half brick walls: Frame for door size 813 x 2 032mm with two 100mm steel butts - hinge pins to be welded	No	21		
6.95	6.10.2.2	1,6mm Double rebated pressed steel door frames suitable for one brick walls: Frame for double door 813 x 2 032mm high	No	4		
6.96	6.10.2.3	Frame for double door 1,600 x 2,100mm high	No	—		
	6.10.3	STEEL WINDOWS: Standard residential windows with burglar proofing and 3 x 30mm mild steel flat section welded to inside sash at the top of the window frame:				
6.97	6.10.3.1	Window type NE1, 530 x 650mm high.	No	30		
6.98	6.10.3.2	Window type NC5F, 530 x 950mm high.	No	2		
6.99	6.10.3.3	Window type NC3, 1500 x 949mm high.	No	1		
	6.10.4	ROLLER SHUTTERS				
6.100	6.10.4.1	Roll-Up Serranda Series 500 galvanised mild steel electrically operated 75 x 0,6mm thick slatted curtain roller shutter with lockable push button control for opening 900 x 1075mm high with overhead box 335mm high, standard bottom rail, 75mm wide guides, extruded aluminium T-bar with rubber seal, hot dip galvanised ancillary components including 4,5mm thick end plates, guide rails, centre lock, fixed to structural steel jambs and structural steel beam, the shutter controlled by security mounted key switch, to be operated with a JP 35 motor connected to 3-phase power supply.	No	—		
	6.10.5	SERVICE HATCH (kiosk and kitchenette)				
6.101	6.10.5.1	Aluglass Bautech Varifold Elegance natural cherry wood veneered folding single door size 1200 x 1034mm high comprising stabilised chip core segments faced with veneer and hinged together with full height anodised aluminium extrusion with matching veneered wooden inserts including anodised lockset, hung from natural anodised aluminium track plugged and screwed to brickwork with ball bearing rollers, track cover, ironmongery. etc	No	—		
	6.11	PLASTERING:				
	6.11.1	SCREEDS				
6.102	6.11.1.1	Screeds on concrete: 25mm Thick on floors and landings.	m ²	175		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	6.12	INTERNAL PLASTER:				
	6.12.1	ONE COAT (4:1) CEMENT PLASTER FINISHED TO A SMOOTH AND EVEN STEEL TROWELLED SURFACE: On brickwork:				
6.103	6.12.1.1	On walls.	m ²	525		
6.104	6.12.1.2	On narrow widths.	m ²	10		
	6.12.2	EXTERNAL PLASTER:				
		ONE COAT (3:1) CEMENT PLASTER FINISHED TO A SMOOTH AND EVEN STEEL TROWELLED SURFACE: On concrete:				
6.105	6.12.2.1	On narrow widths.	m ²	—		
	6.13	TILING:				
	6.13.1	WALL TILING: 150 x150mm White glazed ceramic tiles fixed with adhesive to plaster (plaster elsewhere):				
6.106	6.13.1.1	On walls in isolated panels, splashbacks, etc	m ²	168		
	6.13.2	FLOOR TILING: Ceramic floor tiles fixed with 'Tylon' Code:CN 12 adhesive to screed (screed elsewhere) and flush pointed with 'Tylon' Code CE 235 Acid Resistant tiling grout				
6.107	6.13.2.1	On floors	m ²	175		
6.108	6.13.2.2	Cut tile skirting 100mm high	m	32		
	6.14	PLUMBING AND DRAINAGE (PROVISIONAL):				
	6.14.1	SOIL DRAINAGE: uPVC pipes:				
6.109	6.14.1.1	110mm Pipes laid in and including trenches not exceeding 1 000mm deep.	m	75		
		Extra over uPVC pipes for fittings:				
6.110	6.14.1.2	110mm Bend.	No	118		
6.111	6.14.1.3	110mm Access junction.	No	39		
	6.14.2	Sundries:				
6.112	6.14.2.1	Unreinforced concrete encasing to 50mm horizontal pipe.	m	—		
6.113	6.14.2.2	Unreinforced concrete encasing to 110mm horizontal pipe.	m	—		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	6.14.3	RAINWATER DISPOSAL:				
6.114	6.14.3.1	0,6mm Galvanized sheet iron Class Z 275: 100 x 125mm Rectangular section eaves gutter with 20mm wide overlapping joints sealed with and including "Compriband" or other approved bitumen sealer and rivetted at 20mm centres.	m	85		
6.115	6.14.3.2	Extra over 100 x 125mm eaves gutter for stopped end.	No	—		
6.116	6.14.3.3	Extra over 100 x 125mm eaves gutter for outlet for 100 x 76mm downpipe including galvanized wire balloon grating.	No	5		
6.117	6.14.3.4	100mm x 76mm Rainwater pipe with brackets fixed to brick wall or concrete.	m	15		
6.118	6.14.3.5	Extra over 100 x 76mm rainwater pipe for shoe.	No	5		
6.119	6.14.3.6	Extra over 100 x 76mm rainwater pipe for eaves or plinth offset 500mm projection.	No	5		
	6.14.4	SANITARY FITTINGS:				
6.120	6.14.4.1	Stainless steel drop-in sink (code: SDI-120-CS), size 1200 x 435mm wide with 395 x 330 x 170mm deep bowl, 38mm waste outlet and folded edges, fitted into worktop of cupboard (elsewhere specified) with fixing clips		1		
6.121	6.14.4.2	Vaal: Vaal Sanitaryware vitreous china 510 x 405mm rounded "Hibiscus" code 7023 basin with one taphole	No	9		
6.122	6.14.4.3	Vaal Sanitaryware vitreous china "Daisy" semi-close coupled 90 degrees outlet open rim washdown pan (code 751400) and matching 9 litre cistern (code 710532) complete with lid, fitments and flush pipe elbow.	No	—		
6.123	6.14.4.4	Vaal - Protea Paraplegic Din 90 degrees white vitreous china outlet pan code 750200 with matching 9 litre cistern code 710631, complete with lid, fitments, purpose made CP side flush lever mounted on wall adjacent to cistern and with white timber double flap toilet seat	No	21		
6.124	6.14.4.5	385 x 610mm White Vaal "Lavatera" wall mounted urinal with top inlet and CP spreader on and including necessary wall bracket (flushmaster elsewhere).	No	9		
	6.14.5	WASTE UNIONS, ETC.:				
6.125	6.14.5.1	Cobra Watertech: 32mm "301" Basin waste union.	No	9		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	6.14.6	TRAPS, ETC.: Cobra Watertech:				
6.126	6.14.6.1	VA 2.360 sink "P" trap.	No	9		
6.127	6.14.6.2	80mm Cast iron glass enamelled internally urinal trap cast into concrete including caulked lead joint to cast iron pipe and CP outlet grille.	No	9		
6.128	6.14.6.3	Short length of 80mm cast iron pipe, glass enamelled internally, with enlarged socket for urinal outlet, cast into concrete, including caulked lead joint to urinal trap.	No	—		
	6.14.7	TAPS, VALVES, ETC.:				
6.129	6.14.7.1	Cobra carina 296 CA sink mixer	No	1		
6.130	6.14.7.2	15mm CP "Carina" single tap hole for basin	No	9		
6.131	6.14.7.3	FJ 6000 CP Flushmaster urinal flushing valve.	No	9		
6.132	6.14.7.4	15mm "FJT 5.5" CP urinal tail pipe.	No	9		
		Cobra Watertech:				
6.133	6.14.7.5	15mm CP stop tap	No	9		
6.134	6.14.7.6	22mm "131" Brass stopcock.	No	—		
6.135	6.14.7.7	15mm "111" CP heavy pattern pillartap.	No	9		
	6.14.8	SANITARY PLUMBING:				
		uPVC pipes:				
6.136	6.14.8.1	50mm Pipes.	m	40		
6.137	6.14.8.2	110mm Pipes.	m	18		
		Extra over uPVC pipes for fittings:				
6.138	6.14.8.3	50mm Access bend.	No	37		
6.139	6.14.8.4	110mm Access heel bend.	No	21		
6.140	6.14.8.5	110mm Straight pan connector	No	21		
6.141	6.14.8.6	110mm Bent pan connector	No	—		
6.142	6.14.8.7	110mm Access heel bend.	No	—		
6.143	6.14.8.8	110mm Access reducing junction.	No	21		
6.144	6.14.8.9	110mm Vent valve.	No	21		
		Sundries:				
6.145	6.14.8.10	Test waste pipe system.	Sum	1		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	6.14.9	WATER SUPPLIES:				
6.146	6.14.9.1	HDPE underground Building/ House connection 32mm Pipes complete with fittings	m	5		
6.147	6.14.9.2	15mm Pipes complete with fittings	m	5		
		Extra over HDPE fittings				
6.148	6.1.4.9.3	32mm fittings	No	—		
6.149	6.1.4.9.4	15mm fittings	No	—		
		Class O copper pipes:				
6.150	6.14.9.5	15mm Pipes.	m	65		
6.151	6.14.9.6	22mm Pipes.	m	—		
		Extra over class O copper pipes for capillary fittings:				
6.152	6.14.9.7	15mm Fittings.	No	78		
6.153	6.14.9.8	22mm Fittings.	No	—		
		Copper overflow and service pipes:				
6.154	6.14.9.9	15mm Service pipe 300mm girth.	No	55		
6.155	6.14.9.10	22mm Service pipe 300mm girth.	No	—		
		Sundries:				
6.156	6.14.9.11	Testing water pipe system.	Item	1		
	6.15	FIRE APPLIANCES ETC				
6.157	6.15.1	9kg DCP dry powder portable fire extinguisher on and including wrought meranti backboard size 1000 x 255 x 25mm thick plugged and screwed to wall and finished with two coats of polyurethane varnish, including 120 x 20 x 2mm mild steel strip bent to form hook	No	3		
6.158	6.15.2	Everyway' or similar approved product hose reel complete with 30m plastic hose, chromium plated stopcock, shut-off nozzle and wall bracket	No	2		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	6.16	ELECTRIC WATER HEATERS:				
		Kwikot:				
6.159	6.16.1	100 Litre horizontal type electric water heater including drip tray.	No	—		
	6.17	BUILDER'S WORK, INCLUDING ALL MAKING GOOD:				
6.160	6.17.1	Fair cutting and fittings face bricks around pipe not exceeding 100mm diameter.	No	—		
	6.18	GLAZING:				
	6.18.1	GLAZING TO STEEL WITH PUTTY:				
		3mm Clear float glass:				
6.161	6.18.1.1	Panes exceeding 0,1 m2 and not exceeding 0,5 m2.	m ²	4		
		4mm Obscure glass:				
6.162	6.18.1.2	Panes exceeding 0,1 m2 and not exceeding 0,5 m2.	m ²	7,7		
	6.18.2	TOPS, SHELVES, DOORS, MIRRORS, ETC.:				
		6mm Silvered float glass copper backed mirrors with polished edges holed for and fixed with chromium plated dome capped mirror screws with rubber buffers to plugs in brickwork or concrete:				
6.163	6.18.2.1	Mirror 600 x 450mm high with six screws.	No	4		
	6.19	PAINTWORK:				
	6.19.1	PAINTWORK, ETC. TO NEW WORK:				
		Two coats brick dressing on:				
6.164	6.19.1.1	Recessed pointed faced external walls.	m ²	—		
	6.19.2	ON PLASTER, ETC.				
		One coat approved quality plaster primer and two coats "Double Velvet Wall Coating" on:				
6.165	6.19.2.1	On internal plastered walls	m ²	535		
	6.19.2	ON PLASTER BOARD				
		One coat "Plascon UC.56 Merit" primer and two coats "EPL Polvyn Super Acrylic" on:				
6.166	6.19.2.1	On ceilings and cornices	m ²	149		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	6.19.3	ON FIBRE-CEMENT: One coat approved quality primer, one coat universal undercoat and two coats high gloss enamel on:				
6.167	6.19.3.1	Fascias and barge boards.	m ²	17		
6.168	6.19.3.2	On round columns	m ²	—		
	6.19.4	ON METAL: Spot priming defects in pre-primed surfaces with "Plascon UC.53 Namelcote" zink chromate primer, one coat "UC-1 Merit" universal undercoat and two coats universal enamel gloss paint on:				
6.169	6.19.4.1	Door frames.	m ²	33		
6.170	6.19.4.2	Windows with burglar bars.	m ²	20		
	6.19.4.3	One coat approved steel primer, one coat universal undercoat and two coats high gloss enamel on: Gates, grilles, burglar screens, balustrades, etc. (both sides measured over the full flat area).	m ²	3,5		
	6.19.4	ON WOOD: Three coats quality clear varnish:				
6.172	6.19.4.1	Doors(External).	m ²	14,5		
6.173	6.19.4.2	Benches.	m ²	0		
	6.19.4.3	One coat "Plascon UC.2" pink oil based wood primer, one coat "UC.1 Merit" universal undercoat and two coats universal enamel gloss paint on: Doors(Internal).	m ²	75		
	6.20	ELECTRICAL WORK:				
6.175	6.20.1	All electrical plumbing: DB box, plugs, switches and lights	Sum	1		
		TOTAL CARRIED FORWARD TO SUMMARY				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		<u>SCHEDULE 7: BUILDING WORKS:</u>				
		<u>GUARD HOUSE</u>				
		The Tenderer is referred to the relevant Clauses in the separate document Model Preambles for Trades (2008 Edition) and the Supplementary Preambles hereunder.				
	7.1	EARTHWORKS (PROVISIONAL):				
	7.1.1	EXCAVATIONS:				
7.1		Excavation in earth not exceeding 2m deep				
	7.1.1.1	Trenches, holes etc	m ³	8		
		Extra over excavation in earth for excavation in				
7.2	7.1.1.2	Soft rock	m ³	8		
7.3	7.1.1.3	Hard rock	m ³	—		R/Only
7.4		Extra over all excavations for carting away				
	7.1.1.4	Surplus material from excavations and/or stock piles on site to a dumping site to be located by the contractor	m ³	3		
7.5		Risk of collapse of excavations				
	7.1.1.5	Sides of trench and hole excavations not exceeding 1,5m deep	m ²	—		R/Only
7.6		Keeping excavations free of water				
	7.1.1.6	Keeping excavations free of all water other than subterranean water	Sum	1		
7.7		Earth filling obtained from the excavations and/or prescribed stock piles on site compacted to 90% Mod AASHTO density				
	7.1.1.7	Backfilling to trenches, holes, etc	m ³	4		
7.8		G5 earth filling material supplied by the contractor compacted to 98% Mod AASHTO density in layers not exceeding 150mm thick				
	7.1.1.8	Under floors, steps, pavings, etc	m ³	3		
7.9		Coarse river sand filling supplied by the contractor				
	7.1.1.9	25mm Thick dry, clean, washed riversand layer evenly spread over filling (elsewhere), levelled, watered and rammed to receive waterproof membrane (elsewhere) under solid floors.	m ²	11		
7.10		Compaction of surfaces				
	7.1.1.10	Compaction of ground surface under floors, trenches, etc including scarifying for a depth of 150mm, breaking down oversize material, adding suitable material where necessary and compacting to 90% Mod AASHTO density	m ²	11		
7.11		Soil insecticide				
	7.1.1.11	Under floors etc including forming and poisoning shallow furrows against foundation walls etc, filling in furrows and ramming	m ²	11		
7.12		To bottoms and sides of trenches etc	m ²	11		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	7,2	CONCRETE, FORMWORK AND REINFORCEMENT:				
	7.2.1	UNREINFORCED CONCRETE 25MPa/19mm concrete				
7.13	7.2.1.1	Ramps	m ³	—		
7.14	7.2.1.2	Steps, etc.	m ³	0,5		
	7.2.2	REINFORCED CONCRETE 25MPa/19mm concrete				
7.15	7.2.2.1	Strip footings	m ³	3,5		
7.16	7.2.2.2	In surface beds cast over waterproofing membrane (elsewhere).	m ³	2		
	7.2.3	TEST BLOCKS				
7.17	7.2.3.1	Making and testing 150 x 150 x 150mm concrete strength test cube (Provisional)	No	6		
	7.2.4	CONCRETE SUNDRIES Finishing top surfaces of concrete smooth with a wood float				
7.18	7.2.4.1	Surface beds, slabs, etc	m ²	11		
	7.2.5	ROUGH FORMWORK: Edges, risers, ends and reveals not exceeding 300mm high or wide.	m	—		
		MOVEMENT JOINTS ETC (PROVISIONAL) Expansion joints with softboard between vertical concrete and brick surfaces				
7.20	7.2.5.1	Joints not exceeding 300mm high	m	25		
	7.2.5.2	10 x 12mm polysulphide sealant	m	25		
	7.2.6	REINFORCEMENT (PROVISIONAL) Mild yield deformed type II steel reinforcement to concrete as described including all bending, hooked ends, binding wire and temporary supports				
7.21	7.2.6.1	Steel bar reinforcement in various sizes	t	0,2		
		High yield deformed type II steel reinforcement to concrete as described including all bending, hooked ends, binding wire and temporary supports				
7.22	7.2.6.2	Steel bar reinforcement in various sizes	t	0,3		
		Fabric reinforcement Type Ref 193 fabric reinforcement in concrete surface beds, slabs, etc				
7.23	7.2.6.3		m ²	11		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	7.3	MASONRY:				
	7.3.1	FOUNDATIONS (PROVISIONAL)				
7.24	7.3.1.1	Brickwork in extra hard burnt clay bricks (15 MPa nominal compressive strength) in class I mortar in loadbearing walls, etc.: One brick wall	m ²	12		
	7.3.2	BRICK REINFORCEMENT:				
	7.3.2.1	Brick reinforcement 150mm wide built into brick walls with sufficient laps at end joints, angles and intersections (measured nett).	m	105		
	7.3.3	FACE BRICKWORK				
7.25	7.3.3.1	Face brick pointed with square recessed horizontal and vertical joints: Extra over brickwork for face brickwork in foundations	m ²	3		
	7.3.4	SUPERSTRUCTURE				
7.26	7.3.4.1	Brickwork of NFP bricks in class II mortar: Half brick wall.	m ²	12		
7.27	7.3.4.2	Half brick wall in beamfilling.	m ²	4		
	7.3.4.3	One brick wall.	m ²	53		
	7.3.5	BRICKWORK SUNDRIES				
		Movement Joints				
7.28	7.3.5.1	10mm 'Jointex' expansion joint built in vertically between brick walls	m ²	1,8		
7.29	7.3.5.2	Movement joint formed of 20mm softboard built in vertically between brick wall and concrete	m	18		
		Brickwork reinforcement				
7.30	7.3.5.3	150mm Wide reinforcement built in horizontally	m	175		
	7.3.5.4	75mm Wide reinforcement built in horizontally	m	42		
		Prestressed fabricated lintels				
7.31	7.3.5.5	220 x 75mm Lintels in lengths not exceeding 3m	m	5		
	7.3.5.6	110 x 75mm Lintels in lengths not exceeding 3m	m	2,4		
		Turning pieces				
7.32	7.3.5.7	220mm Wide turning piece to lintels etc	m	—		
		Galvanised wire ties, etc				
7.33	7.3.5.8	2,5mm plain galvanised wire bent twisted and tied through every third brick on edge lintels	No	1		
		AIR BRICKS:				
	7.3.5.9	222 x 155mm Terra-cotta vermin proof air bricks with gauze backing and building into opening in brickwork in cement mortar.	No	2		
7.34	7.3.5.10	Extra over ordinary brickwork for facing and pointing in stretcher bond	m ²	2		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
7.35	7.3.5.11	Brick-on-edge header course copings, sills, etc. of Face brick pointed with recessed joints on all exposed faces: Extra over brickwork for brick-on-edge header course lintel pointed on face and 110mm soffit	m	—		
7.36	7.3.5.12	Extra over ordinary brickwork for brick-on-edge header course lintel pointed on 220mm wide soffit and both ends.	m	5		
7.37	7.3.5.13	Brick-on-edge header course sill set sloping and slightly projecting pointed on all exposed faces	m	—		
	7.4	WATERPROOFING:				
	7.4.1	WATERPROOFING TO WALLS:				
7.38	7.4.1.1	375 Micron embossed black polyethylene damp-proof course to walls, cills, etc. (measured nett).	m ²	5		
	7.4.2	WATERPROOFING UNDER FLOORS, ETC.:				
7.39		Colour coded polyethylene sheeting complying with SABS 952, Type C, in widest practicable widths with all joints lapped and sealed in accordance with the manufacturer's instructions:				
	7.4.2.1	250 Micron green medium density sheeting laid loose on top of sand bed (elsewhere) under solid floors with pressure sensitive tape jointing.	m ²	16		
	7.4.3	JOINT SEALANTS ETC				
7.40	7.4.3.1	10 x 10mm Polysulphide sealing compound including backing cord, bond breaker, primer, etc.	m	24		
		Clear silicone sealer				
7.41	7.4.3.2	In joints between worktops and sanitary fittings, etc	m	—		
	7.4.4	ROOF COVERINGS, ETC.:				
		Chromadeck roofing sheets				
7.42	7.4.4.1	Roof covering with pitch not exceeding 25 degrees, in transportable lengths not exceeding 20m fixed to timber purlins.	m ²	21		
7.43	7.4.4.2	Standard sheet iron ridge covering fixed to timber purlins (elsewhere).	m	15		
7.44	7.4.4.3	Hip capping	m	0		
	7.4.5	ROOF AND WALL INSULATION				
7.45		Fibreglass reinforced aluminium foil faced resin bonded glass fibre flexible building insulation				
	7.4.5.1	50mm Insulation laid taut over purlins and fixed concurrent with roof covering including galvanised steel straining wires	m ²	21		
		Total Carried Forward				R

MATLEREHENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
		Total Brought Forward				
	7.5	CARPENTRY AND JOINERY:				
	7.5.1	ROOF CONSTRUCTION:				
7.46	7.5.1.1	Roof construction to hipped roof measuring including trusses, permanent bracing ,wall plates, purlins, etc.as per Engineers drawings	No	1		
	7.5.2	WOOD PRESERVATIVE:				
7.47	7.5.2.1	Two coats creosote on sawn and wrought timbers.	m ²	2		
	7.5.3	FASCIAS AND BARGE BOARDS:				
		Tempered fibre cement:				
7.48	7.5.3.1	15 x 225mm Fascia or barge board countersunk screwed to support and roof timbers (elsewhere) with one brass screw at maximum 750mm centres and jointed with and including standard aluminium halfround cover strips at all joints.	m	22		
	7.5.4	DOORS ETC				
		40mm solid core flush panel door: hardboard faced 10mm hardwood strips on vertical sides to conceal edge to full length 10mm horizontal hardwood strip to conceal bottom edge for 230mm wall				
7.49	7.5.4.1	40mm Door, size 813 x 2094 mm high	No	—		
		Aluminium sliding door				
7.50	7.5.4.2	40mm Door, size 1500 x 2032 mm high	No	1		
		Semi-solid flush panel masonite doors:				
	7.5.4.3	40 x 813 x 2032mm Door.	No	2		
	7.6	JOINERY SUNDRIES				
	7.6.1	FITTINGS				
		Melamine				
7.51	7.61.1	Straight shaped 32mm formica tops, shelving, doors, handles, drawers,etc complete with fabrication and fixing(1645mm wide x 900mm high)	No	1		
	7.7	CEILINGS, PARTITIONS AND ACCESS FLOORING:				
	7.7.1	CEILINGS, ETC.:				
		NAILED UP CEILINGS				
		6.4mm "Rhino" gypsum plasterboard with 4mm x 45mm gypsum ceiling jointing strips				
7.52	7.7.1.1	Ceilings including 38 x 38mm sawn softwood brandering at 600mm centres	m ²	15		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
7.53	7.7.1.2	Extra over ceiling for hinged pressed metal trap door size 600 x 600mm including all necessary ironmongery	No	1		
	7.7.2	CORNICES Rhino gypsum plasterboard cornices				
7.54	7.7.2.1	75mm Coved cornices	m	19,5		
	7.8	FLOOR COVERINGS, WALL LININGS, ETC.:				
	7.8.1	FLOOR COVERINGS:				
7.55	7.8.1.1	2mm Semi-flexible vinyl floor tiles size 300 x 300mm laid on cement screed (elsewhere) on floors and in door openings.	m ²	—		
	7.8.2	SKIRTINGS, NOSINGS, ETC				
7.56	7.8.2.1	75mm PVC skirtings	m	—		
	7.8.3	POLISH, SEALERS, ETC				
		Three coats water based floor dressing on:				
7.57	7.8.3.1	Floors	m ²	—		
	7.9	IRONMONGERY:				
	7.9.1	LOCKS				
		Solid or similar approved product				
7.58	7.9.1.1	Three lever cylinder lockset	No	2		
	7.9.1.2	Design hardware (B3635) stainless steel indicator bolt	No	1		
	7.9.1.3	Pull handle for paraplegic door	No	1		
	7.9.2	BATHROOM FITTINGS				
		Sanitech				
7.59	7.9.2.1	Sanicare Toilet Roll Holder- holds 2 rolls (stainless steel)	No	1		
7.60	7.9.2.2	Sanicare 1 Litre Top Up Liquid Soap Dispenser (Stainless Steel)	No	1		
7.61	7.9.2.3	Sanitech Roll Control paper towel dispenser (Stainless Steel).	No	1		
7.62	7.9.2.4	Sanicare Manual fem Bins.	No	1		
	7.8.3	SUNDRIES:				
7.63	7.8.3.1	24mm design hardware black rubber door stop (B3345) plugged to wall or floor.	No	2		
7.64	7.8.3.2	B1695 480 x 3 500 x 60 mm Key cabinet	No	—		
	7.9	METALWORK:				
		1,2mm Double rebated pressed steel door frames suitable for half brick walls:				
7.65	7.9.1	Frame for single door 813 x 2 032mm high	No	2		
	7.9.2	LETTERS, NAMEPLATES, ETC. (PROVISIONAL):				
	7.9.2.1	Standard anodised aluminium plate with fire exit, fire extinguisher, fire hose reel or fire hydrant symbol	No	1		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	7.9.2	STEEL WINDOWS: Standard residential windows with burglar proofing and 3 x 30mm mild steel flat section welded to inside sash at the top of the window frame:				
7.66	7.9.2.1	Window type NE1, 530 x 650mm high.	No	1		
7.67	7.9.2.2	Window type NC5F, 530 x 950mm high.	No	2		
7.68	7.9.2.3	Window type NC3, 1500 x 949mm high.	No	1		
	7.10	PLASTERING:				
	7.10.1	SCREEDS Screeds on concrete:				
7.69	7.10.1.1	25mm Thick on floors and landings.	m ²	19,5		
	7.10.2	INTERNAL PLASTER: ONE COAT (4:1) CEMENT PLASTER FINISHED TO A SMOOTH AND EVEN STEEL TROWELLED SURFACE:				
7.70		On brickwork:				
7.71	7.10.2.1	On walls.	m ²	65		
7.72	7.10.2.2	On narrow widths.	m ²	1		
	7.11	TILING:				
	7.11.1	WALL TILING: 200 x 200mm White glazed ceramic tiles fixed with adhesive to plaster (plaster elsewhere):				
7.73	7.11.1.1	On walls in isolated panels, splashbacks, etc	m ²	15		
	7.11.2	FLOOR TILING: Ceramic floor tiles fixed with 'Tylon' Code:CN 12 adhesive to screed (screed elsewhere) and flush pointed with 'Tylon' Code CE 235 Acid Resistant tiling grout				
7.74	7.11.2.1	On floors	m ²	19,5		
	7.11.2.2	Cut tile skirting 100mm high	m	10		
	7.12	PLUMBING AND DRAINAGE (PROVISIONAL):				
	7.12.1	SOIL DRAINAGE:				
		uPVC pipes:				
7.75	7.12.1.1	110mm Pipes laid in and including trenches not exceeding 1 000mm deep.	m	17,5		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX

SCHEDULE OF QUANTITIES

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
7.76	7.12.1.2	Extra over uPVC pipes for fittings: 110mm Bend.	No	4		
7.77	7.12.1.3	110mm Access junction.	No	1		
	7.12.2	RAINWATER DISPOSAL:				
7.78	7.12.2.1	0,6mm Galvanized sheet iron Class Z 275: 100 x 125mm Rectangular section eaves gutter with 20mm wide overlapping joints sealed with and including "Compriband" or other approved bitumen sealer and rivetted at 20mm centres.	m	22		
7.79	7.12.2.1	Extra over 100 x 125mm eaves gutter for outlet for 100 x 76mm downpipe including galvanized wire balloon grating.	No	2		
7.80	7.12.2.2	100mm x 76mm Rainwater pipe with brackets fixed to brick wall or concrete.	m	5,6		
7.81	7.12.2.3	Extra over 100 x 76mm rainwater pipe for shoe.	No	2		
7.82	7.12.2.4	Extra over 100 x 76mm rainwater pipe for eaves or plinth offset 500mm projection.	No	2		
	7.12.3	SANITARY FITTINGS:				
7.83	7.12.3.1	Vaal: Vaal Sanitaryware vitreous china 510 x 405mm rounded "Hibiscus" code 7023 basin with one taphole	No	1		
7.84	7.12.3.2	Vaal Sanitaryware vitreous china "Daisy" semi-close coupled 90 degrees outlet open rim washdown pan (code 751400) and matching 9 litre cistern (code 710532) complete with lid, fitments and flush pipe elbow.	No	1		
	7.12.4	WASTE UNIONS, ETC.:				
7.85	7.12.4.1	Cobra Watertech: 32mm "301" Basin waste union.	No	1		
	7.12.5	TRAPS, ETC.:				
7.86	7.12.5.1	Cobra Watertech: VA 2.360 sink "P" trap.	No	1		
7.87	7.12.6	TAPS, VALVES, ETC.:				
	7.12.6.1	15mm CP "Carina" single tap hole basin mixer with red and blue inserts	No	1		
7.88	7.12.6.1	Cobra Watertech: 15mm CP stop tap	No	—		
7.89	7.12.6.2	22mm "131" Brass stopcock.	No	—		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
		Total Brought Forward				
	7.12.7	SANITARY PLUMBING:				
		uPVC pipes:				
7.90	7.12.7.1	50mm Pipes.	m	5,5		
7.91	7.12.7.2	110mm Pipes.	m	1,5		
		Extra over uPVC pipes for fittings:				
7.92	7.12.7.3	50mm Access bend.	No	3		
7.93	7.12.7.4	110mm Access heel bend.	No	1		
7.94	7.12.7.5	110mm Straight pan connector	No	1		
7.95	7.12.7.6	110mm Access heel bend.	No	—		
7.96	7.12.7.7	110mm Access reducing junction.	No	1		
7.97	7.12.7.8	110mm Vent valve.	No	1		
	7.12.8	Sundries:				
7.98	7.12.8.1	Test waste pipe system.	Sum	1		
	7.12.9	WATER SUPPLIES:				
		HDPE underground Building/ House connection				
7.99	7.12.9.1	32mm Pipes complete with fittings	m	5		
	7.12.9.2	15mm Pipes complete with fittings	m	5		
		Class O copper pipes:				
7.101	7.12.9.3	15mm Pipes.	m	11		
		Extra over class O copper pipes for capillary fittings:				
7.102	7.12.9.4	15mm Fittings.	No	15		
	7.12.10	Sundries:				
	7.12.10.1	Testing water pipe system.	Sum	1		
	7.13	FIRE APPLIANCES ETC				
7.103	7.13.1	9kg DCP dry powder portable fire extinguisher on and including wrought meranti backboard size 1000 x 255 x 25mm thick plugged and screwed to wall and finished with two coats of polyurethane varnish, including 120 x 20 x 2mm mild steel strip bent to form hook	No	1		
7.104	7.13.2	'Everyway' or similar approved product hose reel complete with 30m plastic hose, chromium plated stopcock, shut-off nozzle and wall bracket	No	1		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
7.105	7.14 7.14.1 7.14.1.1	GLAZING: GLAZING TO STEEL WITH PUTTY: 3mm Clear float glass: Panes exceeding 0,1 m2 and not exceeding 0,5 m2.	m ²	1,1		
7.106	7.14.1.2 7.14.1.3	4mm Obscure glass: Panes exceeding 0,1 m2 and not exceeding 0,5 m2.	m ²	0,97		
7.107	7.14.2 7.14.2.1	TOPS, SHELVES, DOORS, MIRRORS, ETC.: 6mm Silvered float glass copper backed mirrors with polished edges holed for and fixed with chromium plated dome capped mirror screws with rubber buffers to plugs in brickwork or concrete: Mirror 600 x 450mm high with six screws.	No	1		
7.108	7.15 7.15.1 7.15.1.1	PAINTWORK: PAINTWORK, ETC. TO NEW WORK: Two coats brick dressing on: Recessed pointed faced external walls.	m ²	—		
7.109	7.15.2 7.15.2.1	ON PLASTER, ETC. One coat approved quality plaster primer and two coats "Double Velvet Wall Coating" on: On internal plastered walls	m ²	66		
7.110	7.15.3 7.15.3.1	ON PLASTER BOARD One coat "Plascon UC.56 Merit" primer and two coats "EPL Polvyn Super Acrylic" on: On ceilings and cornices	m ²	16		
7.111	7.15.4 7.15.4.1	ON FIBRE-CEMENT: One coat approved quality primer, one coat universal undercoat and two coats high gloss enamel on: Fascias and barge boards.	m ²	5		
7.112	7.15.4 7.15.4.1	ON METAL: Spot priming defects in pre-primed surfaces with "Plascon UC.53 Namelcote" zink chromate primer, one coat "UC-1 Merit" universal undercoat and two coats universal enamel gloss paint on: Door frames.	m ²	2,45		
7.113	7.15.4.2	Windows with burglar bars.	m ²	1,2		
7.114	7.15.5 7.15.5.1	ON WOOD: Three coats quality clear varnish Doors(Internal).	m ²	6,7		
7.115	7.16 7.16.1	ELECTRICAL WORK: All electrical plumbing: DB box, plugs, switches and lights	Sum	1		
		TOTAL CARRIED FORWARD TO SUMMARY				R

MATLEREKENG SPORT COMPLEX

SCHEDULE OF QUANTITIES

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		<u>SCHEDULE 8: SOCCER/RUGBY FIELD AND TRACK,PRACTICE FIELD & COURTS</u> <u>SANS 1200D: EARTHWORKS</u>				
8.1	8.1	Remove grass and soil and stockpile for later use and dispose of excess grass/material.				
8.2	8.1.1	Soccer field/rugby and track	m ²	31250		
8.3	8.1.2	Practice field(Included in Item 2.2)	m ²	1500		
8.4	8.1.3	Courts(Included in Item 2.2)	m ²	3000		
		Rip and compact in-situ earth to 93% modified AASHTO				
8.5	8.1.4	Soccer field/rugby and track	m ³	3125		
8.6	8.1.5	Practice field(Included in Item 2.11)	m ³	225		
8.7	8.1.6	Courts(Included in Item 2.11)	m ³	450		
8.8	8.1.7	Import, spread and level 100mm thick layer of weed free top soil(Soccer field/rugby and track)	m ³	2350		
8.9	8.1.8	Grass field with Kikuyu grass as per SARS Vol. 2 norms & Standards to Engineer's Levels(Supply install and maintain until handover)	m ²	23500		
8.10	8.1.9	Cover grass with 15mm layer of sieved top soil and smooth	m ³	352,5		
		<u>WATER</u>				
8.11		Prior to grassing. Water entire surface to be seeded to obtain moist conditions to not less than 150mm deep including cost of water.				
8.12		Water and maintain newly planted areas immediately after planting and as often as directed by the Engineer until grass is established. (established will be regarded as general cover with bare "spots" of no more than 10% and no "spots" larger than 250mm in diameter. Should cover not be adequate, in the opinion of the Engineer, re grassing at the contractor's expense must be under taken.				
		<u>MOWING</u>				
8.13		Mowing new established grass, when directed by the Engineer using acceptable motorized mowers including disposal of cuttings.				
	8.2	<u>GOAL POSTS</u>				
	8.2.1	<u>Soccer field/rugby and track</u>				
8.14	8.2.1.1	Provide goal posts for field complete as per SARS Vol.2 Technical Specifications including excavation and foundation.	No.	2		
8.15	8.2.1.2	Supply and erect goal netting	No.	2		
	8.2.2	<u>Practice field</u>				
8.16	8.2.2.1	Provide goal posts for field complete as per SARS Vol.2 Technical Specifications including excavation and foundation.	No.	—		
8.17	8.2.2.2	Supply and erect goal netting	No.	—		
	8.2.3	<u>Outdoor Netball</u>				
8.18	8.2.3.1	Provide goal posts for field complete as per SARS Vol.2 Technical Specifications including excavation and foundation.	No.	—		
8.19	8.2.3.2	Supply and erect goal ring & netting	No.	—		
		TOTAL CARRIED FORWARD TO SUMMARY				R

MATLEREKENG SPORT COMPLEX

SCHEDULE OF QUANTITIES

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
8.20	8.2.4 8.2.4.1	<u>Outdoor Tennis</u> Provide goal posts(Set) for field complete as per SARS Vol.2 Technical Specifications including excavation and foundation.	No.	2		
8.21	8.2.4.2	Supply and erect goal netting	No.	2		
8.22	8.2.5 8.2.5.1	<u>Outdoor Basketball</u> Provide goal posts for field complete set with hoops as per SARS Vol.2 Technical Specifications including excavation and	No.	4		
8.23	8.2.6 8.2.6.1	<u>Outdoor Volleyball</u> Provide goal posts(Set) for field complete as per SARS Vol.2 Technical Specifications including excavation and foundation.	No.	2		
8.24	8.2.6.2	Supply and erect goal netting	No.	2		
	8.2.7	<u>LINE MARKINGS</u> Non reflectorized paint applied at a nominal rate of 0.42l/m2				
		a) White lines 50mm wide (unbroken)				
8.25	8.2.7.1	Soccer field/rugby and track	m	6950		
8.26	8.2.7.2	Soccer field/rugby and track setting out lines and premarking	m	6950		
		Courts				
	8.2.8	<u>Non reflectorized paint applied at a nominal rate of 0.42l/m2</u> a) White and yellow lines 50mm wide (broken or unbroken)				
8.27	8.2.8.1	Outdoor Netball	m	348		
8.28	8.2.8.2	Outdoor Tennis	m	348		
8.29	8.2.8.3	Outdoor Basketball	m	338		
8.30	8.2.8.4	Outdoor Volleyball	m	166		
8.31	8.2.8.5	Courts setting out lines and premarking	m	1200		
8.32	8.2.8.6	Site Establishment	Item	1		
8.33	8.2.8.7	Supply and Install heavy duty plastic cover boxes at irrigation connections	No.	2		
8.34	8.2.8.8	Supply irrigation hose as per Engineer's specifications	m	300		
		TOTAL CARRIED FORWARD TO SUMMARY				R

MATLEREKENG SPORT COMPLEX

SCHEDULE OF QUANTITIES

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		<u>SCHEDULE 9: COMBI-COURTS</u>				
	9.1	SANS 1200 MF BASE				
9.1	9.2.1	Construct 150mm thick wearing/base layer with material				
	9.2.2	From stockpile				
9.2	9.2.2.1	a) Supply G5 material, spread and compact to 97% Mod AASHTO	m ³	265		
		Process sub-base material by:				
9.3		a) Stabilisation				
9.4	9.2.2.1	b) Portland cement	t	5		
	9.2.3	CONCRETE WORK				
9.5	9.2.3.1	25MPa/19mm concrete	m ³	175		
9.6	9.2.3.2	In surface beds cast over waterproofing membrane (elsewhere).	m ²	1750		
9.7	9.2.3.3	Mesh wire Ref. 193	m ²	1750		
9.8		Formwork	m ²	35		
	9.2.4	TEST BLOCKS				
9.10	9.2.4.1	Making and testing 150 x 150 x 150mm concrete strength test cube (Provisional)	No	12		
9.11	9.2.4.2	Provide Approved non skid all weather surfacing (as per specifications or as specified by Engineer) for all courts	m ²	1750		
		Specialist				
9.12	9.2.4.3	Supply all materials for slurry and colouring of the courts	m ²	1750		R/Only
9.13	9.2.4.4	Straight and curved kerbing	m	—		R/Only
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
9.14	9.2.5 9.2.5.1	SEGMENTED PAVING Provision of edge restraints	m	200		
9.15	9.2.5.2	Construction of paving in herringbone pattern with: 60mm 25 MPa Concrete light brown interlocking paver	m ²	—		
9.16	9.2.6 9.2.6.1	FENCING Supply all materials for 3.6m high perimeter steel fencing around the tennis courts	m	220		
9.17	9.2.7 9.2.7.1	SEGMENTED PAVING Provision of edge restraints	m	—		
		TOTAL CARRIED FORWARD TO SUMMARY				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		SCHEDULE 10 : WATER/SEWER/STORMWATER				
	SABS 1200DB	PIPE TRENCHES				
	10.1	EXCAVATION				
		Excavating in soft material situated within the following depth ranges:				
10.1	10.1.1	(a) 0m up to 1,5m	m	450		
	10.1.2	BACKFILLING				
10.2	10.1.2.1	(a) Using the excavated material	m ³	100		
10.3	10.1.2.2	(b) Using imported selected material	m ³	—		
		EXTRA OVER ITEMS 10.1.2.1 TO 10.1.2.2 FOR EXCAVATION IN:				
10.4	10.1.2.3	Hard rock material	m ³	—		
	SABS 1200LB	BEDDING (PIPES)				
	10.2	PROVISION OF BEDDING MATERIAL				
	10.2.1	FROM TRENCH EXCAVATIONS				
10.5	10.2.1.1	Selected granular material	m ³	20,25		
10.6	10.2.1.2	Selected fill material	m ³	27,5		
		Supply, lay and bed pipes complete with coupling, test and disinfect ;				
10.7	10.2.1.3	(a) 75mm Dia class 9 HPDE pipe	m	450		
	10.3	<u>BOREHOLE DEVELOPMENT</u>				
10.8	10.3.1	Geohydrological Services				
10.9	10.3.1.1	Sitting of drilling sites. Allowance to be made for desk study, site assessment, drilling supervision, testing supervision, and reporting.	Sum	1		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	10.4	<u>BOREHOLE DRILLING</u>				
10.10	10.4.1	Site Establishment/De-establishment a) Mobilisation and set up of plant to/at first borehole. Rate to include inter-borehole moves and de-establishment from site of the drilling batch.	Sum	1		
	10.4.2	DRILLING				
10.11	10.4.2.1	a) Drilling of 165mm diameter borehole in non-collapsible material.	m	100		
10.12	10.4.2.1	b) Odex drilling in collapsible material and where ordered by the Geohydrologist of 254mm diameter borehole. Rate to include supply, delivery and installation of at least 6mm sidewall Odex casing.	m	—		
10.13	10.4.2.2	c) Casing, including supply, delivery and installation, but not including reaming	m	100		
10.14	10.4.2.3	i) Steel casing (plain), 165 mm (state wall thickness here as 3 mm)	m	—		
10.15	10.4.2.4	ii) Steel casing (slotted), 165 mm (state wall thickness here as 4 mm)	m	100		
	10.4.3	SITE FINISHING				
10.16	10.4.3.1	a) Borehole finishing, rate to include borehole disinfection, concrete collar in Grade 20Mpa concrete, normal saintary seal, borehole making	Sum	1		
	10.4.4	BOREHOLE TESTING				
		Site Establishment/De-establishment				
10.16	10.4.4.1	a) Mobilisation and set up of plant to/at first borehole. Rate to include inter-borehole moves and de-establishment from Site, of the gigen drilling batch	Sum	1		
	10.4.5	PUMP TESTING OF BOREHOLE				
10.17	10.4.5.1	a) Rate to include the following: installation of pump testing equipment and removal after, calibration testing, 24hr constant discharge testing, recovery measurements, data recording and reporting.	Sum	1		
10.18	10.4.5.1	b) Sampling for water quality testing	Sum	1		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX			SCHEDULE OF QUANTITIES			
Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	10.4.5	ELEVATED 3 X 10KL JOJO TANKS				
		Complete 4m above ground steel structure including concrete footings, concrete slab, jojo tanks and all the fittings.				
10.19	10.4.5.1	Allow for supply, installation and commissioning	Prov. Sum	1,00	R 250 000,00	R250 000,00
10.20	10.4.5.1	Percentage mark-up on item 10.19	%			
10.21	10.4.5.1	8m x 4m 150mm thick	m ³	-		R/Only
10.22	10.4.5.2	Reinforcing steel Y10 @ spacings	kg	-		R/Only
10.23	10.4.5.3	Formwork to edges of slab	m ²	-		R/Only
10.24	10.4.5.4	Wood shamfers	m	-		R/Only
	10.4.6	25mpa Concrete Slab for JoJo Tank				
10.25	10.4.6.1	8m x 4m 150mm thick	m ³	-		R/Only
10.26	10.4.6.2	Reinforcing steel Y10 @ spacings	kg	-		R/Only
10.27	10.4.6.3	Formwork to edges of slab	m ²	-		R/Only
10.28	10.4.6.4	Wood shamfers	m	-		R/Only
	10.4.7	Booster Pump				
10.29	10.4.7.1	Booster pump multistage automatic 1.1KW	No	-		R/Only
	10.4.8	Electricity Supply				
10.30	10.4.8.1	a) Supply material and erect a three phase electricity power line to the new borehole	Prov Sum	1,00	65 000,00	R 65 000,00
10.31	10.4.8.2	b) Mark-up on item 10.30	%			
10.32	10.4.8.3	c) Supply all material and install a 25kVa transformer	Prov Sum	1,00	30 000,00	R 30 000,00
10.33	10.4.8	COC Certificate After commissioning	Sum	1.00		
		Note: Price to incl. for supply, installation, commissioning and wiring of CCG boxes as well as the materials used and labour for the connection to existing DB or Kiosk.				
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX			SCHEDULE OF QUANTITIES			
Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	SABS 1200L	MEDIUM PRESSURE PIPELINES Supplying, laying and jointing of water pipes on bedding as shown (including testing and sterilizing /disinfecting) irrespective of depth:				
	PSL 10.4.9	Class 6 uPVC pipes, SABS 966: 1998 Part 1 (uPVC)				
10.34	10.4.9.1	110mm	m	750		
10.35	10.4.9.2	160mm	m	—		
	10.4.10	SPECIALS AND FITTINGS				
		SUPPLY, LAY, BED, AND JOINT ALL THE PIPE SPECIALS				
		EXTRA OVER ITEM FOR THE SUPPLY, INSTALLATION, TESTING OF THE FOLLOWING FITTINGS				
10.36	10.4.10.1	110mm dia., 22.5 deg. Bend	No.	1		
10.37	10.4.10.2	110mm dia., 45 deg. Bend	No.	3		
10.38	10.4.10.3	110mm dia., 90 deg. Bend	No.	—		
10.39	10.4.10.4	160mm dia., 22.5 deg. Bend	No.	—		
10.40	10.4.10.5	160mm dia., 45 deg. Bend	No.	—		
10.41	10.4.10.6	160mm dia., 90 deg. Bend	No.	—		
		Galvanised mild steel, medium class pipes, including all fittings and couplings:				
10.42	10.4.10.7	a) 80 mm dia	m	—		
10.43	10.4.10.8	b) 100 mm dia	m	6		
		GMS pipes - 90° Bends:				
10.44	10.4.10.9	a) 80 mm dia	No	—		
10.45	10.4.10.10	b) 100 mm dia	No	2		
		GMS screwed flanges (including bolts nuts and gasket):				
10.46	10.4.10.11	a) 80 mm dia	No	—		
10.47	10.4.10.12	b) 100 mm dia	No	2		
		GMS Sockets				
10.48	10.4.10.13	a) 80 mm dia	No	—		
10.49	10.4.10.14	b) 100 mm dia	No	1		
		Cast iron reducers for uPVC pipes:				
10.50	10.4.10.15	160 mm X110mm dia	No	—		
		Supply and install Saddles:				
10.51	10.4.10.16	a) 110mm X 20mm dia	No	5		
10.52	10.4.10.17	a) 110mm X 32mm dia	No	2		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
10.53	10.4.10.18	Supply and install HDPE Type IV Class 12 Erf Connections and standtaps, complete with bends, fittings and valves a) 20 mm dia. Single long erf connection (15m max.)	No	6		
10.54	10.4.10.19	b) Stand tap, complete (with HDPE piping from meter to stand tap)	No	5		
10.55	10.4.10.20	c) Communal standtap complete	No	7		
		ISOLATING VALVES (GATE VALVE)				
		Socket, anti-clockwise closing "RSV" valves to fit uPVC pipes:				
10.56	10.4.10.21	a) 110 mm	No	3		
10.57	10.4.10.22	b) 160 mm	No	—		
	10.4.11	VALVE CHAMBERS				
10.58	10.4.11.1	Precast concrete valve box	No	5		
10.59	10.4.11.2	Flow meter complete(Pillar type meter box complete with Class C 15mm)	No	—		
	10.4.12	ANCHOR/THRUST BLOCKS AND PEDESTAL (SBS 1200L)				
10.60	10.4.12.1	a) Providing thrust blocks using class 15/19 concrete	m³	1,8		
	10.4.13	METERS				
10.61	10.4.13.1	Supply and install Water Meters (Sensus multi-jet water meter in econo-box) or similar approved	No	1		
	SABS 1200 LD & PSLD	SEWERS PIPEWORK				
10.62	10.4.14	Supply, lay, bed, & test Type 4 HDPE Class sewer pipes with butt weld joints 200 mm diameter	m	250		
	10.4.14	MANHOLES				
10.63	10.4.14.1	1200 dia. HDPE Manholes complete with Type 4A CI cover and frame, for depths over and up to 2.0 m - 3,0 m	No.	3		
10.64	10.4.14.2	Septic tank & portable toilet connection to sewer-line	Sum	1		
	10.5	STORMWATER				
	10.5.1	DUCTS AND CHANNELS				
10.65	10.5.1.1	Excavate, compact and construct duct complete using 30/19 concrete, inclusive of rectangular grating, angle irons and anchors	m	—		
10.66	10.5.1.2	Excavate, compact and construct channel (1.2m, 150mm deep) complete using 25/19 concrete, inclusive of mesh Ref. 395	m	1200		R/Only
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		Total Brought Forward				R
	10.6	ELEVATED TANK (JoJo)				
10.67	SABS 1200C 10.6.1	Site Clearance Clear and grub	m ²	50		
	SABS 1200DA	Earthworks (Small Works)				
10.68	10.6.2	Excavation;	m ²	24		
10.69	10.6.2.1	a) Remove topsoil to a nominal depth of 150mm, stockpile and maintain	m ³	—		
	10.6.2.2	b) Excavate in all material to 45 degree slopes, temporarily stockpiling and final disposal to approved spoil site	m ³	—		
		c) Extra over for	m ³	1		
10.70	10.6.2.3	1) Intermediate Excavation	m ³	—		
10.71	10.6.2.4	2) Hard rock Excavation	m ³	—		
10.72	10.6.2.5	3) Boulder Excavation Class A	m ³	—		
10.73	10.6.2.6	4) Boulder Excavation Class B	m ³	—		
10.74	10.6.2.7	Rip, Scarify, wet and compact the exposed ground surface to a depth of 150mm	m ³	7,5		
10.75	10.6.2.8	Restricted Excavation a) Excavate for restricted foundations, footings and trenches in all materials and dispose	m ³	1		
10.76	10.6.2.9	Topsoil	m ³	24		
	SABS 1200DB	Earthworks(PIPE TRENCHING)				
10.77	PSDB 10.6.3	Import from borrow pits sourced by the contractor, approved by the engineer, place and compact in 200mm layers to 95 % mod ASSHTO (material to be G5 quality or better)	m ²	—		
	SABS 1200DM	Earthworks (ROADS, SUBGRADE)				
10.78	10.6.3.1	Import from borrow pits sourced by the contractor and approved by the engineer, place and compact in 200mm layers to 95 % mod ASSHTO (material to be G5 quality or better)	m ²	—		
10.95	PSG 10.6.4	High-tensile welded mesh Ref 193	m ²	50		
	SABS 1200G 10.6.5	CONCRETE (STRUCTURAL) SCHEDULED CONCRETE ITEMS Supply and install:				
10.97	10.6.5.1	Strength Concrete Supply and install Grade 25/19 in tank: i) Footings	m ³	1,5		
10.98	10.6.5.2	Unformed surface finishes b) Steel-floated finish top of footings	m ²	50		
		Total Carried Forward				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		SCHEDULE 11: ROADS & PARKING				
11.1	SABS 1200C 11.1	SITE CLEARANCE Clear and grub areas for road construction(Covered in Item 2.1)	m ²	—		
11.2	SABS 1200DM 11.1.1	EARTHWORKS Remove topsoil 150mm deep to stockpile and maintain(Covered in Item 2.1)	m ²	—		
11.3	11.1.2	Excavate in all materials, select and stockpile or place on road for gravel wearing course or sub-grade formation	m ²	150		
11.4	11.1.3	Excavate in all materials and spoil	m ³	150		
11.5	11.1.4	Extra over items for Item 8.2.1 to 8.2.3 for excavations in hard rock material	m ³	150		R/Only
11.6	11.2 11.2.1	FILL OF SUBGRADE Compact to 90% Mod. AASHTO max. density	m ³	150		
11.7	11.3 11.3.1	TREATMENT OF ROAD-BED Subgrade: rip in-situ material to 150mm depth, moisten and compact to 93% Mod. AASHTO density	m ³	150		
11.8	1200ME 11.3.2	SUB-BASE (95% MOD.AASHTO DENSITY) CONSTRUCT GRAVEL (G5) SUBBASE WITH MATERIAL FROM DESIGNATED EXCAVATIONS Construct sub-base with material from stockpile	m ³	—		
11.9	11.3.3	Construct sub-base with material placed on road	m ³	—		
11.10	11.3.4	Construct sub-base with material from borrow pits within a radius of 1,5km	m ³	150		
11.11	1200MF 11.3.5	BASE (98% MOD.AASHTO DENSITY) Construct base with gravel (G4) material from stockpile	m ³	—		
11.12	11.3.6	Construct base with (G4) material from borrow pits within a radius of 1,5km	m ³	—		
11.13	11.3.7	Process by means of stabilisation	m ³	—		
11.14	11.3.8	Stabilising agent: Portland blast furnace cement (3%)	t	5		
11.15	11.4 11.4.1	OVERHAUL Extra over Items 8.1.1 to 8.6.2 for hauling material in excess of 1,5km	m ³ km	10		
11.16	11.4.2	CONSTRUCTION OF PAVING WITH 80mm THICK CONCRETE BLOCKS INCLUDING 25mm SANDBED COMPLETE (PROVISIONAL) Horizontal (including excavations and trimming)	m ²	—		
11.17	11.4.3	Extra over item 3.10.1 for provision and installation of edge restraints consisting of kerbing as per SABS Fig. 12	m	—		
		TOTAL CARRIED FORWARD TO SUMMARY				R

MATLEREKENG SPORT COMPLEX**SCHEDULE OF QUANTITIES**

Item No.	Payment Refers	Description	Unit	Qty	Tendered	
					Rate	Amount
		<u>SCHEDULE 12: FENCING</u>				
	12.1	CONCRETE PALISADE				
12.1	12.1.1	Supply and install Concrete Palisade.	m	1260		
12.2	12.1.2	Supply & install concrete posts for Item 12.1.1(Covered in item 12.1.1)	No.	805		
		Gates				
12.3	12.1.3	Supply & install sliding gate 6m complete with gate posts	No	3		
12.4	12.1.4	Supply & install pedestrian gate 1.2m complete with gate posts	No	1		
		25MPa/19mm concrete				
12.5	12.1.5	Supply & install concrete bases for posts	m ³	60		
12.6	12.1.6	Supply & install fence foundation	m ³	—		
		TOTAL CARRIED FORWARD TO SUMMARY				R

SUMMARY		
SCHEDULE	DESCRIPTION	AMOUNT
1	PRELIMINARY AND GENERAL	R
2	SITE PREPARATION, TERRACING, PAVING AND LANDSCAPING	R
3	FOUNDATIONS	R -
4	STRUCTURAL STEELWORK	R -
5	BUILDING WORKS : SOCCER/RUGBY FIELD(CHANGE ROOMS)	R
6	BUILDING WORKS : PUBLIC ABLUTION FACILITIES	R
7	BUILDING WORKS : GUARD HOUSE	R
8	SOCCER/RUGBY FIELD AND TRACK : EARTHWORKS	R
9	COMBI-COURTS	R
10	WATER/SEWER/STORMWATER	R
11	ROADS & PARKING	R
12	FENCING	R
SUB-TOTAL		R
ADD 5% CONTINGENCIES		R
SUB-TOTAL		R
ADD: 15% VAT		R
TENDER (CONTRACT) PRICE TO FORM OF OFFER		R

NB. NOT ALL PRICED ITEMS WILL BE IMPLEMENTED

SIGNED ON BEHALF OF TENDERER..... DATE.....

EPHRAIM MOGALE LOCAL MUNICIPALITY CONSTRUCTION OF MATLEREKENG SPORTS FACILITY

C3: SCOPE OF WORK

Table of Contents:

C3.1 STANDARD SPECIFICATIONS

C3.2 PROJECT SPECIFICATIONS

PART A: GENERAL

PS-1	Project Description
PS-2	Description of the Site and Access
PS-3	Details of the Works
PS-4	Construction Management Requirements
PS-5	Expanded Public Works Programme (EPWP) labour intensive specification.

C3.3 PARTICULAR SPECIFICATIONS

SECTION EMP: ENVIRONMENTAL MANAGEMENT SPECIFICATION

1. General
2. Training and Induction of Employees
3. Complaints Register and Environmental Incident Book
4. Site Cleanliness and Neatness
5. Access
6. Borrow Pits
7. Dust Control / Air Quality
8. Fauna
9. Fire Prevention and Control
10. Grave Sites
11. Materials Handling and Spills Management
12. Noise
13. Pollution Control
14. Rivers and Streams
15. Safety
16. Soil Management
17. Worker Conduct
18. Traffic Disturbances and Diversions
19. Vegetation
20. Waste Management

SECTION DWK: DAYWORKS

1. Scope
2. Type of Work
3. Materials
4. Construction Plant Hire
5. Salaries and Wages of Workmen
6. Measurement and Payment

SECTION OHS: PRE-CONSTRUCTION HEALTH AND SAFETY SPECIFICATION

1. Introduction and Background
2. Pre-construction Health and Safety specification
 - 2.1 Scope

- 2.2 Interpretations
- 2.3 Minimum Administrative requirements
- 2.4 Health and Safety Induction, Training and Equipment
- 2.5 Preliminary Hazard Identification and Risk Assessment
- 2.6 Permits
- 2.7 Incentives and Penalties
- 2.8 Specific Project Requirements
- 3. Financial Provision for Health and Safety
- 4. Guidelines for the preparation of a Typical OH&S Plan

ETENDER

EPHRAIM MOGALE LOCAL MUNICIPALITY CONSTRUCTION OF MATLEREKENG SPORTS FACILITY

C3.2: PROJECT SPECIFICATIONS

STATUS

The Project Specification, consisting of two parts, forms an integral part of the contract and supplements the Standard Specifications.

Part A contains a general description of the works, the site and the requirements to be met.

Part B contains variations, amendments and additions to the Standardized Specifications and, if applicable, the Particular Specifications.

In the event of any discrepancy between a part or parts of the Standardized or Particular Specifications and the Project Specification, the Project Specification shall take precedence. In the event of a discrepancy between the Specifications, (including the Project Specifications) and the drawings and / or the Bill of Quantities, the discrepancy shall be resolved by the Engineer before the execution of the work under the relevant item.

The standard specifications which form part of this contract have been written to cover all phases of work normally required for electrical distribution contracts, and they may therefore cover items not applicable to this particular contract.

PART A: GENERAL

PS-1 PROJECT DESCRIPTION

The Ephraim Mogale Local Municipality needs to Construction Of Matlerekeng Sports Facility. The works will comprise of the following:

Construction works:

- Clearing and grubbing
- Bulk earthworks
- Construction of soccer field with irrigation system and gravel athletic track
- Construction of ablution, change room and guard house
- Construction of combi courts
- Electrical Supply-
- Septic tank, water supply and reticulation
- Fence

SPECIFICATION FOR CONSTRUCTION OF THE COURTS

BASE

- Apply a course of G1/G5 Layer (200mm) Spray with Bitumen SS60 emulsion and roll with double Vibratory roller.
- Apply A course of 13.2mm Crusher Stone to the surface spray with Bitumen SS60 emulsion and roll with double Vibratory roller.
- Apply A course of 6.7 mm Crusher Stone to the surface, Spray with Bitumen SS60 emulsion and roll with double Vibratory roller.

SURFACE

- Apply by squeeze 4x Layers of Barramastic (slurry) prime Coat (Plaster+Cement+Bitumen SS60 +Dm4 Court)
- Check the lower spots where there is water ponding and fix to the correct level prior application of slurry.
- Apply by squeeze 1x Layers of Tac/Clear Coat slurry before the colour coats for the purpose of strengthening the new slurry on the court surface.
- Apply by squeeze 3x Layers of Barracode Green (court green layer slurry) in the playing area

3.1 Roadwork's

Reconstruct layer works and compact to each layer specifications

3.2 Structures

No major structure was identified.

3.6 Climatic conditions**Temperature:**

The climatic conditions of the local steppe have a significant impact on Marble Hall. Throughout the year, precipitation is minimal. The mean temperature prevailing in the city of Marble Hall is recorded as 20.6 °C | 69.0 °F, according to statistical data. In a year, the rainfall is 471 mm | 18.5 inch. This location is situated in the southern region of the globe. The commencement of summer is observed at the conclusion of January and its culmination takes place in December. During July, the amount of precipitation is at its lowest, with only 3 mm | 0.1 inch recorded. The highest amount of precipitation occurs during the month of January, with an average quantity reaching up to 85 mm | 3.3 inch. The month of maximum warmth in a year is February. The average temperature during this period reaches up to 24.8 °C | 76.7 °F, making it the hottest time of the year. The month of July registers the most frigid temperatures throughout the year, with an average low temperature of 13.7 °C | 56.7 °F..

Rainfall:

The average rainfall up to 2021 is 471mm/year

3.7 Labour recruitment conditions

Local labour is to be used and the employment should be according to EPWP guidelines. A Community liaison officer (C.L.O.) must be appointed (which shall be remunerated under the contract. Remuneration must at least be R4 500/month). The CLO shall be in full time employ of the contract. The duties of the C.L.O. shall consist inter alia of the following:

- To be available on site daily between the hour of 07:00 and 17:00 and at other times as the need arises. His normal working day will extend from 07:00 in the morning until 17:00 in the afternoon.
- To communicate daily with regard to number and skills, to facilitate in labour disputes and to assist in their resolution.
- To attend all meetings in which the community and/or labour are present or are required to be represented.
- To attend all project meetings to report on labour.
- To assist in the identification and screening of laborers from the community in accordance with the contractor's requirements.
- To advise and inform temporary laborers of their conditions of employment and to inform

temporary laborers as early as possible when their period of employment will be terminated.

- To attend disciplinary proceedings to ensure that hearings are fair and reasonable.
- To keep a daily written record of his interviews and community liaison, labour force etc.
- To attend monthly site meetings and report in writing on labour and contract matters.
- Keeping a data base of available labour.
- All such other duties as agreed upon between all parties concerned.
- Compile a list of available skills in the area (skills audit).

4.11 Construction in confined Areas

It may be necessary for the Contractor to work within confined areas. Except where provided for in the specifications, no additional payment shall be made for work done in restricted areas. In certain places the width of the fill material and pavement layers may decrease to zero and the working space may be confined. The method of construction in these confined areas largely depends on the Contractor's constructional plant.

However, the Contractor shall note that, unless provided for in terms of the scheduled payment items in the COLTO Standard Specifications or these project specifications, measurement and payment shall be in accordance with the specified cross sections and dimensions only, irrespective of the method used for achieving these cross sections and dimensions, and that the Bided rates and amounts shall include full compensation for all special equipment and construction methods and for all difficulties encountered when working in confined areas and narrow widths, and at or around obstructions, and that no extra payment shall be made nor shall any claim for additional payment be considered in such cases.

PS-4 CONSTRUCTION AND MANAGEMENT REQUIREMENTS

4.1 General

The Contractor is referred to **SANS 1921: 2004 parts 1, 2 and 3: Construction and Management Requirements for Works Contracts**. These specifications shall be applicable to the contract under consideration and the Contractor shall comply with all requirements relevant to the project.

Certain aspects however require further attention as described hereafter.

4.2 Drawings (Read with SANS 1921 – 1: 2004 clauses 4.1.7; 4.1.11 and 4.1.12)

The reduced drawings which form part of the Bid documents shall be used for Biding purposes only and is attached at the back of this document under section C4.3.

The contractor shall be supplied with three complete paper copies of the construction drawings free of charge. The Contractor shall at his own expense re-produce further paper prints required for the construction of the work.

At the completion of the Contract, the Contractor shall return to the Engineer all drawings, provided or made, during the contract period.

Any information which the Contractor has control over and which is required by the Resident Engineer to complete the as-built drawings shall be made available to the Resident Engineer before the Certificate of Completion is issued.

Only written dimensions may be used. Dimensions are not to be scaled from drawings unless ordered by the Engineer. The Engineer will supply all figures / dimensions which are not shown on the drawings. The levels or dimensions given on the drawings are subject to confirmation on site. The Contractor shall submit all levels and dimensions to the Engineer for confirmation before he commences with any structural construction work. The Contractor shall also check all clearances which are given on the drawings and inform the Engineer of any conflicting dimensions.

Any destination names on road signs which may be indicated on the drawings are subject to confirmation by the Engineer before these signs are manufactured.

4.3 Responsibilities for design and construction *(Read with SANS 1921 – 1:2004 Clause 4.2)*

4.3.1 The responsibility strategy followed in this contract shall be A.

4.3.2 The Municipality is responsible for the design.

4.4 Planning, Programme and Method Statements *(Read with SANS1921-1:2004 clause 4.3)*

4.4.1 Preliminary programme

The Contractor shall include with his Bid a programme in the form of a simplified bar chart with sufficient details to show clearly how the works will be performed within the time for completion as stated in the Contract Data.

The Contractor shall be deemed to have allowed fully in his Bided rates and prices as well as in his programme for all possible delays due to normal adverse weather conditions and special non-working days as specified in the Special Conditions of Contract, in the Project Specifications and in the Contract Data.

The following constraints shall be taken into account in preparing the preliminary construction programme which must be submitted with the Bid. These same constraints shall apply to the final construction programme.

- a) The Contract will be as Bided by the contractor. Plant and personnel requirements to complete the project must be incorporated in the Bid and shown on the programme.
- b) A high standard of traffic accommodation
- c) The relocation of services
- d) Ancillary works by Emerging Contractors

4.4.2 Programme in terms of Clause 5.6 of the General Conditions of Contract

It is essential that the construction programme, which shall conform in all respects to Clause 5.6 of the General Conditions of Contract, be furnished within the time stated in the Contract Data. The preliminary programme to be submitted with the Bid shall be used as basis for this programme..

The following must be stated on the programme:

- (a) 2 weeks must be allocated at the start of the project for the setting out of existing services and confirmation of such services. No work will be allowed prior to the confirmation process being completed.
- (b) The quantity of work applicable to each bar item as well as the rate at which the work will be completed.
- (c) A budget of the value of completed work, month by month, for the full contract period.
- (d) The critical path.
- (e) Work to be undertaken by Local Contractor (if applicable)
- (f) Schedule of plant and recourses to be utilized

The Contractor's attention is also drawn to clause 5.7 of the General Conditions of Contract 2010.

4.4.3 Time for Completion

The Time for Completion shall be **09 months** as indicated under section C1.2. Contract Data.

4.4.4 Delay in Completion

The Contractor shall organise the Works in such a manner that no delays occur. Delays due

to faulty organisation or lack or shortage of materials or labour or co-operation with other parties or to any other cause within the control of the Contractor will not be counted and full power is reserved by the Engineer to order the Contractor to expedite the work should the work, in the opinion of the Engineer, not progress in a satisfactory way.

4.5 Quality Assurance (QA) *(Read with SANS 1921 – 1: 2004 clause 4.4)*

The Contractor will be solely responsible for the production of work that complies with the Specifications to the satisfaction of the Engineer. To this end it will be the full responsibility of the Contractor to institute an appropriate Quality Assurance (QA) system on site. The Engineer will audit the Contractor's quality assurance (QA) system on a regular basis to verify that adequate independent checks and tests are being carried out and to ensure that the Contractor's own control is sufficient to identify any possible quality problems which could cause a delay or failure.

The Contractor shall ensure that efficient supervisory staff, the required transport, instruments, equipment and tools are available to control the quality of his own workmanship in accordance with his QA-system. His attention is drawn to the fact that it is not the duty of the Engineer or the Engineer's representative to act as foreman or surveyor.

4.6 Management and disposal of water *(Read with SANS 1921 – 1 : 2004 clause 4.6)*

The Contractor shall pay special attention to the management and disposal of water and storm water on the site. It is essential that all completed works or parts thereof are kept dry and properly drained. Claims for delay and for repair of damage caused to the works as a result of the Contractor's failure to properly manage rain and surface water, will not be considered.

4.7 Earthworks *(Read with SANS 1921 – 1 : 2004 clause 4.10)*

4.7.1 Borrow pits and spoil areas

The borrow pits to be used for this contract shall be pointed out at the Site Inspection. The Contractor shall be permitted to use only those borrow pits approved by the Engineer.

The spoil sites shall be determined on site in conjunction with the Engineer, the PSC, and the local communities. The Contractor shall be permitted to use only those spoil areas approved by the Engineer.

Should the Contractor wish to use any other spoil area for the disposal of soil, rubble, vegetation, etc, its use shall be subject to the approval of the Engineer and the landowner.

4.8 Testing

Testing according to SANS 10198 – 13 with certification.

4.8.1 Process control

The Contractor shall arrange for his own process control.

4.8.2 Acceptance control

The Contractor will submit the proof that material complies with SABS standards as well as the test certificates for the cable joints and termination.

4.9 Site Establishment *(Read with SANS 1921 – 1 : 2004 clause 4.14)*

4.9.1 Contractor's camp site and depot

The Contractor is responsible to provide a suitable site for his camp and to provide accommodation for his personnel and laborers. If the Employer can make any specific site available to the Contractor, such site will be pointed out to the Contractor.

Possible locations for a campsite shall be pointed out at the Site inspection. The Contractor

shall conform to all local authority, environmental and industrial regulations.

The Contractor shall make his own arrangements concerning the supply of electrical power and all other services. No direct payment shall be made for the provision of electrical and other services. The cost thereof shall be deemed to be included in the rates and amounts Bided for the various items of work for which these services are required.

The Contractor shall provide security watchmen for the contract as he deems fit at no extra cost for the Employer. The Contractor must ensure that all his employees as well as the employees of his subcontractors are able to identify themselves as members of the construction team.

4.9.2 Accommodation of Employees

No employees except for security guards will be allowed to sleep or be accommodated on the site in urban areas.

No housing is available for the Contractor's employees and the Contractor shall make his own arrangements to house his employees and to transport them to site.

No informal housing or squatting will be allowed.

The Contractor shall provide the necessary ablution facilities at his camp site and the site of the works for the use of his employees. Chemical toilets will only be allowed where temporary facilities have to be provided.

4.10 Survey beacons *(Read with SANS 1921 – 1 : 2004 clause 4.15)*

The Contractor shall take special precautions to protect all permanent survey beacons or pegs such as bench-marks, stand boundary pegs and trigonometrical beacons, regardless whether such beacons or pegs were placed before or during the execution of the Contract. If any such beacons or pegs have been disturbed by the Contractor or his employees, the Contractor shall have them replaced by a registered land surveyor at his own cost.

4.11 Existing Services *(Read with SANS 1921 – 1: 2004 clause 4.17)*

The Contractor shall make himself acquainted with the position of all existing services before any excavation or other work likely to affect the existing services is commenced. It is the contractors responsibility to identified services that will interact with the construction work. The contractor will be responsible to do the application and negotiation on the relocation of the sifting of services.

The Contractor will be held responsible for any damage to known existing services caused by or arising out of his operations and any damage shall be made good at his own expense. Damage to unknown services shall be repaired as soon as possible and liability shall be determined on site when such damage should occur.

Services belonging to the following service owners will be encountered.

SERVICE OWNER	TYPE OF SERVICE
Ephraim Mogale Local Municipality	Electrical cables
Telkom(Open Serve)	Telephone lines and Cables
Sekhukhune District Municipality	Waterlines and sewer reticulation
Sekhukhune District Municipality	Bulk water lines
Ephraim Mogale Local Municipality	Land owner
SANRAL	Road N11 and road reserve
Ephraim Mogale Local Municipality	Ewoud Malan and Industria Streeta
Private owners	Fence line

A provisional amount is included in the bill of quantities for the protection and/or shifting of services.

Two weeks prior to commencing construction activities in a particular area, the Contractor shall also diligently enquire of local landowners as to whether there are any other known services which have not been shown on the drawings but which may be affected by the construction activities in that area, and any such services shall be brought to the attention of the Engineer immediately. The contractor shall make provision in his programme for the location and/or shifting of services.

The Contractor shall take note of the requirements of clause 1202 of the standard specifications with regard to services.

4.12 Health and Safety *(Read with SANS 1921 - 1: 2004 clause 4.18)*

4.12.1 General statement

It is a requirement of this contract that the Contractor shall provide a safe and healthy working environment and to direct all his activities in such a manner that his employees and any other persons, who may be directly affected by his activities, are not exposed to hazards to their health and safety. To this end the Contractor shall assume full responsibility to conform to all the provisions of the Occupational Health and Safety Act (OHSA) No 85 and Amendment Act No 181 of 1993, and the OHSA 1993 Construction Regulations 2014 issued on 7 February 2014 by the Department of Labour.

For the purpose of this contract the Contractor is required to confirm his status as mandatory and employer in his own right for the execution of the contract by entering into an agreement with the Employer in terms of the Occupational Health and Safety Act in the form as included in section C1.5.

4.12.2 Health and Safety Specifications and Plans

(a) Employer's Health and Safety Specification

The Employer's Health and Safety Specification is included in Section C3.3, of the Bid documents as part of the Particular Specifications.

(b) Bidder's Health and Safety Plan

The Bidder shall submit with the bid his own documented Health and Safety Plan he proposes to be implement for the execution of the work under the contract. The Health and Safety Plan must at least cover the following:

- (i) a proper risk assessment of the works, risk items, work methods and procedures in terms of Regulations 9 to 30;
- (ii) pro-active identification of potential hazards and unsafe working conditions;
- (iii) provision of a safe working environment and equipment;
- (iv) statements of methods to ensure the health and safety of subcontractors, employees and visitors to the site, including safety training in hazards and risk areas (*Regulation 7*);
- (v) monitoring health and safety on the site of works on a regular basis, and keeping of records and registers as provided for in the Construction Regulations;
- (vi) details of the Construction Supervisor, the Construction Safety Officers and other competent persons he intends to appoint for the construction works in terms of Regulation 8 and other applicable regulations; and
- (vii) details of methods to ensure that his Health and Safety Plan is carried out effectively in accordance with the Construction Regulations 2014.

The Contractor's Health and Safety Plan will be subject to approval by the Employer, or amendment if necessary, before commencement of construction work. The Contractor will not be allowed to commence work, or his work will be suspended if he had already commenced work, before he has obtained the Employer's written approval of his Health and Safety Plan.

Time lost due to delayed commencement or suspension of the work as a result of the Contractor's failure to obtain approval for his safety plan, shall not be used as a reason to claim for extension of time or standing time and related costs

4.12.3 Cost of compliance with the OHSA Construction Regulations

The rates and prices Bided by the Contractor shall be deemed to include all costs for conforming to the requirements of the Act, the Construction Regulations and the Employer's Health and Safety Specification as applicable to this contract.

Should the Contractor fail to comply with the provisions of the Construction Regulations, he will be liable for penalties as provided in the Construction Regulations and in the Employer's Health and Safety Specification.

4.13 Requirements for Accommodation of Traffic (*Read with SANS 1921 - 2 : 2004*)

4.13.1 General

The Contractor will be responsible for the safe and easy passage of public traffic past and on sections of roads of which he has occupation or where work has to be done near traffic. The travelling public shall have the right of way on public roads, and the Contractor shall make use of approved methods to control the movement of his equipment and vehicles so as not to constitute a hazard on the road.

Accommodation of traffic, where applicable shall comply with SANS 1921-2: 2004: Construction and Management Requirements for Works Contracts, Part 2: Accommodation of Traffic on Public Roads occupied by the Contractor. The Contractor shall obtain this specification from Standards South Africa if accommodation of traffic will be involved on any part of the construction works.

4.13.2 Basic Requirements

The travelling public shall have the right of way on public roads, and the Contractor shall make use of approved methods to control the movement of his equipment and vehicles so as not to constitute a hazard on the road.

The Contractor shall ensure that all road signs, barricades, delineators, flagmen and speed controls are effective and that courtesy is extended to the public at all times.

Failure to maintain road signs, warning signs or flicker lights, etc, in a good condition shall constitute ample reason for the Engineer to suspend the work until the road signs, etc, have been repaired to his satisfaction.

The Contractor may not commence constructional activities affecting existing roads before adequate provision has been made to accommodate traffic in accordance with the requirements of this document and the South African Road Traffic Signs Manual.

The Contractor shall construct and maintain all temporary drainage works necessary for temporary deviations.

The Contractor shall provide and grant access to persons whose properties fall within or adjoin the area in which he is working.

4.13.3 Payment

The Contractor's Bided rates for the relevant items in the Bill of Quantities shall include full compensation for all possible additional costs which may arise from this, and no claims for extra payment due to inconvenience as a result of the modus operandi will be considered.

4.14 Management of the environment *(Read with SANS 1921 - 1 : 2004 clause 4.19)*

Respect for the environment is an important aspect of this contract and the Contractor shall pay special attention to the following:

4.14.1 Natural Vegetation

The Contractor shall confine his operation to the limits of the road reserve for the purpose of constructing the works and where applicable detours, shall be sited in consultation with the Engineer and the local communities.

Only those trees and shrubs directly affected by the works and such others as the Engineer may direct in writing shall be cut down and stumped. The natural vegetation, grassing and other plants shall not be disturbed other than in areas where it is essential for the execution of the work or where directed by the Engineer.

4.14.2 Fires

The Contractor shall comply with the statutory and local fire regulations. He shall also take all necessary precautions to prevent any fires. In the event of fire the Contractor shall take active steps to limit and extinguish the fire and shall accept full responsibility for damages and claims resulting from such fires which may have been caused by him or his employees.

4.14.3 Environmental Management Plan

In addition to the above all requirements according to the Environmental Management Plan as detailed in C3.3, Particular Specifications, will be adhered to.

PS-5 Expanded Public Works Programme (EPWP) labour intensive specification

5.1. Labour Regulations

5.1.1 Payment for the labour-intensive component of the works

Payment for works identified in the Project Specifications as being labour-intensive shall only be made in accordance with the provisions of the Contract if the works are constructed strictly in accordance with the provisions of the scope of work. Any non-payment for such works shall not relieve the Contractor in any way from his obligations either in contract or in delict.

5.1.2 Applicable labour laws

The Ministerial Determination for Special Public Works Programmes, issued in terms of the Basic Conditions of Employment Act of 1997 by the Minister of Labour in Government Notice N° R347 of 4 May 2012, as reproduced below, shall apply to works described in the scope of work as being labour.

5.1.3 Introduction

This document contains the standard terms and conditions for workers employed in elementary occupations on a project (EPWP). These terms and conditions do NOT apply to persons employed in the supervision and management of a EPWP.

In this document –

- (a) "department" means any department of the State, implementing agent or contractor;
- (b) "employer" means any department, implementing agency or contractor that hires workers

to work in

elementary occupations on a EPWP;

- (c) “worker” means any person working in an elementary occupation on a EPWP;
- (d) “elementary occupation” means any occupation involving unskilled or semi-skilled work;
- (e) “management” means any person employed by a department or implementing agency to administer or execute an EPWP;
- (f) “task” means a fixed quantity of work;
- (g) “task-based work” means work in which a worker is paid a fixed rate for performing a task;
- (h) “task-rated worker” means a worker paid on the basis of the number of tasks completed;
- (i) “time-rated worker” means a worker paid on the basis of the length of time worked.

5.1.4 Terms of Work

5.1.4.1 Workers on a EPWP are employed on a temporary basis or Contract Basis

5.1.5 Normal Hours of Work

5.1.5.1 An employer may not set tasks or hours of work that require a worker to work–

- (a) more than forty hours in any week
- (b) on more than five days in any week; and
- (c) for more than eight hours on any day.

5.1.5.2 An employer and worker may agree that a worker will work four days per week. The worker may then work up to ten hours per day.

5.1.5.3 A task-rated worker may not work more than a total of 55 hours in any week to complete the tasks allocated (based on a 40-hour week) to that worker.

5.1.6 Meal Breaks

5.1.6.1 A worker may not work for more than five hours without taking a meal break of at least thirty minutes duration.

5.1.6.2 An employer and worker may agree on longer meal breaks.

5.1.6.3 A worker may not work during a meal break. However, an employer may require a worker to perform duties during a meal break if those duties cannot be left unattended and cannot be performed by another worker. An employer must take reasonable steps to ensure that a worker is relieved of his or her duties during the meal break.

5.1.6.4 A worker is not entitled to payment for the period of a meal break. However, a worker who is paid on the basis of time worked must be paid if the worker is required to work or to be available for work during the meal break.

5.1.7 Special Conditions for Security Guards

5.1.7.1 A security guard may work up to 55 hours per week and up to eleven hours per day.

5.1.7.2 A security guard who works more than ten hours per day must have a meal break of at least one hour

or two breaks of at least 30 minutes each.

5.1.8 Daily Rest Period

Every worker is entitled to a daily rest period of at least eight consecutive hours. The daily rest period is measured from the time the worker ends work on one day until the time the worker starts work on the next day.

5.1.9 Weekly Rest Period

Every worker must have two days off every week. A worker may only work on their day off to perform work which must be done without delay and cannot be performed by workers during their ordinary hours of work ("emergency work").

5.1.10 Sick Leave

5.1.10.1 Only workers who work four or more days per week have the right to claim sick-pay in terms of this clause.

5.1.10.2 A worker who is unable to work on account of illness or injury is entitled to claim one day's paid sick leave for every full month that the worker has worked in terms of a contract.

5.1.10.3 A worker may accumulate a maximum of twelve days' sick leave in a year.

5.1.10.4 Accumulated sick-leave may not be transferred from one contract to another contract.

5.1.10.5 An employer must pay a task-rated worker the worker's daily task rate for a day's sick leave.

5.1.10.6 An employer must pay a time-rated worker the worker's daily rate of pay for a day's sick leave.

5.1.10.7 An employer must pay a worker sick pay on the worker's usual payday.

5.1.10.8 Before paying sick-pay, an employer may require a worker to produce a certificate stating that the worker was unable to work on account of sickness or injury if the worker is –

(a) absent from work for more than two consecutive days; or

(b) absent from work on more than two occasions in any eight-week period.

5.1.10.9 A medical certificate must be issued and signed by a medical practitioner, a qualified nurse or a clinic staff member authorised to issue medical certificates indicating the duration and reason for incapacity.

5.1.10.10 A worker is not entitled to paid sick-leave for a work-related injury or occupational disease for which the worker can claim compensation under the Compensation for Occupational Injuries and Diseases Act.

5.1.11 Maternity Leave

5.1.11.1 A worker may take up to four consecutive months' unpaid maternity leave.

5.1.11.2 A worker is not entitled to any payment or employment-related benefits during maternity leave.

5.1.11.3 A worker must give her employer reasonable notice of when she will start maternity leave and when she will return to work.

5.1.11.4 A worker is not required to take the full period of maternity leave. However, a worker may not work for four weeks before the expected date of birth of her child or for six weeks after the birth of her child, unless a medical practitioner, midwife or qualified nurse certifies that she is fit to do so.

5.1.11.5 A worker may begin maternity leave –

- (a) four weeks before the expected date of birth; or
- (b) on an earlier date –
 - (i) if a medical practitioner, midwife or certified nurse certifies that it is necessary for the health of the worker or that of her unborn child; or
 - (ii) if agreed to between employer and worker; or
- (c) on a later date, if a medical practitioner, midwife or certified nurse has certified that the worker is able to continue to work without endangering her health.

5.1.11.6 A worker who has a miscarriage during the third trimester of pregnancy or bears a stillborn child may take maternity leave for up to six weeks after the miscarriage or stillbirth.

5.1.12 Family responsibility leave

5.1.12.1 Workers, who work for at least four days per week, are entitled to three days paid family responsibility leave each year in the following circumstances -

- (a) when the employee's child is born;
- (b) when the employee's child is sick;
- (c) in the event of a death of –
 - (i) the employee's spouse or life partner;
 - (ii) the employee's parent, adoptive parent, grandparent, child, adopted child, grandchild or sibling.

5.1.13 Statement of Conditions

5.1.13.1 An employer must give a worker a statement containing the following details at the start of employment –

- (a) the employer's name and address and the name of the EPWP;
- (b) the tasks or job that the worker is to perform; and
- (c) the period for which the worker is hired or, if this is not certain, the expected duration of the contract;
- (d) the worker's rate of pay and how this is to be calculated;
- (e) the training that the worker will receive during the EPWP.

5.1.13.2 An employer must ensure that these terms are explained in a suitable language to any employee who is unable to read the statement.

5.1.13.3 An employer must supply each worker with a copy of these conditions of employment.

5.1.14 Keeping Records

5.1.14.1 Every employer must keep a written record of at least the following –

- (a) the worker's name and position;
- (b) in the case of a task-rated worker, the number of tasks completed by the worker;
- (c) in the case of a time-rated worker, the time worked by the worker;
- (d) payments made to each worker.

5.1.14.2 The employer must keep this record for a period of at least three years after the completion of the EPWP.

5.1.15 Payment

- 5.1.15.1 An employer must pay all wages at least monthly in cash or by cheque or into a bank account.
- 5.1.15.2 a worker may not be paid less than the national minimum wage rate of **28.79** per day. The minimum wage rate for the CLO is **R6500.00**. This will be adjusted annually on the 1st of November in line with inflation (Available CPI as provided by Stats SA six (6) weeks before implementation)
- 5.1.15.3 A task-rated worker will only be paid for tasks that have been completed.
- 5.1.15.4 An employer must pay a task-rated worker within five weeks of the work being completed and the work having been approved by the manager or the contractor having submitted an invoice to the employer.
- 5.1.15.5 A time-rated worker will be paid at the end of each month.
- 5.1.15.6 Payment must be made in cash, by cheque or by direct deposit into a bank account designated by the worker.
- 5.1.15.7 Payment in cash or by cheque must take place –
- (a) at the workplace or at a place agreed to by the worker;
 - (b) during the worker's working hours or within fifteen minutes of the start or finish of work;
 - (c) in a sealed envelope which becomes the property of the worker.
- 5.1.15.8 An employer must give a worker the following information in writing –
- (a) the period for which payment is made;
 - (b) the numbers of tasks completed or hours worked;
 - (c) the worker's earnings;
 - (d) any money deducted from the payment;
 - (e) the actual amount paid to the worker.
- 5.1.15.9 If the worker is paid in cash or by cheque, this information must be recorded on the envelope and the worker must acknowledge receipt of payment by signing for it
- 5.1.15.10 If a worker's employment is terminated, the employer must pay all monies owing to that worker within one month of the termination of employment.

5.1.16 Deductions

- 5.1.16.1 An employer may not deduct money from a worker's payment unless the deduction is required in terms of a law.
- 5.1.16.2 An employer must deduct and pay to the SA Revenue Services any income tax that the worker is required to pay.
- 5.1.16.3 An employer who deducts money from a worker's pay for payment to another person must pay the money to that person within the time period and other requirements specified in the agreement law, court order or arbitration award concerned.
- 5.1.16.4 An employer may not require or allow a worker to –
- (a) repay any payment except an overpayment previously made by the employer by mistake;
 - (b) state that the worker received a greater amount of money than the employer actually paid to the worker; or
 - (c) pay the employer or any other person for having been employed.

5.1.17 Health and Safety

- 5.1.17.1 Employers must take all reasonable steps to ensure that the working environment is healthy and safe.

- 5.1.17.2 A worker must –
- (a) work in a way that does not endanger his/her health and safety or that of any other person;
 - (b) obey any health and safety instruction;
 - (c) obey all health and safety rules of the EPWP;
 - (d) use any personal protective equipment or clothing issued by the employer;
 - (e) report any accident, near-miss incident or dangerous behaviour by another person to their employer or manager.

5.1.18 Compensation for Injuries and Diseases

- 5.1.18 .1 It is the responsibility of the contractor to arrange for all persons employed on a EPWP to be covered in terms of the Compensation for Occupational Injuries and Diseases Act, 130 of 1993.
- 5.1.18 .2 A worker must report any work-related injury or occupational disease to their employer or manager.
- 5.1.18 .3 The employer must report the accident or disease to the Compensation Commissioner.
- 5.1.18 .4 An employer must pay a worker who is unable to work because of an injury caused by an accident at work 75% of their earnings for up to three months. The employer will be refunded this amount by the Compensation Commissioner. This does NOT apply to injuries caused by accidents outside the workplace such as road accidents or accidents at home.

5.1.19 Termination

- 5.1.15.1 The employer may terminate the employment of a worker for good cause after following a fair procedure.
- 5.1.19.2 A worker will not receive severance pay on termination.
- 5.1.19.3 A worker is not required to give notice to terminate employment. However, a worker who wishes to resign should advise the employer in advance to allow the employer to find a replacement.
- 5.1.19.4 A worker who is absent for more than three consecutive days without informing the employer of an intention to return to work will have terminated the contract. However, the worker may be re-engaged if a position becomes available for the balance of the 24-month period.
- 5.1.19.5 A worker who does not attend required training events, without good reason, will have terminated the contract. However, the worker may be re-engaged if a position becomes available for the balance of the 24-month period.

5.1.20 Certificate of Service

- 5.1.20.1 On termination of employment, a worker is entitled to a certificate stating –
- (a) the worker's full name;
 - (b) the name and address of the employer;
 - (c) the EPWP on which the worker worked;
 - (d) the work performed by the worker;
 - (e) any training received by the worker as part of the EPWP;
 - (f) the period for which the worker worked on the EPWP;
 - (g) any other information agreed on by the employer and worker.

5.1.21 Contractor's default in payment to Labourers and Employees

Any dispute between the Contractor and labourers, regarding delayed payment or default in payment of fair wages, if not resolved immediately may compel the Employer to intervene.

The Employer may, upon the Contractor defaulting payment, pay the moneys due to the workers not honoured in time, out of any moneys due or which may become due to the Contractor under the Contract.

5.1.22 Provision of Hand tools

The Contractor shall provide his labour force with hand tools of adequate quality, sufficient in numbers and make the necessary provisions to maintain the tools in good and safe working conditions.

5.1.23 Reporting

The Contractor shall submit monthly returns/reports as specified below:

- Signed Muster rolls/pay sheets of temporary workers and permanent staff detailing the number, category, gender, rate of pay and daily attendance.
- Plant utilization returns
- Progress report detailing production output compared to the programme of works intensive and
which are undertaken by unskilled or semi-skilled workers.

9.2 Labour intensive competencies of supervisory and management staff

Contractors having a CIDB contractor grading designation of HIGHER and higher shall only engage supervisory and management staff in labour intensive works who have either completed, or for the period 1 April 2004 to 30 June 2006, are registered for training towards, the skills programme outlined in Table 1.

The managing principal of the contractor, namely, a sole proprietor, the senior partner, the managing director or managing member of a close corporation, as relevant, having a contractor grading designation of 1GB, 2 GB, 3 GB and 4 GB shall have personally completed, or for the period 1 April 2004 to 30 June 2006 be registered on a skills programme for the NQF level 2. All other site supervisory staff in the employ of such contractors must have completed, or for the period 1 April 2004 to 30 June 2006 be registered on a skills programme for, the NQF level 2 unit standards or NQF level 4 unit standards.

Table 1: Skills programme for supervisory and management staff

Personnel	NQF level	Unit standard titles	Skills programme description
Team leader / supervisor	2	Apply Labour Intensive Construction Systems and Techniques to Work Activities	This unit standard must be completed, and
		Use Labour Intensive Construction Methods to Construct and Maintain Roads and Storm water Drainage	any one of these 3 unit standards
		Use Labour Intensive Construction Methods to Construct and Maintain Water and Sanitation Services	
		Use Labour Intensive Construction Methods to Construct, Repair and Maintain Structures	
Foreman/ supervisor	4	Implement labour Intensive Construction Systems and Techniques	This unit standard must be completed, and

		Use Labour Intensive Construction Methods to Construct and Maintain Roads and Storm water Drainage	any one of these 3 unit standards
		Use Labour Intensive Construction Methods to Construct and Maintain Water and Sanitation Services	
		Use Labour Intensive Construction Methods to Construct, Repair and Maintain Structures	
Site Agent / Manager (i.e. the contractor's most senior representative that is resident on the site)	5	Manage Labour Intensive Construction Processes	Skills Programme against this single unit standard

5.2 Employment of unskilled and semi-skilled workers in labour-intensive works – According to SANS 1914-5.

5.2.1 Requirements for the sourcing and engagement of labour.

5.2.1.1 Unskilled and semi-skilled labour required for the execution of all labour intensive works shall be engaged strictly in accordance with prevailing legislation and SANS 1914-5, Participation of Targeted Labour.

5.2.1.2 The rate for unskilled labour must be in conformity with the national minimum wage.

5.2.1.3 Tasks established by the contractor must be such that:

- a) the average worker completes 5 tasks per week in 40 hours or less; and
- b) the weakest worker completes 5 tasks per week in 55 hours or less.

5.2.1.4 The contractor must revise the time taken to complete a task whenever it is established that the time taken to complete a weekly task is not within the requirements of 5.2.1.3.

5.2.1.5 The Contractor shall, through all available community structures, inform the local community of the labour intensive works and the employment opportunities presented thereby. Preference must be given to people with previous practical experience in construction and / or who come from households:

- a) where the head of the household has less than a primary school education;
- b) that has less than one full time person earning an income;
- c) where subsistence agriculture is the source of income.
- d) those that are not in receipt of any social security pension income

5.2.1.6 The Contractor shall endeavour to ensure that the expenditure on the employment of temporary workers is in the following proportions:

- a) 55 % women;
- b) 40% youth who are between the ages of 18 and 35; and
- c) 2% on persons with disabilities.

5.3 Specific provisions pertaining to SANS 1914-5

5.3.1 Definitions

Targeted labour: Unemployed persons who are employed as local labour on the project.

5.3.2 Contract participation goals

5.3.2.1 There is no specified contract participation goal for the contract. The contract participation goal shall be measured in the performance of the contract to enable the employment provided to targeted labour to be quantified.

5.3.2.2 The wages and allowances used to calculate the contract participation goal shall, with respect to both time-rated and task rated workers, comprise all wages paid and any training allowance paid in respect of agreed training programmes.

5.3.3 Terms and conditions for the engagement of targeted labour

Further to the provisions of clause 3.3.2 of SANS 1914-5, written contracts shall be entered into with targeted labour.

5.3.4 Variations to SANS 1914-5

5.3.4.1 The definition for net amount shall be amended as follows:
Financial value of the contract upon completion, exclusive of any value added tax or sales tax which the law requires the employer to pay the contractor.

5.3.4.2 The schedule referred to in 5.2 shall in addition reflect the status of targeted labour as women, youth and persons with disabilities and the number of days of formal training provided to targeted labour.

C3.3 PARTICULAR SPECIFICATIONS

In addition to the Standardized and Project Specifications the following Particular Specifications shall apply to this contract and are bound in hereafter.

SECTION PW371- B
SECTION EMP
SECTION OHS

BUILDING WORKS SPECIFICATIONS to be read with PW371 - A
ENVIRONMENTAL MANAGEMENT SPECIFICATION
OHS 1993 SAFETY SPECIFICATION

ENDER

PART C3.2.1

Particular Specification

(Read with PW371-A)

This specification falls under the Scope of Work as defined in Standard for Uniformity in Construction Procurement, published by the Construction Industry Development Board (CIDB), and is based on national or international standards, where such exist.

Works: **CONSTRUCTION OF MATLEREKENG SPORTS FACILITY**

Project Number: **EPMLM/8/3/515**

NOTE TO THE COMPILER

- > Make an office print-out of this part of PW371 for marking up during documentation.
- > Delete irrelevant clauses and add variations or additional requirements where necessary. Do not change heading numbers – they should correlate with PW371-A.
- > Choose the desired attribute or value where choices are separated with a double space-slash-double space. Delete unwanted attribute(s) or value(s). Asterisk (*) denotes the preferred attribute or value.
- > The specification data for SANS 2001 standards as listed in this publication is for guidance only. See Annex A of the relevant standard for the full list of specification data and follow instructions when required.
- > Where the reader is directed to <see drawings>, ensure the relevant item is shown in the drawings.
- > Dimensions presented are preferred dimensions according to the relevant SANS standard. Check availability or other dimensions with manufacturers/suppliers.
- > Delete all guidance notes (framed text) on completion (click just outside frame on text box and press <delete>).
- > Print out and hand in with drawings.

NOTE TO THE TYPIST

- > Text in this document is “styled”. All styles are listed in the Quick style box at the top of your screen under the HOME tab. Use the same styles throughout, and do not create new styles.
- > Heading 1 has autonumbering on (to keep footer text intact).
- > Heading 2 and 3 styles have autonumbering “off” to be consistent with Part A. You must number these headings manually.
- > To update the Table of Contents, click anywhere on the table to highlight and press F9.

TABLE OF CONTENTS

1	<u>Earthworks</u>	187
1.1	<u>Site clearance</u>	187
1.2	<u>Earthworks (general)</u>	187
2	<u>Concrete works</u>	189
2.1	<u>Structural works (SANS 2001-CC1)</u>	189
2.2	<u>Minor works (SANS 2001-CC2)</u>	190
2.3	<u>Foundations (SANS 2001-CM2)</u>	190
2.4	<u>Concrete floors and paving on the ground</u>	191
2.5	<u>Strongrooms</u>	191
3	<u>Masonry</u>	193
3.1	<u>Masonry Walling (SANS 2001-CM1)</u>	193
3.2	<u>Glass blockwork</u>	194
3.3	<u>Stone masonry</u>	194
3.4	<u>Masonry-type facings</u>	195
4	<u>Structural timberwork</u>	197
4.1	<u>Structural timberwork (flooring) (SANS 2001-CT1)</u>	197
4.2	<u>Structural timberwork (roofing) (SANS 2001-CT2)</u>	197
4.3	<u>Structural laminated timber (SANS 1460)</u>	198
5	<u>Structural steelwork</u>	201
5.1	<u>Structural steelwork (SANS 2001-CS1)</u>	201
5.2	<u>Sundry steelwork</u>	201
5.3	<u>Coating</u>	201
5.4	<u>Fire protection</u>	202
6	<u>Insulation, sealants, seals</u>	205
6.1	<u>Thermal insulation</u>	205
6.2	<u>Vapour barriers</u>	206
6.3	<u>Sound absorption</u>	207
6.4	<u>Joint fillers/sealants</u>	207
6.5	<u>Architectural seals</u>	207
7	<u>Roof coverings, cladding</u>	209
7.1	<u>General</u>	209
7.2	<u>Tile roofing/cladding</u>	209
7.3	<u>Profiled sheet roofing/cladding</u>	210

<u>7.4</u>	<u>Fully-supported metal sheet roofing and cladding</u>	212
<u>7.5</u>	<u>Thatch roofing</u>	212
<u>7.6</u>	<u>Flashings, trim</u>	212
<u>7.7</u>	<u>Fascias and barge boards</u>	212
8	<u>Waterproofing</u>	213
<u>8.1</u>	<u>Materials</u>	213
<u>8.2</u>	<u>Preparation</u>	213
<u>8.3</u>	<u>Application</u>	214
1.5	<u>Waterproofing surface finishes/protection</u>	214
9	<u>Ceilings, linings, partitions, access flooring</u>	217
<u>9.1</u>	<u>Branded ceilings</u>	217
<u>9.2</u>	<u>Suspended ceilings</u>	218
<u>9.3</u>	<u>Partitions, linings</u>	219
<u>9.4</u>	<u>Raised access flooring</u>	220
10	<u>Windows, doors, curtain walls, skylights, solar control</u>	223
<u>10.1</u>	<u>Performance</u>	223
	<u>General requirements</u>	223
<u>10.3</u>	<u>Steel frame units</u>	224
<u>10.4</u>	<u>Cold-rolled steel frame units</u>	224
<u>10.5</u>	<u>Aluminium frame units</u>	224
<u>10.6</u>	<u>Adjustable glass louvre windows</u>	225
<u>10.7</u>	<u>Wood frame units</u>	225
<u>10.8</u>	<u>PVC-U frame units (SANS 1553)</u>	225
<u>10.9</u>	<u>Polymer concrete frame units</u>	225
<u>10.10</u>	<u>Wood doors (SANS 545)</u>	225
<u>10.11</u>	<u>Fire doors and fire shutters (SANS 1253)</u>	226
<u>10.12</u>	<u>Garage doors</u>	226
<u>10.13</u>	<u>Roller shutter doors</u>	227
<u>10.14</u>	<u>Strongroom/record room doors, ventilators</u>	227
<u>10.15</u>	<u>Solar control</u>	227
11	<u>Plaster, screeds, toppings, terrazzo</u>	229
<u>11.1</u>	<u>Plaster</u>	229
<u>11.2</u>	<u>Screeds, toppings, terrazzo</u>	229
12	<u>Tiling</u>	233
<u>12.1</u>	<u>Materials</u>	233
<u>12.2</u>	<u>Tiling</u>	234

<u>12.3</u>	<u>Jointing</u>	234
<u>12.4</u>	<u>Movement joints</u>	234
13	<u>Floor coverings, wall linings</u>	237
<u>13.3</u>	<u>Thermoplastic and similar flexible floor covering</u>	237
<u>13.4</u>	<u>Wood flooring, solid and laminate, on solid substrates</u>	238
<u>13.5</u>	<u>Textile flooring</u>	239
<u>13.6</u>	<u>Epoxy flooring</u>	239
14	<u>Painting, paperhanging</u>	241
<u>14.1</u>	<u>Materials</u>	241
<u>14.2</u>	<u>Preparation of surfaces</u>	241
<u>14.3</u>	<u>Colours</u>	242
<u>14.8</u>	<u>Paint systems for on-site application</u>	242
<u>14.9</u>	<u>Paperhanging</u>	242
15	<u>Furniture, equipment, stairs, architectural metalwork</u>	243
<u>15.1</u>	<u>Joinery</u>	243
<u>15.2</u>	<u>Commercial kitchen cupboards (SANS 1385)</u>	246
<u>15.3</u>	<u>Commercial steel furniture (SANS 757)</u>	246
<u>15.4</u>	<u>Metal counters, balustrades, cladding, signs, street furniture</u>	246
<u>15.5</u>	<u>Stairs and ramps</u>	247
16	<u>Hardware</u>	249
<u>16.1</u>	<u>General</u>	249
<u>16.2</u>	<u>Fasteners</u>	249
<u>16.3</u>	<u>Locks, latches, catches, bolts</u>	249
<u>16.4</u>	<u>Hinges</u>	250
<u>16.5</u>	<u>Door closers</u>	250
<u>16.6</u>	<u>Pelmets, curtain rails, rods, blinds</u>	250
<u>16.7</u>	<u>Edge, feature, dividing strips</u>	251
<u>16.8</u>	<u>Sunken door matting</u>	251
<u>16.9</u>	<u>Number/name plates, safety signs</u>	251
<u>16.10</u>	<u>Drawer runners/slides</u>	251
17	<u>Glazing</u>	253
<u>17.1</u>	<u>Materials</u>	253
<u>17.2</u>	<u>Glazing</u>	253
<u>17.3</u>	<u>Mirrors</u>	254
18	<u>Drainage, sewerage, water and gas supply, fire equipment, sanitary plumbing</u>	255

<u>18.1</u>	<u>Roof eaves drainage</u>	255
<u>18.2</u>	<u>Flat concrete roof, balcony and floor drainage</u>	255
<u>18.3</u>	<u>Stormwater drainage</u>	256
<u>18.4</u>	<u>Sewerage</u>	256
<u>18.5</u>	<u>Water supply</u>	258
<u>18.6</u>	<u>Electric geysers and solar water heaters</u>	259
<u>18.8</u>	<u>Fire equipment</u>	259
<u>18.9</u>	<u>Sanitary plumbing</u>	260
19	<u>Electrical works</u>	263
<u>19.1</u>	<u>Earthworks (SANS 2001-DP1)</u>	263
<u>19.2</u>	<u>Cable ducts (underground) (SANS 2001-DP3)</u>	263
<u>19.3</u>	<u>Materials and installation</u>	263
20	<u>Mechanical works</u>	264
<u>20.1</u>	<u>Installation</u>	264
<u>20.3</u>	<u>Location and access</u>	264
21	<u>External works</u>	265
<u>21.1</u>	<u>Paving</u>	265
<u>21.2</u>	<u>Concrete culverts, kerbs, channels</u>	266
<u>21.3</u>	<u>Concrete retaining blocks</u>	266
<u>21.4</u>	<u>Gabions</u>	266
<u>21.5</u>	<u>Fencing</u>	267
<u>21.6</u>	<u>Precast concrete plank walling</u>	268
<u>21.7</u>	<u>Swimming pools</u>	268
<u>21.8</u>	<u>Timber decking</u>	268
<u>21.9</u>	<u>Landscaping</u>	269

1 Earthworks

1.1 Site clearance

Applicable standard: SANS 2001 – Construction Works Part BS1: Site clearance

SANS 2001 standard specifications are deemed to satisfy the provisions of SANS 10400.

SANS 2001-BS1 covers removal of vegetation, fences, guard rails and posts, litter and building rubble, boulders of size up to 0,15 m³, and surface and subsurface obstructions, and demolition and removal of structures (including their basements, if any), not directly associated with or incidental to any excavation.

Specification data¹:

- ☐ designated area/site in which work is to be carried out: see drawings
- ☐ level of finished earthworks: see drawings
- ☐ site clearing activity numbers: ...

1 / 2 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10 / 11 / 12

1 removal and disposal of vegetation; 2 removal and disposal of structures by means of bulldozing; 3 demolition, breaking up and removal of buildings to ground level; 4 demolition, breaking up and removal of underground structures; 5 ditto septic tanks, soak pits; 6 ditto litter, rubble, rocks on surface; 7 removal and stacking of re-useable materials; 8 removal of asphalt layers; 9 removal of paving; 10 removal of kerbs, channels, hunching; 11 scarifying, ripping to blocks <200 mm; 12 removal of disused foul water and storm water drains and water mains

- ☐ description of materials to be reused: ...

Activity 7 requires description of re use able materials

- ☐ depth of underground structures to be demolished: see drawings

Activity 4 requires depth of demolition of underground structures to be specified.

- ☐ depth for ripping or excavation: see drawings

Activity 11 requires depth for ripping or excavation to be specified

- ☐ designated sites for disposal of materials: see drawings
- ☐ designated sites for disposal of reusable materials: see drawings
- ☐ trees, turf, plants, bushes, shrubs and flora to be preserved and/or replanted: see drawings

Look up tree distance guidelines in SANS 10400-H Annex E.

- ☐ topsoil: select and stockpile

Topsoil is mostly a precious commodity.

1.2 Earthworks (general)

Applicable standard: SANS 2001-Construction works Part BE1: Earthworks (general).

SANS 2001-BE1 covers: excavation, filling, compaction and finishing of general excavations for buildings, bridges and structures, terracing, landscaping, and private railway sidings, carried out with heavy construction equipment or light construction equipment, or by hand.

Specification data:

- ☐ topsoil: select and stockpile
- ☐ areas where surplus and unsuitable materials shall be disposed of: see drawings
- ☐ areas to be topsoiled: see drawings
- ☐ areas to be grassed or vegetated: see drawings
- ☐ degree of accuracy required : II

¹ The specification data for SANS 2001 standards as listed in this publication is a selection of importance mainly for buildings. See Annex A of the relevant standard for the full list of specification data, and follow instructions when required for civil works.

Relevant standards:

SANS 10400-F Site Operations.

SANS 10400-G Excavations.

To be published: SANS 2001- Construction works Part BE2: Earthworks (small works).

ETENDER

2 Concrete works

2.1. Structural works (SANS 2001-CC1)

Omit this part if not relevant, or SANS 2001-CC2 Concrete Works (Minor Works) is specified.
SANS 2001-CC1 covers: structural concrete in buildings and structures where the design and supervision of reinforced, prestressed and precast concrete are under the direct control of appropriately qualified engineers and technologists. Does not cover piles, harbour and marine works, and underground works in mines.

Specification data: **materials**

- ☐ strength concrete grade: see drawings

10 / 15 / 20 / 25 / 30 / 40

Omit if prescribed mix concrete is specified.

Contractor is responsible for design of strength concrete.

Strength concrete is designated by its characteristic strength followed by the size of stone used in its manufacture, for example, grade 30/19 refers to a 30 MPa mix made with 19 mm stone. Stone size has little influence on strength but does affect workability and water demand.

Grades for typical applications are

10 (plain [unreinforced] concrete strip foundations, or surface beds where the slab does not serve as the final wearing surface);

15 (plain concrete strip foundations, floors on the ground that will serve as the final wearing surface);

20 (reinforced concrete subject to non-aggressive (dry) conditions; base courses of lightly loaded floors (no trucking) and one-course domestic and office floors on the ground that will serve as the final wearing surface; landscape footpaths);

25 (general reinforced concrete construction in buildings, bridges, culverts, silos, machine foundations, slab-on-the-ground foundations, unplastered walls above ground);

30 (machine foundations subject to vibration and shock; concrete roads; paving and floors on the ground to carry fork-lift trucks), precast concrete;

40 (specially watertight walls and tanks; highly stressed rc members; precast structural units; concrete subject to severe vibration and shock, abrasion and wear).

- ☐ prescribed mix concrete: SANS 2001-CC2 table 5 / ...

Omit if strength concrete is specified. SANS 2001-CC2 table 5 (19 mm aggregate) and table 6 (13 mm aggregate) contains generic prescribed concrete mixes for strength grade 10, 15, 20, 25, 30, or specify bespoke requirements.

- ☐ characteristic strength of tendon steel for prestressing: ...
- ☐ joint fillers, sealants, waterstops, bearings and accessories: ... / see Section 6
- ☐ steel joint cover plate finish: not galvanized / galvanized

off-form surfaces

- ☐ concrete off-form surface finish (smooth-special): steel forms, uniform texture, appearance and

Specify special off-form and exposed aggregate surfaces only with permission: timber boards, special patterned finish (hardboard, rubber, plastic), brushed, tooled, sand-blasted or aggregate transfer. See SANS 2001-CC1 table 1.

colour

construction joints

- ☐ type: see drawings

construction joint / movement joint / contraction joint / expansion joint

In general, in off-form surfaces, construction joints should be shown where a day's casting starts and ends, e.g. bottom and top of slab/column.

- ☐ joint sealing requirements: see Section 6

SANS 2001-CC1 specifies the finishing of exposed horizontal cast in situ concrete surfaces excluding industrial floors. Public ramps must have a safe gradient and frequent landings for disabled persons. Check with SANS 10400-S. See note on stairways at end of section.

- ☐ parts of the structure which need to be watertight: see drawings
- ☐ degree of accuracy required: II

precast/prestressed concrete

- ☐ surface finish required to precast units: special off-form / exposed aggregate / mosaic / ...
- ☐ prestressing particulars: ...
- ☐ order of loading and magnitude of load for each component of prestressing tendon: ...
- ☐ prestressing test requirements: ...
- ☐ position of lifting and supporting points, method of lifting, type of equipment and transport used in handling and erection of precast units: ...
- ☐ method of assembly and erection of precast units: ...
- ☐ design requirements for structural connections of precast units: ...
- ☐ degree of accuracy required: II
- ☐

additional requirements

- ☐ low-density concrete if not breeze (clinker) concrete at 800-960 kg/m³

60-160 (vermiculite) / 120-240 (perlite) / 450-720 (foamed slag) kg/m³

- ☐ form drip joint or downstand under all exposed off-form slab edges; chamfer exposed edges of off-form columns, slabs, joints etc.; use standard plastic joint formers

2.2 Minor works (SANS 2001-CC2)

Omit this part if SANS 2001-CC1 is specified.

SANS 2001-CC2 covers concrete works in foundations, slabs, stairways, masonry walls, pipelines, manholes, latrines, conservancy tanks, septic tanks and the like where the design and supervision of plain, reinforced and precast concrete are not necessarily under the direct supervision of approved, qualified engineers and technologists and no special finishes to the concrete are required. Use SANS 2001-CC1 when special finishes are required.

Specification data:

- ☐ horizontal surfaces that need to be non-skid: see drawings

2.3 Foundations (SANS 2001-CM2)

SANS 2001-CM2 covers construction requirements for strip footings, pad footings and slab-on-the-ground foundations to receive masonry walling, and the construction of lightly loaded concrete surface beds.

Specification data:

- ☐ site class designation: see drawings

R / H / C / S / P / H1 / C1 / S1 / H2 / C2 / S2 / H3

R rock; H heaving (expansive) soils; C collapsible soils; S compressible sand; P fill, dolomite, marshy areas, mine waste, very soft clays. Site class designations R, H, C, S indicate that the expected range of total soil movements arising from ground movements is such that no special precautionary measures are required to minimize the effects of differential ground movements on buildings. Number denotes higher range of movement. Behaviour of P is variable and the reason for such classification should be given in brackets, e.g. P (fill).

- ☐ foundations: in accordance with the requirements of SANS 10400-H for strip footings, slab-on-the-ground foundations or modified normal construction for category of expected damage 1 or 2 / rational design by competent person

See SANS 10400-H for geotechnical and/or structural solutions for foundations on problem soils.

- ☐ construction of steps in foundations in excess of 400 mm: see drawings

- ☐ minimum founding depth: see drawings

Required where the geotechnical report indicates a deeper requirement than that provided for in SANS 10400-H.

additional requirements

- ☐ protection against termites: SANS 10124.

2.4 Concrete floors and paving on the ground

- ☐ industrial floors: direct-finished one course slab as designed and constructed to SANS 10109 under direction of a competent person

Direct-finished one-course concrete floors on the ground are superior to concrete bases with screed or topping, and should be used if floor is to be left as is, or if to be covered with resilient floor finishes like thermoplastic tiles or carpet.

concrete

- ☐ concrete grade: see drawings

20 / 30

Show grades on drawings.

Default: (grade 20 for base courses of lightly loaded floors [no trucking] and one-course domestic and office floors on the ground that will serve as the final wearing surface, or grade 30 for paving and floors on the ground to carry fork-lift trucks) is acceptable.

damp-proof under-surface membrane

- ☐ DPM under floor area: required / not required

Dpm normally not required under external floors.

fabric reinforcement

- ☐ fabric reinforcement ref. no. 100 / ... / not required
- ☐ floor/paving thickness: see drawings

Floor thickness ranges between 120 and 360 mm, depending on loading, use

placing

- ☐ levels and gradients: see drawings

joints

- ☐ joint sealing: left open / sealed

Joints should be sealed when the floor is used under wet conditions, or where hygiene or dust has to be controlled.

2.5 Strongrooms

- ☐ fire rating, burglar resistance and wall thickness class: see drawings

1 / 2 / 3 / 4

Class: 1 (4h, no burglar resistance, 200 mm wall, 125 mm floor/ceiling); 2 (4h, limited burglar resistance, 300 mm); 3 (4h, medium burglar resistance, 450 mm); 4 (4h, high burglar resistance, 525 mm)

NOTE ON STAIRWAYS

The rule in SANS 10400 – M of a minimum going of 250 mm and a maximum rise of 200 mm often leads to a disregard for two other rules, i.e., “*the dimension of each step of the stairway shall be such that the sum of the going and twice the riser is not less than 570 mm and not more than 650 mm*”, and “*any stairway ... shall have dimensions appropriate to its use*” (NBR part M Stairways). A maximum rise of 180 and a minimum going of 280 is a more comfortable and safer proportion and should be used in most public buildings.

The full range of a more comfortable and safer proportion would be (rise/going):

180/280 mm; 170/280 – 320 mm; 150/280 – 350 mm; 120/280

3 Masonry

3.1 Masonry Walling (SANS 2001-CM1)

SANS 2001-CM1 Masonry Walling covers requirements for masonry walls, materials, the laying of masonry units in unreinforced and reinforced applications, the building in of door and window frames, holes and chases, the securing of timber roof structures and the fixing of slips.

Specification data:

masonry units

Bricks and blocks are collectively termed *masonry units*, whether solid or hollow. A block has dimensions which satisfy any one of the following conditions: a length of 300–650 mm, width of 130–300 mm, or height of 120–300 mm.

- ☐ type: burnt clay / concrete
- ☐ masonry units: SANS 2001-CM1 clause 4.1.1.3

Omit if masonry units to SANS 227 and SANS 1215 are specified.

SANS 2001 CM1 clause 4.1.1.1 states “Masonry units shall comply with the requirements of either 4.1.1.2 (SANS 227 and SANS 1215) or 4.1.1.3”. Clause 4.1.1.3 is a generic description, which may be more practical in areas where bricks to SANS 227 are unobtainable. Specify to clause 4.1.1.3 only with permission.

burnt clay masonry units (SANS 227*2)

Omit if requirements of SANS 2001-CM1 clause 4.1.1.3 are acceptable.

- ☐ nature of face unit: hollow / solid / contractor's choice
- ☐ class of face units: FBS / FBX / FBA

Class E bricks are any class of masonry unit produced for structural or load-bearing purposes in face or non-face work, and is supplied to an agreed compressive strength e.g. FBSE2, where the number equals the nominal compressive strength in megapascals.

- ☐ nominal dimensions: 222 x 103 x 76 mm

See SANS 227 for modular sizes, e.g. 190 x 90 x 90 mm.

- ☐ colour of face units: ...

concrete masonry units (SANS 1215*)

Omit if requirements of SANS 2001-CM1 clause 4.1.1.3 are acceptable.

- ☐ nature of unit: hollow / solid
- ☐ colour of face units: ...
- ☐ nominal dimensions: 190 x 90 x 90 / 290 x 90 x 90 / 390 x 90 x 190 / 390 x 190 x 190 mm

mortar

- ☐ sand: SANS 1090*

Omit if default (clause 4.1.4.1) is acceptable.

Clause 4.1.4.1 states that “Sand shall either comply with all of the following requirements or, if required in terms of the *specification data*, the requirements of SANS 1090 for mortar sand (natural or manufactured)”

- ☐ mortar class: II

Class I mortar is *suitable* for highly stressed masonry, e.g. multi-storey loadbearing buildings; class II is *suitable* for normal loadbearing applications, including parapets, balustrades, retaining structures, freestanding and garden walls, and walls exposed to severe dampness; class III mortar (not mentioned in SANS 2001-CM1) is *suitable* for lightly stressed bearing walls where exposure to dampness is not severe, or for renovation to unburnt clay masonry walling.

- ☐ pigments for mortar: ... ; colour: ... ; other requirement(s) : ...

reinforcement

- ☐ prestressing steel (hot-rolled bars or high tensile steel wire and strand) : ...

² Asterisk (*) denotes the preferred attribute or value.

Provide particulars or omit if not required.

NOTE on metal wall ties: SANS 204 requires masonry walls enveloping habitable portions of the building fabric in all climatic zones to be cavity or insulated cavity walls. Note that existing wire tie types may not be able to be centred centrally and conform to the minimum embedment rule of 50 mm. Note that crimp wire ties are not for use on cavity walls.

work

☐ face work jointing: struck* / flush / recessed / drip

Struck (half-round) joints are denser with better resistance to water penetration. Flush joints require careful cleaning of face work. Face work includes fair face work.

☐ face work pointing shape, colour: ...

Pointing is the raking out of brickwork joints 20 mm deep, then filling with mortar, usually coloured. Joint faces can be left flush, projecting, or shaped in the same way as jointing.

☐ multi-leaf wall bond: stretcher and brickforce / English bond (header course every second course) / collar-jointed bond

SANS 2001-CM1 specifies collar-jointed walls as default. Collar-jointed walls have a narrow cavity (<25 mm) between the leaves (the collar joint) which is filled solid with mortar or grout as the work progresses (not to be confused with *grouted cavity* construction where the cavity is wider and filled with concrete). Collar-jointing is intended for walls that require an effective thickness equal to the actual overall thickness of the wall. The success of this construction depends heavily on proper supervision. Collar-jointing is not mentioned in SANS 10249 Masonry Walling.

☐ position of control and articulation joints: see drawings

additional requirements

☐ wall type: see drawings

single leaf / multileaf / cavity / insulated cavity / grouted cavity / sealed multileaf

Sealed multileaf walls (outside face of inner leaf treated with a bitumen sealer) may be used in place of cavity walls in areas of prolonged, heavy, wind-driven rains, or where wall is faced with masonry-type facings (see *Masonry-type facings*)

☐ special shape face bricks: see drawings

single bullnose / double bullnose / single cant / double cant

☐ lintels in face work: see drawings

bed joint reinforced masonry / prestressed concrete lintels / galvanized steel / wood

For timber lintels see Section 4.

☐ cavity reveals around windows/doors: open / closed / see drawings

In energy rated buildings, at cavity reveals around openings, cavity insulation should continue up to window or door frames to prevent thermal bridging, therefore “open”.

A bituminous damp-proofing type may be required where bituminous waterproofing is to be bonded to damp-proofing – see Section 8.

3.2 Glass blockwork

glass blocks

☐ nominal dimensions: ...

☐ surface pattern: ...

☐ opacity: ...

☐ colour: ...

3.3 Stone masonry

Loadbearing stone masonry. For stone cladding see *Masonry-type facings*.

☐ type: rubble / dimension stone

3.3.1 Rubble

Rubble (koppieklip) is stone with irregular faces as found in nature on or near surface.

☐ bedding of stones: set in mortar / dry set, with smaller stones to achieve stability.

3.3.2 Dimension stone

- stone type: freestone / granite / marble / slate / cast stone

Freestone (makklip) is building stone soft enough to be cut with tools and uniform enough to be carved in any direction, typically sandstone.

- face dressing: plain / polished / rusticated / vermiculated / boasted / drafted margin
- shape and size: square sawn in modular rectangular sizes / ...
- bond to homogenous pattern: random coursed / regular coursed
- jointing: flush / keyed
- pointing colour: ...

3.4 Masonry-type facings

SANS 10073 The Safe Application of Masonry-type Facings to Buildings was withdrawn in May 2011 and “replaced” by SANS 10400-K Walls which does not yet touch on this important subject.

Thin panel cladding, e.g. marble, should be rail-fixed, leaving a cavity between facing and backing. The advantages of this system are avoidance of staining of the stone face, more reliable support, faster erection, smaller joints and less dependency on skilled labour. Consult specialist stonework contractors.

Facings wholly dependent on fixing to the backing with proprietary adhesive only may lead to failure.

- facing type: precast concrete / natural stone / burnt clay units / concrete units of design, size, colour and finish: ...

Joints should be sealed to prevent ingress of water and to provide for thermal and structural movement.

Relevant standards

SANS 993 Modular co-ordination

SANS 10021 The waterproofing of buildings (in the case of facings this depends on climatic region, facing material and backing).

SANS 10073 The safe application of masonry-type facings to buildings (withdrawn).

SANS 10145 Concrete masonry construction.

SANS 10164 The structural use of masonry.

SANS 10249 Masonry walling.

SANS 10400-H Foundations.

SANS 10400-K Walls.

SANS 10400-M Stairways.

SANS 10400-P Drainage.

4 Structural timberwork

4.1 Structural timberwork (flooring) (SANS 2001-CT1)

SANS 2001-CT1 covers the installation of suspended timber floors in buildings to be constructed for occupancy class H3 (domestic residence) and H4 (dwelling house) buildings, as described in SANS 10400-J Floors, and that have a distance that does not exceed 7 m between supports, and a beam/joist spacing that does not exceed 600 mm. Modify to make this part of SANS 2001 applicable for the installation of suspended timber floors designed for other occupancies or for greater dimensions between beams or supports.

For wood floors on solid substrates see Section 13.

Specification data:

softwood timber joists

- ☐ type: solid / laminated
- ☐ cross section: see drawings

Omit if default description (to SANS 10400-J) is acceptable.

hangers, masonry anchors

- ☐ size/strength: ...

Omit if default description in SANS 2001-CT1 (hangers: 4,0 kN; masonry anchors: 10 dia x 45 mm length, 2,5 kN) is acceptable.

softwood flooring boards

Omit this part if default description in SANS 2001-CT1 is acceptable. NOTE SANS 629 withdrawn 2012 without replacement. Most req'd data kept except marking.

- ☐ softwood flooring boards:

genus: Pinus / Cedrus / Podocarpus / Cupressus
nature: solid / laminated
grade: clear flooring / select flooring / flooring
density group: light / heavy

Density group: light (400-550 kg/m³); heavy (550 kg/m³, for example squash court floor boards)

cross section: see drawings

Omit if default (50 – 140 x ≥22 mm) is acceptable. Also 33 mm thickness.

length: >1 800 mm when square sawn at ends, >600 mm when matched
finger joints: not prominent

Omit if default (prominent) is acceptable.

hardwood strip flooring

NOTE SANS 281 Hardwood block and strip flooring withdrawn 2009 without replacement.

- ☐ species: ...
- ☐ dimensions: ≥460 x 57 – 90 x ≥20 mm

additional requirements

- ☐ hardwood species: ...
- ☐ hardwood prefinish: required / not required
- ☐ exposed faces of sawn structural timber: planed, sandpapered, and arris rounded to 3 mm radius.

4.2 Structural timberwork (roofing) (SANS 2001-CT2)

SANS 2001-CT2 covers the construction of timber roof assemblies in buildings. It includes the manufacture of bolted trusses that are designed in accordance with the requirements of SANS 10400, the erection of prefabricated timber trusses, the erection of rafters and purlin rafters, the fixing of purlins and battens, and the fixing of bracing to roofing members to support ceilings that comprise gypsum plasterboard, fibre-cement board or similar boards

Specification data:

softwood roofing timber

- ☐ type: solid / laminated
- ☐ cross section, grade: see drawings / to SANS 10400-L Roofs / to standard ...

roofing poles (“fence poles” SANS 457)

“fence” poles are normally used for roofs. See also “transmission” poles below

- ☐ roofing pole type: softwood SANS 457-2 / hardwood SANS 457-3 / to standard ...
- ☐ top diameter (thin end, colour-coded) : see drawings

50-79 (red), 80-99 (yellow), 100-119 (blue), 120-139 (white), 140-159 (orange), 160-179 (green), 180-199 (black) mm; ditto posts: 145-174, 175-199, 200-230 mm.

hangers, clips, masonry anchors

- ☐ size/strength: ...

Omit if default requirements (hangers: 4,0 kN; hurricane clips: 1,2 kN; masonry anchors: 10 dia x 45 mm length, 2,5 kN) are suitable.

additional clauses

- ☐ truss type: monoplanar prefabricated rational design to SANS 10243 or SANS 1900 / lapped and bolted within scope of SANS 10400-L/10243

In case of lapped and bolted trusses, show all member sizes and connection details on drawings. SANS 10243 provides guidance on the manufacture, erection and bracing of timber roof trusses. SANS 1900 covers a rational design prepared by a *Competent Person* and inspected by such a person during installation.

- ☐ “transmission” poles, diameter: softwood poles SANS 753 / hardwood poles SANS 754

Omit if “fence” poles to SANS 457 as required by SANS 2001-CT2 are acceptable. “Transmission” poles to SANS 753/754 should only be used when high strength is specifically required. See SANS 753 for lengths, minimum top diameter of poles.

- ☐ gang planks: two 150 x 38 mm softwood grade S5, nailed onto tie beams where shown on drawings / nailed onto tie beams of two adjoining trusses on both sides of geysers

Gang planks for walking/crawling in roof space, when required.

- ☐ timber lintels type and size: see drawings

softwood / hardwood / structural laminated timber / composite structural plywood web and solid timber flanges; grade: 5 / 7 / 10

4.3 Structural laminated timber (SANS 1460)

- ☐ material: see drawings

softwood (Pinus) / hardwood (Eucalyptus) / board (fibreboard, plywood, composite board)

- ☐ exposure class: 1 (exterior), 2 (semi-exterior), 3 (humid interior), 4 (dry interior)
- ☐ type: G (stocklam) / C (customlam)
- ☐ appearance and finish: rough-sawn (R), fine-sawn (F), planed (P), sanded (S), smoothed (G), coated (C), special (X)
- ☐ stress grade: 5 / 7 / 10 / 14
- ☐ fire retardant treatment: required / not required
- ☐ cross section: see drawings.

Relevant standards:

SANS 1288 Preservative treated timber.
SANS 1900: Monoplanar prefabricated timber roof trusses (nail-plated).
SANS 10005: Preservative treatment of timber.
SANS 10043: The laying of wood floors.
SANS 10082: Timber buildings.
SANS 10096: Manufacturing of finger-jointed structural timber.
SANS 10163 The structural use of timber.
SANS 10243 The design, manufacture and erection of timber trusses.
SANS 10400-J Floors.
SANS 10400-L Roofs.
SANS 10400-M Stairways.
SANS 10400-T Fire Protection.

ETENDER

5 Structural steelwork

5.1 Structural steelwork (SANS 2001-CS1)

SANS 2001-CS1 covers structural steelwork for buildings and other structures, excluding bridges, offshore structures, mobile equipment (stackers, reclaimers, draglines, cranes, etc.), mine shaft steelwork (buntions and guides) and mining conveyances, but does not cover roof and side cladding, or the detailed aspects of sundry items such as handrails, ladders, steel flooring and the like, neither does it cover protection of steelwork against corrosion or fire.

Specification data:

- ☐ class and grade of fasteners: ...
- ☐ format of drawings: ...

State in which format and to which standards each category of drawings shall be prepared.

- ☐ hole sizes for holding-down bolts in excess of 36 mm diameter: ...
- ☐ connections to allow movement: ...
- ☐ requirements for machining: ...
- ☐ requirements for non-destructive tests on welds: ...

5.2 Sundry steelwork

5.2.1 Material

cold-formed structural steel (SANS 10162)

- ☐ commercial quality steel: permitted if yield stress equals 200 MPa, tensile strength 365MPa; obtain proof.

Cold-formed profiles are often made from commercial quality steel of which the yield stress is seldom less than 210 MPa.

structural steel tubes SANS 657-1

- ☐ coating: uncoated / hot dip galvanized coating SANS 32 quality B
- ☐ size/profile: see drawings

Size/profile: 21, 27, 32, 34, 38, 42, 48, 51, 60, 76, 89, 102, 114, 127, 140, 152, 165, 178, 219 mm $\varnothing$ (general purpose); 20 x 20, 25 x 25, 30 x 30, 40 x 40, 50 x 50, 60 x 60, 70 x 70, 80 x 80, 90 x 90, 100 x 100, 115 x 115, 120 x 120, 135 x 135, 140 x 140, 150 x 150, 160 x 160, 175 x 175, 180 x 180 mm (square); 40 x 20, 50 x 30, 60 x 40, 80 x 40, 90 x 50, 100 x 50, 100 x 60, 120 x 60, 120 x 80, 140 x 90, 150 x 100, 160 x 80, 180 x 100, 200 x 100, 200 x 120, 220 x 140, 250 x 150 mm (rectangular)

corrosion resistant (weathering) steel

Corrosion resistant steel also known as COR-TEN, a registered trademark of USX Corporation. Corrosion resistant steel is weldable. Available in sheet (<2,0 mm) and strip (2,5 – 6,0 mm). Consult Mittal Steel.

- ☐ grade: 1 / A

steel wire rope (cables)

- ☐ class: 6 x 7 / 6 x 24 / 6 x 37 / 8 x 19 mm
- ☐ diameter: 6 / 7 / 8 / 9 / 10 mm.

5.3 Coating

- ☐ type: hot dip galvanising / prepainting / hot dip galvanising and prepainting (duplex system)

Other coating types on steel are vitreous enamel, plastic or protective tape.

SANS 121 provides for one set of coating thickness only – see NOTES at end of Section. Thicker (25%) coatings may be requested without affecting specification conformity. The primary influencer on hot dip galvanized coating is the steel composition. See SANS 14713 for design guidelines.

hot dip galvanising

The Hot Dip Galvanizers Association South Africa (HDGASA) is the industry representative body.

- ☐ significant (architectural) surfaces: see drawings

NOTE on appearance of galvanized coatings

SANS 121:

"The primary purpose of the galvanized coating is to protect the underlying iron or steelwork against corrosion. Considerations related to aesthetics or decorative features should be secondary. Where these secondary features are also of importance it is highly recommended that the galvanizer and customer agree the standard of finish that is achievable on the work [in total or in part], given the range of materials used to form the article. This is of particular importance where the required standard of finish is beyond that set out in this section. It should be noted that 'roughness' and 'smoothness' are relative terms and the roughness of coatings on articles galvanized after fabrication differs from mechanically wiped products, such as galvanized sheet, tube and wire. It is not possible to establish a definition of appearance and finish covering all requirements in practice.

The occurrence of darker or lighter area (e.g. cellular pattern or dark grey areas) or some surface unevenness shall not be cause for rejection: also wet storage stain (white or dark corrosion product – primarily basic zinc oxide – formed during storage in humid conditions after hot dip galvanising) shall not be cause for rejection, providing the coating thickness remains above the specified minimum value."

- ☐ sample: required / not required
- ☐ special pre-treatments: ...
- ☐ special coating thickness: ...
- ☐ any after treatments: ...
- ☐ method of site repair and maximum allowable size of repair: ...

Omit if default (repair by either zinc metal thermal spraying, zinc rich epoxy or a *suitable* zinc rich paint, provided that the repaired surface receive an additional 30 µm over and above that required in terms of the specification; HDGASA recommends a practical repair area of ± a R5 coin) is acceptable.

- ☐ architectural work to be packaged: required / not required

paint or varnish

SANS 12944 covers the following suitable surfaces for painting: uncoated steel; thermally sprayed with zinc, aluminium or their alloys; hot dip galvanized; zinc-electroplated; sherardized; prefabrication primed; other painted surfaces. Part 2 deals with the principal environments and the corrosivity of these environments to which steel structures are exposed: atmospheric corrosivity category: C1 very low / C2 low / C3 medium / C4 high / C5-I very high (industrial) / C5-M (marine); immersed category for water and soil: Im1 (fresh water) / Im2 (sea or brackish water) / Im3 (soil). Part 5 deals with paint systems.

- ☐ paint system: alkyd / chlorinated rubber / PVC / acrylic / epoxy / ethyl silicate / polyurethane / bitumen

Protective paint systems not covered: powder coating; stoving enamel; heat-cured paints; linings of tanks; products for the chemical treatment of surfaces.

5.4 Fire protection

The yield strength of steel is halved at temperatures exceeding 550°C. Consider placing columns outside building.

- ☐ protection of structural steel against fire: see drawings

reinforced concrete grade 25 / solid masonry / sprayed vermiculite-cement/perlite-cement / metal lath and plaster

Relevant standards:

SANS 1921 Construction and management requirements for works contracts.

SANS 10094 The use of high-strength friction-grip bolts.

SANS 10162 The structural use of steel.

SANS 14713 Protection against corrosion of iron and steel in structures – zinc and aluminium coatings – guidelines.

HDGASA code of practice no 1-1990 The Surface Preparation and Application of Organic Coatings to New, Unweathered Hot Dip Galvanized Steel (Sheet and Section) Excluding In-line Coil Coatings.

HDGASA code of practice no 2-1990 Specification for the Performance Requirements of Coating Systems Applied to New Unweathered Hot Dip Galvanized Steel (Sheet and Section) excluding In-line Coil Coating (Duplex Systems).

NOTES on hot dip zinc coating thickness and service life:

Consult the Hot Dip Galvanizer's Association of South Africa (HDGASA) for determination of high corrosivity areas.

All hot dip galvanising specifications state the minimum *suitable* coating thickness and not average coating thickness. The thickness actually achieved varies with steel composition and thickness of steel, and can range from the minimum up to >50% greater. As life expectancy predictions are normally based on the minimum coating thickness, they are usually conservative.

Hot dip galvanized coating on structural steel should in most cases provide a service-free life of 40 – 50 years. This is determined by dividing the minimum achieved coating thickness taken on the thinnest steel component by the corrosion rate per year for the location in question (see table).

HDGASA uses SANS ISO 9223 to determine corrosivity categories, based on three factors:

1) Time of wetness, being the period that the zinc surface is covered by liquid containing the corrosive elements (electrolyte); 2) Airborne pollution containing sulphur dioxide (SO₂); 3) Airborne pollution containing salinity, usually in the form of chlorides carried on prevailing sea winds.

Estimated service life of hot dip galvanized steel complying with SANS 121				
Corrosivity Category ISO 9223	Zinc corrosion rate / yr	55 µm for steel 1.5 – 3mm thick	70 µm for steel 3 – 6 mm thick	85 µm for steel >6 mm thick
C 1 very low	<0.1 µm	>100 yrs	>100 yrs	>100 yrs
C 2 low	0.1 – 0.7	<78.5 yrs	>100 yrs	>100 yrs
C 3 medium	0.7 – 2.1	26 – 78.5 yrs	33 – 100 yrs	40 – >100 yrs
C 4 high	2.1 – 4.2	13 – 26 yrs	16 – 33 yrs	20 – 40 yrs
C 5 very high	4.2 – 8.4	6.5 – 13 yrs	8.3 – 16 yrs	10 – 20 yrs

Source: HDGASA Information sheet No 8.

Coating thickness in µm can be converted to approximate coating mass per unit area in g/m² by multiplying by the nominal density of the coating (7,2 g/cm³): thus 55 µm = 395 g/m²; 70 µm = 505 g/m²; 85 µm = 610 g/m²

Source: SANS 121 / SANS 14713.

Z275 is the designation for 275 g/m² zinc/surface area on both sides of steel sheet (for sheet that would mean 137.5 g/side) which equals a mean coating thickness of 19 µm. Similarly, Z450 equals 22 µm, and Z600 equals 43 µm).

6 Insulation, sealants, seals

6.1 Thermal insulation

6.1.1 Materials

Consider insulation materials with recycled content, e.g. polystyrene, glass fibre, cellulose and polyester fibre. Consult TIASA (Thermal Insulation Association of SA) or EPSASA (Expanded Polystyrene Ass. of SA).

- ☐ type: bulk (rigid board, fibre matts or batts) / reflective (foil) / composite bulk / loose fill / pipe / spray foam
- ☐ required R-value/thickness: SANS 204

Show all insulation thicknesses on drawings. Actual R-value test results may be obtained from the South African Fenestration and Insulation Energy Rating Association (SAFIERA).

- ☐ required fire performance classification of thermally insulated building envelope systems: SANS 428

combustability: A / B

A (non combustible); B (combustible)

surface fire spread properties: 1 / 2 / 3 / 4 / 5 / 6

1 (no flame spread) / 2 – 6 (rapid flame spread)

application: vertical / horizontal / vertical and horizontal / see drawings

Consult SANS 10400-T for fire performance requirements.

rigid board

- ☐ material: EPS / XPS / EPU
- ☐ expanded polystyrene (EPS) grade: 16D-85 / 24D-170 / 32D-225

16D-85 (standard); 24D-170 (high); 32D-225 (extra high) (density kg/m³–compressive strength kPa)

EPS is combustible on its own but claimed to be fire-safe in a masonry cavity with closed reveals (see EPSASA leaflet *EPS Cavity Wall Insulation*). EPS will resist the passage of moisture. Panel width: 600 mm; thicknesses: 25, 30, 40, 50 (ex stock), 60, 70, 80 (to order)

- ☐ face: plain / foil / ...
- ☐ edge: square / shiplap / tongue and groove

fibre matts/batts

- ☐ form: matts (flexible) / batts (rigid)
- ☐ face: plain / foil / ...

Typical fibres are mineral (rock wool, glass wool), synthetic (polyester, polyethylene), and natural (wool). Fibre insulation is not recommended in partial fill masonry cavity construction – consult manufacturer.

reflective foil

- ☐ reflective foil class: A / B / C / D

A (reinforced, both surfaces reflective), B (reinforced, one surface reflective), C (unreinforced, both surfaces reflective), D (unreinforced, one surface reflective). Foil may double as an effective vapour barrier. See additional notes on foil at end of this section.

The thermal resistance of reflective insulation varies with the direction of heat flow through it, i.e. vertical, horizontal or sloped, and the number and defined thickness of air spaces it faces. It is important that bright surfaces facing air spaces remain untarnished on at least one surface.

The difference in direction of heat flow is generally marginal for bulk insulation but can be pronounced for reflective insulation. Reflective insulation is more effective at reducing summer heat gain than reducing winter heat loss.

Reflective foils are valuable when used in combination with bulk insulation for improved performance.

Composite bulk and reflective materials are available that combine some features of both types. Examples include foil bonded to bulk insulation, whether blankets, batts or boards, i.e. foil faced blankets, foil faced batts and foil faced boards.

metal faced insulation panels

For use in buildings, cold rooms and hot rooms, interior and exterior.

- ☐ corrosion comparison index of panel-facing coating: 1 / 2 / 3 / 4
- ☐ core insulation: calcium silicate / mineral fibre / polyisocyanurate / polyphen / polystyrene / polyurethane / rockwool
- ☐ facing: chromadek / galvanized steel / PVC laminated galvanized steel / stainless steel / zincalume

Metal faced insulation panels are typically used in cold storage systems. Consult TPMA (Thermal Panel Manufacturer's Association).

loose fill

- ☐ loose fill: pellets or granules / cellulose.

6.1.2 Installation

- ☐ system: SANS 204 / rational design

masonry cavity wall insulation

- ☐ type: full fill cavity / partial fill cavity / loose fill / see drawings

Insulation can be installed full fill in cavities in most areas where cavity walls are not required to prevent moisture migration, or where walls are plastered and painted or protected by roof overhangs of >750 mm.

Insulation should be installed partial fill in cavities where the cavity also serves as a moisture barrier against wind-driven rain, mostly in winter rainfall areas, but also in cases of exposed face brick walls in general (e.g. gable walls, walls without roof overhangs, high buildings).

In exposed walls, filling cavities with loose fill insulation may result in insulation becoming wet, losing its insulation value and causing dampness on the inner leaf.

Filling of concrete block cores with any type of insulation offers little energy savings since the majority of heat is conducted through the webs and mortar joints.

masonry wall external face insulation

- ☐ masonry wall external face insulation: ...

Omit if default (patent system of EPS external insulation bonded and mechanically fixed to dry, sound and flat surface, finished with reinforced polymeric plaster) is acceptable, or specify alternative.

Installing insulation against internal face of envelope wall would result in losing capacitive insulation of internal leaf (thermal mass).

pitched roof/ceiling insulation

- ☐ system: reflective foil under roof covering / bulk insulation on ceiling / foil + bulk / see drawings

flat roof insulation

- ☐ material: rigid EPS insulation density 32D
- ☐ flat roof insulation position: over waterproofing / under screed

Insulation on flat trafficable concrete roofs should be firm enough to support the waterproofing system and foreseeable loadings, i.e. under screed. See Section 8 for further particulars.

floor insulation

- ☐ under floor slab insulation: required / not required

In case of in-slab heating as required by SANS 204.

6.2 Vapour barriers

- ☐ type: ...
- ☐ position: see drawings

Clay brick and concrete block masonry is able to accommodate moisture migration (damp open), normally rendering a vapour barrier unnecessary. SANS 204 advises that designers should consider that interstitial condensation occurs in walling systems which are not able to prevent or accommodate moisture migration. Also, that artificial cooling of buildings in some climates can cause condensation to form inside the layers of the building envelope. Such condensation can cause significant structural or cosmetic damage to the envelope before it is detected. Associated mould growth may also create health risks to the occupants. Effective control of condensation is a complex issue. In some locations a fully sealed vapour barrier may need to be installed on the more humid, or generally warmer, side of the insulation.

6.3 Sound absorption materials

- ☐ structure-borne sound insulation: mineral fibre mats SANS 1381 / cork
- ☐ airborne sound absorption: mineral fibre mats SANS 1381 + perforated 10 mm plywood / plasterboard / hardboard / metal / see drawings.

6.4 Joint fillers/sealants

- ☐ joint filler/sealant colour: ...

Industrial sealants compatible with bitumen may not be available in SA.

Two-part sealants are generally more effective and costly than one-part sealants.

See also SANS 2001-CC1 for specification of waterstops.

6.5 Architectural seals

- ☐ type: patent extruded aluminium carriers with flexible seal inserts of synthetic rubber, rigid PVC, nylon brush filaments, polypropylene pile, or silicone rubber / patent PVC, pile or neoprene door and window frame seals / patent silicone intumescent seals (fire and smoke) / patent external extruded aluminium threshold plate seals

Architectural seals need careful study by the designer – consult supplier.

- ☐ aluminium extrusion finish: mill / anodised / painted
- ☐ intended use of seal: energy (draughts, dust, insects) / intumescent (fire and smoke) / acoustic (noise) / finger-pinch protection (schools, day-care centres) / threshold plate / access (mobility, disabled persons)

Intumescent seals are designed to expand when subjected to heat.

- ☐ duty level: light / medium / heavy

Duty level: light (domestic); medium (commercial); heavy (hospitals, airports, shopping malls).

- ☐ mounting: fully morticed / semi morticed / surface mounted / grooved.

NOTE: Additional notes on reflective foil thermal insulation:

The difference in direction of heat flow is generally marginal for bulk insulation but can be pronounced for reflective insulation. Reflective insulation is more effective at reducing summer heat gain than reducing winter heat loss.

The thermal resistance of reflective insulation varies with the direction of heat flow through it, i.e. vertical, horizontal or sloped, the number of air spaces and defined thicknesses of the air spaces. Furthermore, that the bright surfaces facing the air space/spaces remains untarnished on at least one surface.

Reflective foils are valuable when used in combination with bulk insulation for improved performance.

Composite bulk and reflective materials are available that combine some features of both types. Examples include foil bonded to bulk insulation, whether blankets, batts or boards, i.e. foil faced blankets, foil faced batts and foil faced boards.

7 Roof coverings, cladding

To be published: SANS 2001-CR2 Tiled and sheeted roofs.

7.1 General

☐ type of cover, cladding: see drawings

tile / profiled sheet / fully-supported sheet / thatch

☐ roof pitch: see drawings

Check minimum roof pitches with SANS 10400-L. Roof pitches below that recommended by the manufacturer can be achieved by laying plywood boarding over the rafters and covering with waterproofing before tiling. Check with manufacturer.

underlay

☐ underlay type: reflective foil / polymer / the subject of an active Agrément Certificate

See Section 6 for reflective foil. Reflective foil doubles as thermal insulation and should be first choice in hot climates.

7.2 Tile roofing/cladding

7.2.1 Materials

☐ type of tile: concrete / clay / slate / fibre-cement / metal

concrete roof tiles

Concrete roof tiles have a mass of $\pm 55 \text{ kg/m}^2$ laid.

☐ pattern and colour: ...

☐ type: plain / interlocking

☐ body colour or surface coating category: 1 / 2 / 3 / 4

1 (none); 2 (surface coating only); 3 (body colour only); 4 (both).

☐ finish: throughcolour / granular / sanded

clay roof tiles

☐ type: Broseley (plain) / Marseilles (interlocking) / ...

☐ colour: ...

natural slate tiles

☐ size, colour: ...

fibre-cement slates

☐ texture, colour: plain / textured / natural / ...

Mass of fibre-cement tiles is 25 kg/m^2 laid.

metal roofing tiles

☐ material, finish: hot dip galvanized steel / aluminium alloy / stainless steel / coated / uncoated

fixing materials

☐ fixing materials: galvanized steel / stainless steel or aluminium

Galvanized steel in inland regions. Stainless steel or aluminium in *coastal regions* or corrosive atmospheres, except for clay tiles where all fixings shall be stainless steel.

7.2.2 Roof tiling

preparation

☐ terrain category: 1 / 2 / 3 / 4

Terrain category 1: exposed open/ *coastal areas* (generally the area within 5km from the coast-line unless otherwise defined locally); 2: exposed with scattered obstructions; 3 : well-wooded areas and suburbs, town and industrial areas; 4: large city centres.

☐ design wind speed: 40 / 45 / 50 / 55 m/s

☐ height above ground / number of storeys: ...

☐ eaves: open / boarded

Eaves should be boarded in exposed terrains.

laying

- ☐ tile: concrete / clay / slate / fibre-cement / metal
- ☐ valley gutter: open / concealed
- ☐ verge tiles: required / not required

roof underlay

- ☐ roof underlay: required / not required

Underlays are strongly recommended in any area, and are mandatory in exposed and coastal terrains, depending on pitch. Not required for metal roof tiles.

SANS 204 states "all tile roofs in climatic zones 1, 2, 4 and 6 shall have a tile underlay or radiant barrier and the joints shall be sealed to prevent air infiltration and leakage".

7.3 Profiled sheet roofing/cladding

7.3.1 Metal sheet

Mass of metal sheet roofing is $\pm 11 \text{ kg/m}^2$.

metal

- ☐ metal and coating: zinc-coated (galvanized) steel / AZ-coated steel / prepainted zinc coated steel / weathering steel / natural aluminium alloy / prepainted aluminium alloy / stainless steel / copper

Copper, aluminium, stainless steel or weathering steel should be used in environments where atmospheric corrosion is aggressive. Check availability, thickness and finish of these metals with manufacturer/ supplier.

profile

- ☐ profile: corrugated / box rib (IBR) / interlocking box rib / rib-trough/standing seam
- ☐ sheet length: single lengths per roof slope / standard lengths with overlap / single length standing seam over-ridge (see ridding)

Standard lengths (1,8 – 14 m) – check with manufacturer/ supplier.

Corrugated and IBR sheets in standard lengths with overlap causes less thermal movement stress on exposed fixings than long lengths.

steel

- ☐ nominal sheet thickness: 0,5 / 0,6 mm

Check availability of 0,8 mm sheets. 0,6 mm thick sheet costs $\pm 16\%$ more than 0,5 mm.

- ☐ coating grade: Z275 / Z600 / AZ150 / AZ200

Z275 and AZ150 for inland regions, Z600 and AZ200 for coastal regions and aggressive atmospheres.

Coiled sheeting with hot dip zinc coating (galvanising) class Z275 has an average zinc coating thickness of about $19\mu\text{m}$; Z600 - $42\mu\text{m}$. AZ coatings have increased corrosion resistance over zinc coating by 3 or 4. See notes on hot dip galvanising under Section 5 Structural Steel. Get expert advice from HDGASA or ARTF - SCRACE.

aluminium alloy

- ☐ aluminium roofing sheet thickness: 0,6 (cladding only) / 0,7 / 0,8 / 0,9 mm

stainless steel

- ☐ stainless steel thickness: 0,5 / 0,6 mm

copper

- ☐ copper: 0,6 mm thick

prepainted metal

- ☐ prepainted metal sheet type: 3 / 4 / 5a / 5b / 6a / 6b

Type 3 (mild to moderate rural, urban, tropical and industrial environments) / 4 (marine and industrial) / 5a (severe marine) / 5b (heavy industrial and industrial marine) / 6a very severe marine) / 6b (very severe industrial).

Coil coated and prepainted products are e.g. Chromadek or Chromadek Plus (Mittal Steel) for marine and industrial environments; there are several others. Paint coating more than doubles the life of sheets with metal coating only.

weathering steel (Cor-ten)

- ☐ weathering steel: 0,8 mm

bullnosing

- ☐ bullnosing radius: ...

Minimum radius about 500 mm (inside radius), depending on material, profile and sheet thickness.

roof ventilators

- ☐ roof ventilator type, material, dimensions: ...

7.3.2 Fibre-cement sheet

Mass of 5 mm thick fibre-cement sheets is 15 kg/m². Purlins must be 50 x 76 mm at 1 200 max spacing on trusses/beams at 1 200 max spacing (SANS 10243). Finish fibre-cement sheets in *coastal areas* with an anti-fungal paint – see section 14 Painting.

- ☐ bullnosing radius: ...

7.3.3 Glass-reinforced polyester sheet

See also SANS 141 GRP laminates.

- ☐ type: 1 / 2

1 (with weathering protection both sides) / 2 (ditto one side)

- ☐ class: W / WF

W (without fire-retardant properties) / WF (with fire-retardant properties)

SANS 10400-L: “skylights shall have a maximum opening area of 0,6 m² or, if in the form of a translucent roof sheet, an installed width of 700 mm”.

- ☐ mass: 1,0 – 1,4 kg/m² (domestic) / 1,4 / 1,8 / 2,4 kg/m² (industrial)
- ☐ opacity: clear / opaque
- ☐ colour: ...
- ☐ profile: see drawings / to match roofing/cladding sheet / corrugated / IBR / ...

7.3.4 Polycarbonate sheet

- ☐ colour: ...
- ☐ thickness: 1,0 mm / 1,2 mm

1,0 mm (domestic) / 1,2 mm (industrial)

- ☐ profile: see drawings / to match roofing/cladding sheet / corrugated / IBR / ...

7.3.5 Fasteners and washers

- ☐ corrosion resistance class: 1 / 2 / 3 / 4

1 (general internal) / 2 (general internal with significant condensation) / 3 external, mild to moderate industrial or marine) / 4 (external severe marine)

Identification of corrosive characteristics of the environment is essential.

Corrosion resistance class 2, 3 and 4 correspond with class C2, C3 and C4 of ISO 9223.

Some coating information for zinc and tin-zinc coated fasteners (corrosion resistance class, coating type, coating thickness in µm):

- 1, electroplated zinc (EZ), 4
- 2, EZ, 12
- 2, mech. plated zinc (MPZ), 17
- 3, EZ, 30
- 3, hot dip galv (HDG), 30
- 3, MPZ, 40
- 4, HDG, 50
- 4, MPZ, 45. For full list see SANS 1273.

- ☐ type and size: hook-bolt / U-bolt / J-bolt / drive screw / self-tapping screw / according to roofing material *manufacturer's instruction*
- ☐ material: zinc-coated carbon steel / stainless steel.

7.3.6 Installation

exposed fixing

- ☐ box rib cladding: with rib against girt / with rib away from girt

lapping

Sealing of laps in sheeted roofs in climate zone 1, 2, 4 and 6 is mandatory (SANS 204)

7.4 Fully supported metal sheet roofing and cladding

Flat metal sheet with standing seams on continuous solid boarding can follow any shape within limits of the boarding. The specification presented in PW371-A is for copper. Other materials are zinc, lead, aluminium or hot dip galvanized steel. Check material and fixing with specialists.

Boarding must be able to absorb condensation under roof sheet - use of chipboard or other dense boarding material will cause corrosion. Board thickness depends on span.

7.5 Thatch roofing

To be published: SANS 2001- Construction Works Part CR3: Thatch Roofing.

Cost of a thatch roof is 15 – 20 % higher than a conventional roof. Check insurance requirements.

Consider requesting that the work be done by a member of the South African Thatcher's Association.

Avoid penetrations of the roof area – place chimneys preferably at the ridge, ventilation pipes outside the exterior wall faces.

Thatch can be shaped and moulded.

☐ thatch type: grass / Cape reed (dekriet) / water reed

Local grass will weather better in the same climate from which it originates. Hyparrhenia and Hyparphilia species should last for 35 years. Thamnochortis species (Cape reed/dekriet) could last for 75 years. Also Phragmites Communis reed. 175 mm thick thatch weighs 35 kg/m², about 40 bundles of grass per m².

Roof pitch in general should not be less than 45 degrees, 40 degrees at dormers (SANS 10400-L).

After the maintenance period the roof should be serviced every 10 – 12 years, and a new layer of 70 – 100 mm thatch added after 35 years. The life of thatch will be prolonged by brushing with a thatch spade at 4 – 5 year intervals.

☐ wire sways: prohibited / allowed

Wire sways should not be used in roof construction in areas where lightning is a problem unless provided with a lightning protection system (See SANS 10400-T).

☐ ridding: thatch / sand-cement / fibreglass

☐ fire retardant treatment: none / pre-treatment / during construction / after installation

7.6 Flashings, trim

Flashings to metal roofs should be similar to roof material to ensure same life to first maintenance and avoid electrolytic corrosion.

Counter flashings with an anti-capillary fold avoid electrolytic corrosion.

7.7 Fascias and barge boards

☐ size: see drawings.

Relevant standards:

SANS 10062: The fixing of concrete roof tiles.

SANS 10237: Roof and side cladding.

SANS 1200 HB-Cladding and sheeting.

SANS10400-L Roofs.

SANS 10400-T Fire protection.

Concrete Roof Tiles – Technical Manual. Concrete Manufacturer's Association.

Guide to good thatching practice. Thatcher's Ass of SA.

8 Waterproofing

To be published: SANS 2001-EW Waterproofing.

8.1 Materials

This section covers the conventional system of waterproofing with membranes only. Damp proofing in masonry is covered in SANS 2001-CM1. Consult The Concrete Institute for the waterproofing of concrete with additives.

The Waterproofing Federation of South Africa is the industry representative body.

SANS 10021 is outdated but useful and hopefully to be revised.

Bituminous felt (SANS 92), mastic asphalt (SANS 297/405) and elastomeric membranes like butyl rubber (polyisobutylene, SANS 187), chloroprene rubber (SANS 580) and EPDM (Ethylene Propylene Diene Monomer) have been used in the past but have largely been replaced by polymer modified bitumen membranes. No national standard exists for polymer-modified bitumen membranes, but most systems are Agrément certified.

reinforced bitumen membrane (RBM)

☐ finish: plain / slate granular / metal foil: aluminium or copper

self-adhesive plastic membrane (APM)

☐ finish: plain / foil / granular / polyester fabric

Self-adhesive membranes are thin (1,5 mm), normally laid as single layer systems to be covered (not UV resistant, except with foil, granular or fabric finishes).

reinforced liquid membrane (RLM)

☐ in situ reinforced liquid system: acrylic emulsion / bitumen emulsion / cementitious

Acrylic or bitumen emulsion is suitable only for exposed roofs and parapet walls. Cementitious systems can only be applied to cementitious backgrounds and can be tiled directly.

cavity drainage membrane

Studded polypropylene or HDPE cavity drainage membranes allow damp or running water to travel behind the membrane to a controlled drainage system. They are lighter than conventional stone and geotextile, provide continuous drainage and act as slip/separation layer.

slip/protection layers, geomembranes

Check requirements for bituminous felt or HDPE slip/protection layers and thermoplastics geomembranes.

outlets

☐ outlet type: roof / small balcony / shower

☐ size: >75 mm.

SANS 10400-L: Slope of a (cast in situ) concrete roof should be achieved by casting the concrete to the required fall, eliminating the need for a screed which may be susceptible to cracking and resultant spreading of leaks.

Falls in flat timber roofs should be created in the rafter/beam design and not by raising purlins.

Show ridges, valleys and falls clearly in drawings.

SANS 10400-L Roofs stipulates a design fall of 1:50, allowing for construction inaccuracies and deflection under dead or imposed loads.

8.2 Preparation

falls

balconies

Ensure balconies are at a sufficiently lower level than door thresholds to allow for the screed or topping to be minimum 50 mm thick, and have sufficient fall to outlet(s).

Balustrades are best fixed to front of upstands.

Balcony door thresholds exposed to rain: waterproofing should be continued up against threshold and finished under door frame

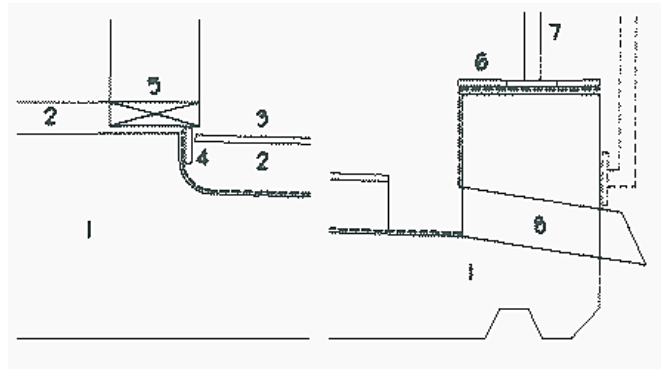


Diagram: Section through a balcony

1 concrete slab; 2 screed (optional); 3 tiles in adhesive on screed or bonded to waterproofing; 4 soft joint/sealant; 5 sliding door frame; 6 tiles bonded to waterproofing; 7 balustrade; 8 outlet.

outlets

Outlets set lower than their surroundings to prevent ponding: SANS 10400-L 4.3.2.4

SANS 10400-L: “attention should be given to the provision of ventilation to allow moist air, which might accumulate below the waterproofing layer, to be vented to the outside air”. Check with manufacturer/supplier.

8.3 Application

For basement construction see SANS 10021. Basement floors and walls may be tanked, or formed with a cavity construction combined with drainage or pumping, or both, or may be constructed with cavity drainage membranes.

8.3.2 Termination

Bonding waterproofing with DPC's should be considered in winter rainfall areas. DPC's should be the same material as the waterproofing and have sufficient overhang to facilitate overlapping and bonding.

Balcony door thresholds exposed to rain are a common cause of leakage. Waterproofing should be taken up against thresholds and finished under the door frame and sealed.

1.5 Waterproofing surface finishes/protection

Protection against UV degradation, traffic and hail prolongs life expectancy of membranes. No protection required to exposed bitumen membranes with slate granular or metal foil finishes.

8.5.1 Exposed non-trafficable areas

□ type finish/protection: see drawings

Paint / crushed stone / crushed stone on insulation panels / tiled insulation panels

paint

Acrylic does not adhere well to new bituminous-based systems.

crushed stone

A layer of gravel protects waterproofing and acts as anchor, but makes leaks difficult to trace. Thermal insulation value of gravel layer on its own is slight.

tiled insulation panels

Thermal insulation should be placed over the waterproofing ("inverted roof"), protecting it from high temperature fluctuation, ultraviolet degradation and mechanical damage, while allowing easy visual inspection of the waterproofing when laid loose.

Depending on tile mass, loose-laid tiled insulation panels should be installed only on flat roofs protected against wind by perimeter upstands. Tiles should be fully vitrified to withstand freeze-thaw cycles and should be sturdy enough to withstand handling and maintenance foot traffic. Panel size depends on multiples of tile size. Panels could float during heavy downfalls. Panels are easily removed for inspection and maintenance.

8.5.2 Pedestrian traffic areas

☐ type finish/protection: see drawings

topping / topping on insulation panels / tiles on screed / tiles on waterproofing / paving slabs on insulation panels / paving slabs on adjustable pads

Paving units are suitable for trafficable roofs, and for roof gardens and planters where waterproofing may be damaged by garden tools.

Paving on adjustable pads can be easily removed for inspection/repair, and the air space provides considerable thermal downward insulation. Paving slabs need to be sturdy, depending on traffic.

thermal insulation panels

☐ lay finish on thermal insulation panels: required / not required

tiles on waterproofing

☐ tile type, size: ...

See Section 12 Tiling.

paving slabs on adjustable pads

☐ paving surface levels: see drawings

8.5.3 Vehicular traffic areas

☐ type finish/protection: see drawings

50 mm premix laid directly onto waterproofing / brick or concrete pavers laid on 25 – 30 mm sand bed (see Section 21 External works) / 75 mm concrete paving on protection/slip layer (see Section 2 Concrete works)

8.5.4 Basement, retaining walls

☐ before backfilling, protect waterproofing with: softboard / hardboard / cavity drainage membrane / masonry leaf

☐ drainage system behind wall: ...

Omit if not agricultural drain encased in stone as specified.

8.5.5 Planters, roof gardens

☐ type finish/protection: 100–150 mm layer stone with geocomposite drainage layer with minimum mass of 210 g/m² laid on top / cavity drainage membrane laid directly on waterproofing.

Relevant standards:

SANS 10021 Waterproofing of buildings (including damp-proofing and vapour barrier installation).

SANS 10400-L Roofs.

BS.8102:2009 - Protection of Below Ground Structures against Water from the Ground.

GP Koning. *The Waterproofing of Buildings*. PO Box 26153 Hout Bay 76872.

9 Ceilings, linings, partitions, access flooring

To be published: SANS 2001- Construction Works Part EC1: Ceilings, partitions, access flooring.

9.1 Brandered ceilings

9.1.1 Branders, grounds

☐ type: timber / steel

timber branders/grounds

SANS 2001-CT2 (and SANS 10400-L) covers the fixing of timber brandering to roofing members to support ceilings that comprise gypsum plasterboard, fibre-cement board or similar boards only: "Brandering of size 38 mm × 38 mm required to support gypsum plasterboard, fibre-cement board or similar board shall be securely spiked to the supporting timbers with 75 mm wire nails. Cross brandering shall be cut in between the longitudinal brandering and skew nailed to the same, using 75 mm wire nails at centres that do not exceed 900 mm".

Grounds for wall linings: depth of 25 mm may be influenced by thickness of required insulation, services.

steel branders

Steel brandering is ideal for bulkhead construction.

☐ perimeter trim: standard / shadowline.

9.1.2 Fibre cement and gypsum board brandered ceilings

☐ type: fibre-cement / gypsum

fibre-cement board

Flat fibre-cement boards are made with organic fibres, plain or textured, and are water and fire resistant.

gypsum board

Gypsum board is non-comustible. Standard board should not be exposed to contact with water – do not use in industrial bathrooms or kitchens, or in exterior applications. For high moisture conditions use moisture resistant board. For fire resistance use X-rated board. Use double layers where acoustic insulation is required.

☐ type: standard / moisture resistant / fire rated

☐ edge: square / tapered

Use tapered edge board for scrim and plaster joints when full ceiling surface is not to be plastered.

cornices

☐ material, size: coved gypsum 75 mm wide / ditto 125 mm wide / coved polystyrene cornice / foam moulded / hardwood / softwood, profile ...

cover strips

☐ joint cover strips: H-profile: prepainted galvanized steel, aluzinc or plastic / gypsum board / hardwood: specie ...; profile, size: see drawings

Omit if ceiling is plastered.

fixing

☐ board pattern: see drawings

Omit if not visible or default (symmetrical about room) is acceptable.

☐ position of movement/control joints: see drawings

movement/control joints should be a clean break of 15 mm through the complete ceiling structure and finish.

finish

☐ finish to plaster board ceiling: plain with cover strips / plain with plastered joints / entire ceiling plastered

9.1.3 Wood board brandered ceilings, linings

☐ type of board: tongue and groove / strip / plywood / perforated plywood

tongue and groove board (SANS 1039)

☐ species: softwood / hardwood / species ...

☐ grade: clear / select / knotty

☐ profile: see drawings

See SANS 1039 for various profiles.

- ☐ face width: 50 / 65 / 75 / 102 / 140 mm
- ☐ thickness: ceiling board: 12 / 16; panelling 12 / 16 / 22 mm

wood strip, trim

- ☐ strip spacing: see drawings

plywood

- ☐ exposure class: 1 / 2 / 3 / 4

1 (exterior); 2 (semi-exterior); 3 (humid interior); 4 (dry interior).

- ☐ veneer species: ...
- ☐ cut: rotary / sliced
- ☐ grade: S / A / B

S (select, for decorative applications), A (furniture, for joinery where it may be reworked), B (standard, to be covered, coated or painted).

- ☐ perforations: size, spacing: ...

For effect and/or acoustic control.

fixing

- ☐ position of ceiling: see drawings

above / in between / below roof beams

- ☐ strip spacing: ...
- ☐ cornice, trim size and profile: ...

9.1.4 Hatches

- ☐ position of ceiling hatches: see drawings

See note on geyser position under Section 18.

- ☐ trap door: hinged / laid loose

9.2 Suspended ceilings

Consult SABISA (South African Building Interior Systems Association, part of the AAAMSA group).

- ☐ type: board / fabric / louvre / grid / bulkhead
- ☐ material: mineral fibre / metal / ...

performance

- ☐ required fire resistance in minutes: see drawings

20 / 30 / 60 / 90 / 120 / 180 / 240

See also note under 9.3.

- ☐ required airborne sound insulation grading dB: see drawings

30 / 35 / 40 / 45 / 50

For noise measurement and rating consult SANS 10103.

See also note under 9.3.

board

- ☐ type: plain / perforated / smoke-tight / impact-proof (e.g. ball) / removable / fold-down / drop-and-slide
- ☐ material: mineral fibre / gypsum / fibre cement / metal / vinyl clad / grid / flush plaster
- ☐ mineral fibre edge: square / revealed square / bevelled concealed / concealed



- ☐ size: see drawings
- ☐ colour: ...
- ☐ texture: plain / fissured / perforated
- ☐ finish: ...
- ☐ ceiling panels: removable and replaceable from below / fixed / as required for maintenance

suspension fittings

- ☐ suspension system: patent / rational design

installation

- ☐ grid pattern: see drawings

access

- ☐ access: see drawings

Access depends on hold-down system, panel removability, access requirements to above-ceiling services, weight of ceiling panels. Discuss with manufacturer/supplier.

9.3 Partitions, linings

- ☐ type: see drawings

drywall / light weight internal wall / demountable / cubicle / operable

performance

- ☐ required fire resistance in minutes: see drawings

20 / 30 / 60 / 90 / 120 / 180 / 240

Fire resistance: SANS 10400 Part T classifies the performance of materials in respect of fire resistance in categories of 20, 30, 60, 90, 120, 180 and 240 minutes. Architect/*Competent Person* to specify. Fire resistance is achieved by increasing layers of board. Deflection requirements are achieved by multiple studs reinforced with layers of board. Check with SABISA.

- ☐ required sound insulation grading dB: see drawings

30 / 35 / 40 / 45 / 50

30 (normal speech audible, but unintelligible), 35 (loud speech understood), 40 (loud speech audible, but unintelligible), 45 (loud speech barely audible), 50 (shouting barely audible)

Comparable constructions: 26 (solid wood door without seals), 32 (6 mm laminated glass), 42 (100 mm brick wall), 48 (230 mm hollow concrete wall).

For noise measurement consult SANS 10103.

9.3.1 Materials

gypsum plasterboard

- ☐ type: wallboard / moisture resistant wallboard / high-temperature wallboard

Moisture resistant board for use in all wet areas such as bathroom showers as well as locations with high humidity levels.

- ☐ thickness: 12 / 15 mm
- ☐ type of edge: square / tapered / bevelled / rounded
- ☐ covering: paper backed vinyl of weight in g/m² : ...

fibre cement board

- ☐ type: MD / HD

flat unpressed (MD), flat pressed (HD).

- ☐ thickness: 9 mm

studs and tracks

- ☐ material: metal / wood

aluminium extrusions

- ☐ abrasion resistance: required / not required
- ☐ colour: natural / anodized

anodising

- ☐ anodising grade SANS 1407: AG10 / AG15 / AG20 / AG25

grade AG10 (0,1 mm thick), for interior use only; AG15 and 20 for mild atmospheric conditions; AG25 where little or no deterioration is permitted. According to ASFA (Aluminium Surface Finishers Association), SANS 1407 is suitable for internal use only.

- ☐ abrasion resistance when relevant: required / not required
- ☐ colour: ...

powder coating

- ☐ SANS 1274 type: 1 / 2

1 (heavy duty interior), 2 (interior and non-corrosive conditions).

- ☐ colour: ...
- ☐ finish: matt / satin / high gloss / hammertone / textured

glass

- ☐ type: see drawings

float glass / wired / patterned / safety

See GLAZING

- ☐ thickness: see drawings

9.3.2 Drywall partitions, light weight internal walls

- ☐ framing: timber / steel
- ☐ cladding: gypsum board / fibre cement board
- ☐ gypsum board cladding finish: vinyl / paint / tile

For cladding finish of appropriate type to suit expected traffic in designated areas, refer to manufacturer for recommendations.

- ☐ door/window frame finish: anodising / powder coating
- ☐ glazing: clear / opaque / patterned / safety

9.3.3 Demountable partitions

- ☐ framing: steel / aluminium
- ☐ exposed frame finish: anodized aluminium / powder coating
- ☐ cladding: gypsum plasterboard / melamine-faced board / ...
- ☐ cladding finish: vinyl / paint
- ☐ glazing: clear / opaque / patterned / safety

9.3.4 Cubicle partitions

- ☐ mounting: flush floor / raised on stainless steel stiles
- ☐ panels: vitreous enamel / melamine faced
- ☐ hinge type: normal butt / rising butt
- ☐ accessories: indicator bolt / coat hook / ...

9.3.5 Operable partitions

- ☐ operation: individual panels / hinged paired panels
- ☐ accessories: pass doors / work surfaces (chalkboard, dry marker board, tackboard) / pocket doors (to hide stacked panels).

9.4 Raised access flooring

Annex B and C of SANS 1549 gives information on quality verification of components; electrical properties; fire protection and safety; special panels; surface of completed installation; moving and placing of safes and other heavy equipment.

NOTE: this standard has been withdrawn but is regarded by industry as superior to the new (European) standard (SANS 52825). Check with supplier.

- ☐ required fire resistance in minutes: see drawings

20 / 30 / 60 / 90 / 120 / 180 / 240

See note under Section 9.3.

- ☐ required sound insulation grading in dB: see drawings

30 / 35 / 40 / 45 / 50

See note under Section 9.3.

- ☐ class: A / B / C

Class: A, B or C depending on static or dynamic loads. Check with manufacturer.

- ☐ floor panel covering: heavy duty high pressure laminate on particle board P6 / textile / ...
- ☐ degree of corrosion resistance if other than default : ...
- ☐ clear height to underside of floor: see drawings
- ☐ required life of covering: ...

- ☐ details of special floor panels: see drawings
- ☐ whether floor assembly forms part of a plenum system: ...
- ☐ lifting devices: required / not required.

Relevant standards: SANS 10400-L Roofs.

SANS 10218 Acoustical properties of buildings.

SANS 10103 The measurement and rating of environmental noise with respect to annoyance and to speech communication.

SANS 52825 / EN 12825 Raised access floors.

ETENDER

10 Windows, doors, curtain walls, skylights, solar control

10.1 Performance

mechanical performance

☐ site category: 1 / 2 / 3 / 4

Design wind pressure must be specified in terms of SANS 10160. It is derived from the site category and height above ground. Site categories are: 1: open sea, lake shores, flat treeless plains; 2: airfields, parklands, farmlands, outskirts of towns and suburbs; 3 and 4: built-up areas or city centres.

☐ height above ground: ...

☐ plastic, shrinkage and creep deflection of floor slabs: ...

Omit if not relevant. If relevant (curtain walling/ window walling), deflection of floor slabs MUST be specified by a structural engineer.

thermal performance

☐ fenestration unit conductance: see drawings

☐ fenestration unit SHGC: see drawings

Actual Conductance and SHGF-value test results for fenestration units may be obtained from the South African Fenestration and Insulation Energy Rating Association (SAFIERA), representative of the National Fenestration Rating Council (NFRC) in the USA.

fire resistance

☐ fire resistance: ...

sound insulation

☐ sound insulation: ...

General requirements

☐ type: see drawings

residential / industrial / stock / purpose made

☐ type opening section: see drawings

casement / sliding / sash / tilt-and-turn / pivot

☐ handing, whether viewed from inside or outside, including proportion of vertically pivoted casements that opens outwards: see drawings

☐ frame material: see drawings

hot-rolled steel / cold-rolled steel / pressed steel / aluminium / wood / polymer / polymer concrete / composite

Aluminium is durable with low maintenance but highly heat conductive – frames with thermal breaks are acceptable. Wood has good insulating values and strength, but needs regular maintenance. Polymer frames are maintenance free with good insulation value.

☐ glazing from inside: see drawings

For windows not accessible from outside.

☐ shape and size: see drawings

☐ glazing bars: see drawings

☐ burglar bars: ...

to all opening sections / to complete window

Ensure extent to which operable sections can open is acceptable.

pattern: see drawings

☐ insect screens: see drawings

☐ glazing: see drawings

See Section 17.

☐ sealants and seals: ...

see Section 6.

☐ hardware and fixings: see drawings

Hinges (ordinary or projecting), handles, stays, catches, bolts etc.: see also Section 16.

☐ additional security devices: ...

building in

Best way to fit single aluminium frame units is to build in steel or timber subframes, finish all wet trades, and fit window or door at last possible stage. If built in early, protection of frames against damage is required. Another good method is to build and finish openings and make and fit frames to measure – thus also making it possible to fit at last possible moment. Screw fitting of frames can only be done before glazing. Discuss with supplier/installer.

10.3 Steel frame units

☐ factory finish: primed / hot dip galvanized

See notes on zinc coating under Structural Steelwork.

10.3.1 Hot-rolled steel framed units (SANS 727)

Hot-rolled steel frames are not thermal performance rated and will not meet air leakage requirements as specified in SANS 10400 XA or SANS 613 without weather seals. See also cold-rolled steel framed units.

10.3.2 Cell windows

All manganese bars shall display the trade mark TISAT3030tm visible for identification on site.

10.3.3 Pressed steel clisco type window frames (SANS 1311)

☐ type: A / B

A (single rebate surround) / B (double rebate surround)

10.3.4 Pressed steel door frames (SANS 1129)

☐ type: see drawings

single leaf door without fanlight / ditto with fanlight / double door without fanlight / ditto with fanlight / door and frame combination

☐ material of lock strike plate: chromium/cadmium plated steel / brass

☐ hinges: steel / brass

☐ handing: see drawings

☐ size: see drawings

☐ type of profile: see drawings

single rebate / double rebate / half wall width / full wall width

☐ fanlight: see drawings

fixed, with glazing beads / opening hinged bottom / opening hinged top

☐ type of lock/latch: see drawings

additional clauses

Frames for power floated floors need to be shorter, and temporary bracing has to be removed after fixing.

10.4 Cold-rolled steel frame units

Cold rolled steel frames may meet air leakage requirements as specified in SANS 10400 XA or SANS 613. Check with manufacturer/supplier.

10.5 Aluminium frame units

☐ performance class: A1 / A2 / A3

A1 (residential and light commercial); A2 (commercial); A3 (monumental).

Aluminium framed windows, doors and shopfronts manufactured according to the minimum requirements of the Association of Architectural Aluminium Manufacturers of South Africa (AAAMSA) are mark-bearing with the mark and number of the test certificate issued by AAAMSA. Consult AAAMSA General Specification for Glazed Architectural Products (Including Energy Efficiency Design for Fenestration).

☐ frame surface finish: anodised / powder coated / liquid organic coated

Anodising is a harder and more abrasion-resistant finish than powder coating, but has a limited choice of six colours (natural through four shades of metallic bronze to black). Colours are light fast but never identical and virtually impossible to match with older or other finishes. Anodising is susceptible to mortar and lime attack during construction. Consult AAAMSA or the Aluminium Surface Finishers Association (ASFA) for the selection of anodized and powder coating thicknesses.

☐ anodising grade: AA15 / AA25

Grade: AA15 (0,015 mm thick, for mild atmospheric conditions in rural environments), AA25 (0,025 mm thick, for polluted atmosphere, sites within 5 km from chemical plants, coastal regions within 25 km from the sea, marine conditions, windy areas where sand causes abrasion). See AAAMSA Surface Finishes.

- ☐ powder coating colour: ... ; gloss category/finish: mat / satin / high gloss / hammertone / textured.

10.5.1 Windows and glazed doors

- ☐ colour of gaskets and weatherstrips: black
- ☐ weatherstrips: renewable.

10.5.2 Skylights

No national standard on skylights exists. The Skylight Association of Southern Africa (SASA, part of the AAAMSA group) is the industry representative body. Consider heat transmission, glare, UV radiation and ventilation carefully. Provide *drawings* at time of tender, if available.

- ☐ type, shape: see drawings

sloped / pitched / arched / domed / single / composite / openable

- ☐ size: see drawings

SANS 10400-L: "skylights shall have a maximum opening area of 0,6 m² or, if in the form of a translucent roof sheet, an installed width of 700 mm".

- ☐ slope: see drawings

To ensure proper condensation and water infiltration control, and to minimize the accumulation of dirt, inclination of glazing materials should be 15° minimum. Sloping glazing to have sufficient overhang to shed rainwater from significant vertical surfaces.

- ☐ frame: powder-coated steel / natural aluminium / anodized aluminium / powder-coated aluminium / painted wood / varnished wood
- ☐ glazing: glass / polycarbonate / acrylic
- ☐ mounting: flush / curb / integral
- ☐ fixed or operable: ...

10.5.3 Curtain walling

- ☐ curtain walling type: ...

site assembled continuous mullions with discontinuous transoms with infill glazing and panels / prefabricated units of framework, glazing and panels / rational design / submit proposals

- ☐ curtain walling panel construction: ...

external finish / internal finish / core insulation / combustability / surface fire spread.

10.6 Adjustable glass louvre windows

- ☐ operation: manual / remote control.

10.7 Wood frame units

No national standard exists on wood frame doors and windows, but check compliance with SANS 613. Wood frames should be protected from rain by adequate roof overhangs or extended lintels with drips.

- ☐ wood species: ...
- ☐ profile and dimensions: see drawings

10.8 PVC-U frame units (SANS 1553)

- ☐ profile and dimensions: see drawings
- ☐ surface finish: matt / glossy.

10.9 Polymer concrete frame units

- ☐ profile and dimensions: see drawings
- ☐ surface finish: ...
- ☐ sub- and opening frame material: aluminium / cold rolled steel.

10.10 Wood doors (SANS 545)

- ☐ type of door: see drawings

balanced / batten / flush / casement / prehung / security-view / louvre / patterned / screen / sliding / special / stable / cupboard / X-ray / single / paired single swing / paired double swing

☐ dimensions: see drawings

610 / 762 / 813 / 864 mm x 457 / 2032 x 40/44 mm

457 mm high doors for cupboards. Entry doors for disabled persons in wheelchairs must be at least 813 mm wide.

☐ handing: see drawings

Hand refers to position of hinge when door opens towards viewer. Show first opening leaf of paired doors when important.

☐ exposure class: see drawings

2 / 3 / 4

2 (semi-exterior, partly or wholly exposed at infrequent intervals to unprotected open air conditions); 3 (humid interior); 4 (dry interior). Note there is no exposure class 1. Hardwood framed and braced batten doors are heavy duty doors, suitable for exposure class 2.

flush panel doors

☐ performance class: see drawings

LD / MD / HD

LD (light duty, hollow core) / MD (medium duty, semi-solid core) / HD (heavy duty, solid core)

Solid core flush panel doors are heavy duty doors suitable for dry interior use only – specify for frequent use and abuse, e.g. schools, public places, hospitals.

Semi-solid flush panel doors are medium duty doors suitable for dry interior use only - specify for general use in office blocks, dwellings, barracks and single quarters, including cupboard doors.

Hollow core flush panel doors are light duty doors suitable for dry interior use only – specify for dwellings or cupboard doors in dwellings only.

☐ any special properties: ...

☐ finish, and wood species when relevant: see drawings

fibre board / sapele mahogany veneer / plywood / coating

Do not specify veneer when door is to be painted. Other commercial veneer species: maple, cherrywood, beech – check with suppliers.

10.11 Fire doors and fire shutters (SANS 1253)

☐ class (fire resistance in minutes) : see drawings

A / B / C / D / E / F

A (60 min) / B or C or D (120 min) / E or F (30 min)

☐ type door: see drawings

single / double / swing / sliding

Manually operated sliding fire doors are normally parked in open position, closing only in event of a fire by means of a fusible link or electric magnet.

☐ type of closing device: see drawings

fusible link / electric magnet

Electrical operation is recommended for larger doors that are frequently used.

☐ handing: see drawings

Doors forming part of fire escape routes must open in direction of route.

☐ size: see drawings

Maximum 4 x 4 m.

☐ finish: see drawings

hardboard / galvanized steel cladding

Galvanized steel for heavy duty and external doors or corrosive conditions.

10.12 Garage doors

☐ type: up-and-over / sectional overhead / sliding / swing

☐ size: single / double

- ☐ framework material: steel / wood
- ☐ cladding/boarding material: hardwood / aluminium / prepainted galvanised steel / primed steel
- ☐ operation: manual / electric / chain drive / hand crank
- ☐ finish: varnish/sealer / paint / powder coated / anodised / epoxy coated
- ☐ locking devices: chrome plated centre lock with spring loaded side catches, interior/exterior padlock bolt and keep / automated (no locking device required)

sectional overhead doors

- ☐ panels: aluminium / aluminium/zinc / galvanised mild steel / prepainted galvanised mild steel / hardwood / glass
- ☐ specialised applications for solid doors: fire-doors SANS 1253 class ... / with fusible link, permanently open / gas leak proof / tornado wind resistant / high-frequency / petrol bomb resistant / acoustic control.

10.13 Roller shutter doors

Roller shutter doors are *suitable* for from counter closures to aircraft hangars, and may be used for security, fire, smoke, gas, wind and bomb control.

Push-up operation is limited to 7,5 m²; chain 8 – 30 m²; crank to 25 m²; electrical to any size.

- ☐ size: see drawings
- ☐ operation: push-up / chain / crank / electric
- ☐ slats: steel / aluminium / solid / see-through/ventilated / double wall / grille / with end-locks
- ☐ grill pattern: ...
- ☐ finish: mill / hot dip galvanised / wet spray / anodised / powder coated
- ☐ canopy enclosing rolling mechanism: required / not required
- ☐ bottom bar in case of sloping floor: sloping / with flexible weatherstrip
- ☐ locking devices: side bolt at waste height / external pad bolt / centre lift lock with external key and internal knob operation / floor level four point slide bolts
- ☐ wicket door 685 x 1830 mm: opening in / opening out
- ☐ additional features required: card readers / inductive loop circuits / automation
- ☐ specialised applications for solid doors: not required / fire-door SANS 1253 class ... / with fusible link, permanently open / gas leak proof / tornado wind resistant / high-frequency / petrol bomb resistant / floor shutter / acoustic control .

10.14 Strongroom/record room doors, ventilators

- ☐ type: see drawings

strongroom / vault / record room

strongroom and vault doors (SANS 949)

- ☐ category strongroom doors: 1 / 2 / 2 ADM

Category: 1 (fire resistance 30 minutes, entry resistance 15 minutes), 2 (30 minutes, 1 h), 2 ADM (anti-disc cutter material)

- ☐ category vault doors: 1 / 2 / 2 ADM / 3 / 4 / 5

Category 3, 4 and 5 resist increasing levels of attack.

- ☐ dimensions: see drawings
- ☐ fittings: see drawings
- ☐ handing: see drawings
- ☐ type and number of locks if other than specified: ...
- ☐ factory finish: primer only / baked enamel / hammertone

fire-resisting record room doors (SANS 1015)

- ☐ type of lock if other than specified: ...
- ☐ finish: baked enamel / hammertone.

10.15 Solar control

- ☐ type: internal / external / fixed / retractable / awning / canopy / blind / louvre
- ☐ material: fabric / metal / concrete / glass

- ☐ fabric: UV-resistant, washable, rot-proof

visible transmission: ...

solar transmission: ...

- ☐ metal: aluminium / prepainted hot dip galvanized steel
- ☐ louvre: fixed / adjustable
- ☐ operation when relevant: manual / automated / from inside.

Relevant standards:

SANS 10400-O Lighting and Ventilation.

SANS 204 Energy efficiency in buildings

ETENDER

11 Plaster, screeds, toppings, terrazzo

11.1 Plaster

- ☐ type: see drawings

cement plaster / gypsum plaster / lime plaster / insulating plaster / barite plaster / waterproof plaster.

11.1.1 Cement plaster (SANS 2001 EM1)

SANS 2001- Construction Works Part EM1: Cement Plaster Admixtures are not permitted in cement plasters to improve workability or improve the properties of the finished plaster.

Specification data:

- ☐ application: single coat / multicoat
- ☐ finish to cement plaster: smooth / textured / roughcast / bagged / skimmed

Show in drawings: V-joints through full plaster thickness at dpc level and where different materials meet; metal lath strips over roof anchors on single leaf masonry walls, or across joints between different materials – see SANS 2001-EM1.

11.1.2 Gypsum plaster

Do not mix gypsum-based plaster with plaster made with common cement – the sulphate compound in gypsum attacks common cement paste.

11.1.4 Insulating plaster

- ☐ low density aggregate density range: 60 – 160 / 120 – 240 / 450 – 720 kg/m³

60 – 160 (exfoliated vermiculite); 120 – 240 (perlite); 450 – 720 (foamed slag).

Omit if default (800 – 960 kg/m³ (clinker) covered in SANS 2001-EM1) is acceptable.

Barite plaster for use in X-ray rooms. Thickness for general diagnostic X-ray work normally between 15 and 30 mm. Check mix and thickness with requirements.

11.1.6 Accessories

- ☐ expanded metal, type: sheet/plate / angle bead / base bead / corner mesh / plaster lath / plaster stop / rib lath / strip mesh
- ☐ angle rounded corner protection: 1 500 x 1,0 x 35 mm girth strip, position: see drawings.

11.2 Screeds, toppings, terrazzo

To be published: SANS 2001-EM2 Screeds and toppings.

Screed is a layer of a well-compacted mixture of cement and fine aggregate applied to a concrete base, *suitable* for receiving a floor finish.

Topping is a layer of high-strength concrete designed to provide a dense, abrasion-resistant surface on a concrete base.

Terrazzo is a hard-wearing decorative concrete finish in which crushed or uncrushed aggregate like marble and pigments is used, and of which the surface is generally ground and polished.

Specify screed or topping only where a direct-finished one-course concrete floor is impracticable.

11.2.1 Materials

proprietary surface treatments

Treatments to harden or seal the surface of toppings are not normally required, provided a sufficiently high grade of properly finished concrete is used. They may however be useful in dust sensitive areas or where oil spills or mildly acidic solutions may occur. Expert advice should be sought from the manufacturer/supplier.

- ☐ form: dry shake / coating / screed
- ☐ to improve: abrasion resistance / chemical impact resistance / slip resistance / density / UV resistance
- ☐ colour/finish: ...

mesh reinforcement

- ☐ mesh reinforcement: ...

Mesh reinforcement may be required to restrain differential shrinkage stresses and control cracking on precast concrete elements – not normally required.

water

☐ water: SANS 51008

Omit if default (drinking water) is acceptable.

11.2.2 Mix

topping

☐ concrete grade: see drawings

20 / 30 / 40 / 50

Topping: 1 part cement to 1½ parts sand to 1½ parts stone would produce a concrete strength of 25 – 30 MPa. Use concrete of at least grade 20 where abrasion resistance is not a consideration; grade 30 for floors for light duty industrial and commercial purposes; 40 for ditto medium duty; 50 for heavy duty industrial, workshops, special commercial; very heavy duty engineering workshops would require a proprietary topping. Consult The Concrete Institute for advice.

11.2.4 Laying

Method of laying as described here is known as "separate bonded construction", where the topping or screed is laid on and bonded to a hardened base. For other methods, for example monolithic construction, and separate unbonded construction, consult SANS 10109 part 2.

Compaction of the mix is most important. Stiff semi-dry mixes not well compacted are a common cause of bond failure. Compact stiff mixes with power-operated equipment such as vibrating screed boards.

Joints in screeds should be minimal. Screeds laid in large areas may crack, but this is more acceptable than curling at edges of small panels.

☐ screed thickness: see drawings

25 – 50 mm

☐ topping thickness: see drawings

25 – 40 mm

☐ edge/feature/dividing strips: see drawings.

11.2.5 Finishing

☐ type of finish: ordinary / hard / colour pigmented / dry shake / surface ground and polished

Ordinary finish is *suitable* for surfaces that are to be covered by flooring. Hard finish is *suitable* for surfaces that are not to be covered with flooring and for toppings that require high resistance to wear (grade 30 and higher).

Hardwearing surfaces like toppings and terrazzo may be ground and polished – not recommended for sand:cement screeds. Grinding tends to create lower slip resistance. Grinding will affect appearance and will remove surface treatments such as dry shakes.

☐ surface smoothness: smooth / non-slip

pigmentation

☐ type: integral (mix with dry cement) / add to freshly laid surface as a dry shake / not required.

11.2.6 Joints

☐ type: isolation joint / intermediate sawn contraction joint / patent movement joint

☐ pattern: see drawings

☐ seal joints: required / not required

☐ patent movement joint system with flexible inserts: aluminium / stainless steel / PVC

Material depends on nature and intensity of traffic. Joints should be sealed when floor is subjected to liquids, hygiene.


11.2.7 Surface regularity

☐ degree of surface regularity: I (3 mm) / III (10 mm over 3 m in any direction)

Omit if default (II) is acceptable. Check with SANS 10155. In small rooms deviation should be less.

11.2.8 External thresholds

Placing the door in line with the inside wall face allows the joint to be under the door and adds a measure of rain protection to the detail.

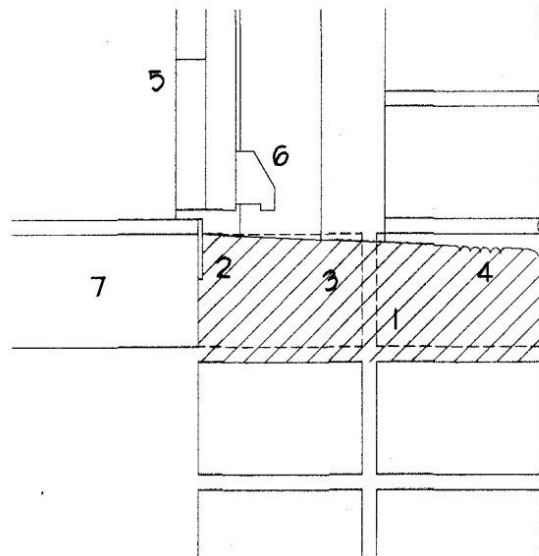

- 1 break out bricks
- 2 metal edge strip
- 3 in situ or precast concrete threshold with slight fall
- 4 reeding
- 5 external door
- 6 weather bar
- 7 concrete surface bed

11.2.13 Surface sealing

☐ seal floor surface with: one coat non-slip wax polish / epoxy / not required.

Relevant standards:

SANS 10109 Part 2 Finishes to Concrete Floors.

Concrete Basics for Building. 2004. Cement and Concrete Institute.

12 Tiling

12.1 Materials

- ☐ type of tile: see drawings

ceramic / stone / concrete / terrazzo / mosaic

ceramic wall and floor tiles (SANS 1449/13006)

- ☐ group: A1 / A2 / A3 / A4 / B1 / B2 / B3 / B4 / C

Group A (extruded split/quarry tiles) and B (dust pressed tiles) are classified according to their water absorption properties. C=other. Group A1 and B1 have the lowest water absorption ($\leq 3\%$). Fully vitrified porcelain tiles, covered by SANS 13006 only, are frost resistant and suitable for cold rooms etc.. Not all manufacturers produce to SANS 13006.

- ☐ surface: glazed / unglazed
- ☐ shape, pattern, colour: ...
- ☐ nominal dimensions: see drawings

200 x 200 / 300 x 300 / 400 x 400 / 500 x 500 mm

- ☐ grade: first grade / second grade

Second grade tiles have minor blemishes.

- ☐ glazed tile abrasion resistance class: 1 / 2 / 3 / 4 / 5 / not required

Abrasion resistance class to SANS 13006: 1 for interior soft domestic footwear such as bathrooms and bedrooms; 2 for interior light domestic traffic such as living rooms; 3 for interior and exterior areas such as domestic kitchens, halls and terraces, and low-traffic commercial areas; 4 for frequent traffic such as public entrances, shops, hospitals, hotel kitchens and exhibition rooms; 5 for severe pedestrian traffic such as shopping malls, airport concourses, sports stadia and factories.

- ☐ slip resistance value (coefficient of friction) : dry ..., wet ... / on stairs and ramps only

For slip resistance, contact manufacturer. Slip resistance is important in public places and on ramps and a requirement for disabled people (SANS 10400-S). Several test methods exist. The Pendulum Test Value (PTV) to BS 7932 is acceptable. PTV 0–24 is high, 25–35 moderate, 36+ low slip potential. A calibrated tester is available in SA. Slipperiness is also affected by use, water, spills and floor care.

- ☐ acid and alkali resistance of glazed tiles: type of chemical ... / not required

stone tiles

No local standard exists on natural stone tiles. Consult supplier/installer.

- ☐ type: natural stone / cast stone
- ☐ natural stone: slate / quartzite / marble / granite
- ☐ slip resistance value (coefficient of friction) : dry ..., wet ... / on stairs and ramps only / not required

For slip resistance contact manufacturer.

- ☐ nominal dimensions: see drawings

300 x 300 / 450 x 450 / 600 x 600 x 50 / 65 mm

- ☐ shape: ...; colour: ...

concrete tiles

- ☐ type: concrete / terrazzo
- ☐ nominal size: see drawings

300 / 450 / 600 x 300 / 450/300 / 600/450 x 50 / 65 mm

mosaic

- ☐ material: ceramic / glass / stone
- ☐ appearance: glazed / unglazed
- ☐ colour: ...
- ☐ size of tesserae: ...

grout

- ☐ proprietary grout: cement-based / organic-based / reaction resin (epoxy)

Epoxy grout e.g. in food storage and preparation and processing areas, abattoirs, breweries, dairies, bottling plants, restaurants, industrial kitchens, hospitals and clinics.

profiled and decorative tiles

- ☐ profiled and decorative tiles: see drawings

skirting / dado / bullnose

accessories

- ☐ edging, trim, stair nosing and movement joint strip material: PVC / aluminium / brass / stainless steel

see also Section 16.

- ☐ profile, size, colour: ...

12.2 Tiling

To be published: SANS 2001-ET Tiling.

bedding

- ☐ external angles: see drawings

mitred / lapped / strip edged / bullnose tile

- ☐ internal sills in bathrooms: see drawings / level / sloping

Sloping sill to prevent internal sills being used as a shelf.

External sills should be tucked in under all window frames - fixed in front of window frame will lead to moisture damage in exposed conditions. See also SANS 2001-CM1.

- ☐ field, border, pattern: see drawings.

12.3 Jointing

Floor tiling joint width may be subject to manufacturer's recommendations, irregularities in the tiles, modular discipline or decorative effect.

Extruded tiles require a wider joint to cater for distortions.

In internal work, laser cut natural or cast stone of precise dimensions may be butt jointed with little or no grout.

- ☐ joint width: ...

Omit if default widths are acceptable.

12.4 Movement joints

- ☐ type: formed in situ / preformed strip / isolation joint / intermediate joint / structural joint

preformed compression joint strip

- ☐ material, colour: PVC / aluminium / brass / stainless steel / ...

Preformed joint strip: PVC is suitable for light traffic, stainless steel for heavy traffic. Check whether chemical resistance is required.

isolation (perimeter) joints

Isolation joint design depends on the wall finish, skirting, hygiene requirements and floor cleaning method, e.g. if regularly washed.




Diagram: Isolation joint where hygiene is important (SANS 10107).

structural joints

In practice structural substrate joints are often not true. Ignoring this fact will result in a tiling joint not uniformly coinciding with the base joint, leading to cracks. Possible solutions are:

- a) if the joint is out of line but straight, consider continuing the joint through the tiling (the joint will not be aligned to the tile joints, but will at least be straight), or
- b) if the joint is irregular within a narrow straight band, consider installing a prefabricated flexible metal joint capable of spanning the irregularity, or
- c) if the joint is out of line and irregular, consider leaving out the row(s) of tiles in which the troublesome joint occurs, and lay the row of tiles over an underlay or in a permanently flexible adhesive, or lay a different flooring material over the joint which is able to accommodate the expected movement, e.g. carpet, thermoplastic, wood or laminate. Reinforce the edges or, in the case of rigid materials, seal both sides of the strip covering the structural movement joint.

Relevant standard: SANS 10107 Design and Installation of Ceramic Tiling.

13 Floor coverings, wall linings

☐ type: see drawings

thermoplastic / wood / textile / epoxy.

13.3 Thermoplastic and similar flexible floor covering

To be published: SANS 2001-EF3 Resilient thermoplastic and similar flexible floor covering.

Consider slip-resistant and tactile floor finishes for disabled persons. See SANS 784 for guidance.

13.3.1 Materials

☐ type: see drawings

vinyl / linoleum / rubber

semi-flexible vinyl floor tiles

☐ tile thickness: 2,0 / 2,5 / 3,2 mm

SANS 581: type of semi-flexible vinyl flooring: 120, 130, 160, 200 (domestic), 250 (heavy traffic), 320 (extra heavy traffic).

pattern: none / marbled / mottled

chemical resistance: ... ; type of chemical ...

flexible vinyl flooring

☐ tile thickness: 2,0 / 2,5 / 3,0 mm

SANS 786: type of flexible vinyl flooring: 125 (1,25 mm, domestic light), 160 (domestic), 200 (commercial, domestic heavy), 250 (industrial light, commercial heavy), 300 (industrial), 320, 360 (industrial heavy).

form: sheet / tile

pattern: none / marbled / mottled

chemical resistance: ... ; type of chemical ...

linoleum sheeting or tiles

Linoleum is manufactured by mixing linseed oil with wood or cork powder, resins, ground limestone and mineral pigments, rolled out onto a jute backing and cured.

☐ thickness: 2,0 / 2,5 / 3,2 / 4,0 mm

☐ form: tile / sheet

☐ shape, size, of tile: ...

☐ colour: ...

☐ finish: unfinished / coated

rubber sheeting or tiles

Recycled and natural rubbers are "green". Recycled rubber lasts longer. Rubber floors are suitable for sport and industries. Interlocking tiles are interchangeable.

☐ form: tile / interlocking tile / sheet

☐ shape, size of tile: 300 x 300 to 500 x 500 mm

☐ texture: plain / studded / diamond

☐ colour: plain / patterned / speckled

☐ installation method: glued / interlock floating

accessories

☐ skirtings: extruded PVC , height: ...

☐ trim, movement joints: extruded PVC / aluminium / brass / stainless steel

☐ nosings: extruded PVC / rubber / extruded aluminium with non-metallic slip-resistant inlays / solid wood

13.3.2 Laying

☐ pattern: see drawings / straight joints in both directions

• finishing

☐ polymer floor dressing type: 1 / 2

Floor dressing type 1 produces hard coating; type 2 produces soft coating.

13.4 Wood flooring, solid and laminate, on solid substrates

To be published: SANS 2001- EF1 Wood and Laminate Floor Covering.

For the installation of timber suspended floors see Section 4 Structural timber (flooring).

Solid wood floors may be sanded several times during their life span.

Wood and laminate flooring is laid directly on solid cementitious substrates. Solid wood floors are glued or nailed to battens. Laminate floors are floating floors assembled by using a patent click lock system. Wood and laminate floors expand and contract – do not use in wet areas.

SAWLFA South African Wood and Laminate Flooring Association is the industry representative body.

☐ traffic class: 21 / 22 / 23 / 31 / 32 / 33

See SANS 10043 table 1 for a traffic classification according to EN 13329: 21 (domestic moderate, e.g. bedrooms), 22 (domestic general, e.g. living rooms), 23 (domestic heavy); 31 (commercial moderate, e.g. conference rooms, offices), 32 (commercial general, e.g. offices, hotels, classrooms), 33 (commercial heavy, e.g. corridors, stores, schools, halls, open plan offices).

See SANS 10043 table 6 for traffic, hardness, density and shrinkage classification of flooring timbers in common use.

13.4.1 Materials

Solid wood floors may be sanded several times during their life span.

☐ flooring type: see drawings

solid wood strip/block / solid wood parquet/mosaic / plywood / faced plywood or fibreboard / melamine laminates

solid wood strip, block, parquet, mosaic

SANS 281 *Hardwood block and strip flooring* and SANS 978 *Wood mosaic flooring* were withdrawn in May 2009 and not replaced.

☐ species: ...

☐ grade: clear / figured

☐ preservative treatment: ...

Note that some woods are naturally durable.

☐ second-hand blocks: allowed / prohibited

☐ prefinishing: required / not required

faced plywood or fibreboard

☐ facing: natural hardwood / cork / bamboo

☐ species: ...

☐ prefinishing: required / not required

decorative melamine laminate

☐ pattern, colour: ...

☐ built-in underlay: required / not required

☐ prefinishing: required / not required

underlays

☐ required insulating underlay function: acoustic / thermal / noise control / impact (sports)

☐ polyethylene elastic-adhesive underlay:

This is an imported underlay with several advantages, not requiring gluing, nailing or clipping of the floor boards. Check with supplier.

density: 30 / 50 kg/m³

thickness: 2 / 3 / 5 / 10 / 15 mm

adhesive type: permanent / re-usable.

13.4.2 Installation

installation in general

☐ installation method: nail down / glue down / floating / stick down on elastic-adhesive underlay / sprung / as recommended by manufacturer

Underfloor heating has important repercussions for wood and laminate flooring. Check with supplier, SAWLFA.

☐ pattern: see drawings

nail down

Nail down is *suitable* for solid and engineered wood strip on new concrete floors or stairs, on existing rigid floors that are reasonably level, where a dpm is required, and where the total floor covering thickness of about 40 mm can be accommodated. Not to be installed over underfloor heating unless space between battens is filled with a cement:sand mix. Can be installed on walls as panelling.

Nail down floors can reduce impact noise transmission.

13.5 Textile flooring

To be published: SANS 2001- EF2 Textile flooring.

13.5.1 Materials

textile flooring

☐ type: pile construction / needle punched construction

☐ colour and design: ...

☐ fire index class: 1 / 2 / 3 / 4 / 5

Fire index: material to be used for floor covering (including underlays) or wall finish is tested in a standard manner and is classified on a scale of 1 to 5. These classifications are based on a "fire index" which in turn represents the effect of rate of burning and the amount of heat and smoke generated. Most good quality floor coverings have a fire index of 1 or 2. See SANS 10400-T table 9 and 10 for required classes for different occupancies.

☐ location grade: U1 / U2 / U3 / U4 / U5

Location grade: U1 (light domestic); U2 (medium domestic); U3 (heavy domestic, light commercial); U4 (medium commercial); U5 (heavy commercial).

carpet underlays

☐ type: fibrous / foam / contractor's choice

Underlays: needled fibre, foam rubber, latex bonded fibre or composites. A carpet should be fire tested with its underfelt, since no fire classification for underfelt is currently available. Underfelt makes an important contribution to impact sound insulation, and to airborne sound absorption provided the carpet has a porous backing.

13.5.2 Installation

Seams should run parallel to length of area (so that traffic moves along rather than across the seam) and so that light from windows does not strike across the seam. Pile should face away from incident light and downwards on stairs.

13.6 Epoxy flooring

Epoxy floors are hard-wearing and have excellent resistance to chemicals, oils etc.

☐ aggregate colour, size: ...

application

☐ position of edge/dividing/feature strips: see drawings

☐ thickness: 1 – 6 mm

☐ finish: smooth / exposed aggregate finish.

Relevant standards:

SANS 10043 The installation of wood and laminate flooring

SANS 10070 The laying of thermoplastic and similar types of flooring.

SANS 10170 The cleaning and maintenance of floors.

SANS 10177 Fire testing of materials, components and elements used in buildings.

SANS 10186 The installation of textile floor coverings.

SANS 10245: The maintenance of textile floor coverings.

SANS 2424 Textile floor coverings – vocabulary.

SANS 10400-J Floors.

SANS 13746 Textile floor coverings – guidelines for installation and use on stairs.

EXTENDER

14 Painting, paperhanging

To be published: SANS 2001-EP Painting.

14.1 Materials primers

Standards for red lead or red lead/red oxide primers, zinc chromate primers, calcium plumbate primers, metallic lead primers have been withdrawn due to toxic lead content.

undercoats

Universal undercoats are *suitable* for interior and exterior use for subsequent application of solvent-borne finishes, especially gloss finishes.

- ☐ universal undercoat grade: 1 / 2 / as required

1 (high hiding), 2 (utility grade).

finishing paints alkyd

Alkyd paint, also known as enamel paint, is solvent-borne.

- ☐ alkyd high gloss finishing paint (SANS 630) grade: 1 / 2 / as required

1 (high hiding), 2 (regular hiding).

- ☐ decorative paint for interior use (SANS 515) type: semi-gloss / flat

emulsion

- ☐ emulsion paint (SANS 1586)

grade: 1 / 2 / 3 / 4

Grade: 1 (high hiding, scrub resistant), 2 (high hiding, washable), 3 (general purpose, washable), 4 (utility, interior only)

Emulsion paint is water-borne and suitable for application over plaster and masonry substrates. Grade 1, 2 and 3 is suitable for interior and exterior use, grade 4 for interior use only.

gloss designation: matt / semi-matt / semi-gloss

- ☐ textured emulsion wall coating (SANS 1227)

type: 1 / 2 / 3 / 4

1 (smooth aggregate-free), 2 (low-relief, sand-textured finish), 3 (high-relief, coarse-textured)

- ☐ fungus resistance: required / not required

Aluminium paint is typically an alkyd resin binder pigmented with flake aluminium.

Micaceous iron oxide paint is typically solvent-borne. Masonry paint may be solvent-borne or emulsion type.

varnishes, varnish stains, stains, sealers

Varnishes are transparent or semi-transparent.

Stains have no protective or preservative properties and are *suitable* for interior work only.

- ☐ varnish or varnish stains for interior use (SANS 887)

type: 1 / 2

1 (general purpose), type 2 (heat and chemical resistant)

gloss designation: glossy / eggshell

bituminous and tar-based coatings

Bitumen-based coatings for interior and exterior use on primed metal, masonry, fibre cement, wood, roofing felt, creosoted timber, hard bituminous surfaces.

specialized coatings

Epoxy and polyurethane coatings have superior resistance to abrasion and chemicals. One-pack materials usually do not have the same resistance as the two-pack types. They require a high standard of surface preparation.

14.2 Preparation of surfaces

- ☐ hardware etc.: remove, mark, store and refix / mask.

14.3 Colours

Specify colours on schedules. There is a marked difference in price for various colours, especially bright colours.

- ☐ identification colour marking (pipes etc.): required / not required.

14.8 Paint systems for on-site application

- ☐ paint system: see drawings

alkyd / emulsion / textured emulsion / masonry / cement / lime / varnish / aluminium / heat-resistant / sealer / intumescent

- ☐ colour: see drawings.

14.8.1 Cement-based surfaces, brick and stone alkyd paint

Alkyd-based coatings are sensitive to alkali. Alkali-resistant sealers are required on cement plaster and off-shutter concrete.

14.8.3 Wood transparent finish systems for wood (interior)

In transparent finishes the darker colours are more durable because they absorb ultraviolet light more effectively, but increase solar heat gain so that the moisture content of the wood decreases more rapidly.

Varnish is not recommended on exterior wood.

14.8.5 Plastics paint on unplasticized polyvinyl chloride (PVC-U)

A two-pack wash primer is no guarantee for proper adhesion of conventional paint systems

No general specification can be made with regard to the painting of plastic coatings. Seek expert advice.

14.8.6 Intumescent paint

- ☐ surfaces requiring intumescent paint: ...

Intumescent paint enhances fire resistance by limiting spread of flame. Check compliance with fire regulations.

14.9 Paperhanging

wallpaper

- ☐ type, pattern, colour: ...

Relevant standards:

SANS 10064: Preparation of steel surfaces for coating.

SANS 10305: Painting of buildings:

Part 1: Paint and paint selection.

Part 2: Paint application and defects.

Part 3: Paint types.

Part 4: Painting of walls, ceilings and cladding.

Part 5: Painting of roofs and steel structures.

Part 6: Painting of wood.

15 Furniture, equipment, stairs, architectural metalwork

15.1 Joinery

For wood doors and windows see Section 10.

15.1.1 Solid wood wood

☐ type: hardwood / softwood / laminated wood

hardwood

☐ species: ...

SANS 1099 includes requirements for preservative treatment. Annex C gives properties of 29 hardwood species, local or exotic.

softwood

☐ species: ...

laminated timber

☐ exposure class: 1 / 2 / 3 / 4

1 (exterior); 2 (semi-exterior); 3 (humid interior); 4 (dry interior).

☐ type of wood: hardwood / softwood

☐ species: ...

15.1.2 Wood board

☐ type: plywood / composite board / decorative melamine-faced boards (MFB) / fibreboard / particle board / oriented strand board (OSB)

plywood and composite board (SANS 929)

☐ exposure class: 1 / 2 / 3 / 4 / as required

1 (exterior); 2 (semi-exterior); 3 (humid interior); 4 (dry interior).

☐ type board: ply / composite

☐ type plywood: commercial / marine / structural

☐ type composite board: batten board / blockboard / laminated board / high-pressure decorative board / veneered particle board / veneered fibre board

☐ thickness plywood: 3 / 6 / 9 / 12 / 15 / 18 / 22 mm

☐ number of plies or laminae: 3 / 5 / 7

Number of plies are always odd.

☐ veneer: species..., rotary cut / sliced

☐ plywood grade: S / A / B

S (select, for decorative applications), A (furniture, for joinery where it may be reworked), B (standard, to be covered, coated or painted).

decorative melamine-faced boards (MFB) (SANS 1763)

MFB is low pressure melamine on particle board or MDF, suitable for medium duty vertical and light duty horizontal surfaces e.g. shelving – not for kitchen and office desktops.

☐ core: particle board / MDF

☐ thickness: 9 / 12 / 16 / 18 / 22 / 32 mm

Board size 3,6 x 1,8 m.

☐ shelving edge: sapele-print / melamine

☐ surface finish: smooth matt / textured / embossed wood grain

☐ moisture resistant board: required / not required

fibreboard (SANS 540)

☐ type: insulation board / medium density fibreboard (MDF) / tempered hardboard

MDF has a fine structure allowing for traditional wood-working techniques like moulding, embossing, routing and edge profiling.

☐ thickness of tempered hardboard: 3,2 / 4,8 / 6,4 mm / as required

Hardboard can be bent by cold-dry, cold-moist and hot-moist bending techniques. Consult manufacturer. For full range of thicknesses see SANS 540.

☐ moisture content range: ...

particle board (SANS 50312)

☐ type: P2 / P3 / P4 / P5 / P6 / P7 / as required

P2 (general purpose, dry conditions); P3 (interior fitments, dry conditions); P4 (load-bearing, dry conditions); P5 (load-bearing, humid conditions); P6 (heavy-duty, dry conditions); P7 (heavy-duty, humid conditions).

☐ thickness: 12 / 16 / 18 / 22 / 25 / 28 mm / as required

oriented strand board (OSB) (SANS 472)

☐ type: OSB/1 / OSB/2 / OSB/3 / OSB/4 / as required

OSB/1 general purpose dry interior; OSB/2 load-bearing dry conditions; OSB/3 load bearing humid conditions; OSB/4 heavy-duty load-bearing humid conditions, e.g. walls, floors, roofing, I-beams.

☐ thickness: 6 / 9 / 12 / 15 / 18 mm / as required

15.1.3 Polymer laminate and solid surfaces

high pressure decorative laminates (HPL) (SANS 4586)

HPLs consist of layers of phenol formaldehyde impregnated sheets of Kraft paper with melamine formaldehyde (MF) impregnated décor and overlay paper, pressed together. Normally glued to suitable board with a backer laminate for balance, but can be self-supportive (solid core).

☐ material type: S / F / P / as required

S (standard) / F (flame-retardant) / P (postformable).

☐ grade/duty class (wear, impact and scratch resistance) : 1 / 2 / 3 / 4 / / as required

1 (light duty, post-forming), 2 (vertical surface), 3 (general purpose), 4 (heavy duty)

General Purpose grade, thickness 1,2 / 1,5 / 2,0 / 2,5 / 3,0 / 3,5 / 4,5 mm: for work surfaces on counters, vanities, desks and tables, and for vertical surfaces like wall panels and front panels of work stations in hospitals, airports and restaurants.

Vertical Surface grade: for cabinet walls, door and drawer panels, desks, restaurant booths, architectural cladding.

Light duty/post forming grade, thickness 0,35 / 0,6 / 0,8 / 1,0 mm: for rounded edges.

Heavy duty, thickness 6,0 mm

☐ thickness: light duty and post forming: 0,35 / 0,6 / 0,8 / 1,0; general purpose: 1,2 / 1,5 / 2,0 / 2,5 / 3,0 / 3,5 / 4,5 mm; heavy duty: 6,0 / as required

Omit if default (1,2 mm for grade 3 (general purpose) and 1,0 mm for grade 1 and 2 (vertical surfaces and post forming) is acceptable.

☐ surface finish, colour, texture: smooth matt / textured / embossed wood grain / writing

☐ solid core grade: interior grade / exterior grade

☐ thickness interior grade: 3 / 6 / 8 / 10 / 20 mm

☐ thickness exterior grade: 20 mm

Solid core for horizontal and vertical work surfaces; exterior grade for vertical surfaces only, e.g. cladding, balustrading and signage.

Check thickness and usage with manufacturer.

continuous pressed laminates (CPL)

CPLs are supplied in 100 –150m rolls.

☐ grade/duty class, thickness: HGP / VGP / VLP / as required

HGP (horizontal, general purpose, postformable), thickness 0,6 mm, wear index number 3, impact index number 2, scratch index number 2; VGP (vertical, general purpose, postformable), 0,6 mm, 2, 2, 2; VLP (vertical, light duty, postformable), 0,35/0,5 mm, none, 2, 2.

☐ colour, pattern: ...

polymer solid surfacing material

☐ colour: ...

☐ inlays: ...

☐ form: ...

15.1.4 Stone surfaces

stone surfacing material

☐ type: ...

☐ thickness: ...

☐ edge: ...

☐ form: ...

15.1.5 Steel tubes for furniture

steel tubes for furniture SANS 657-4

☐ material and grade: mild steel 230 / 250 / stainless steel class A type 1 or 2, grade 304

☐ size, profile: see drawings

Size, profile: 16, 20, 25, 32, 38, 40, 50, 60, 70 mm $\varnothing$ (round steel); 16, 20, 25, 32, 50 mm (round stainless steel); 30 x 16 mm (oval steel); 20 x 20, 25 x 25, 32 x 32, 40 x 40, 50 x 50, 65 x 65 mm (square steel); 25 x 25, 32 x 32 mm (square stainless steel); 50 x 20, 50 x 25 mm (rectangular steel and stainless steel)

☐ wall thickness: see drawings

0,9 / 1,2 / 1,6 / 1,8 / 2,0 mm, depending on material.

☐ stainless steel finish: mill / matt / polished / mirror.

15.1.6 Joinery

general

Climate zones: inland / coastal. Inland zones represent over 90% of South Africa's climate, made up of an average 8% moisture content, including air-conditioned indoor areas.

☐ wood sizes: see drawings

Wood sizes: show finished sizes of timber members on drawings to avoid arguments about tolerance: 25 mm nominal size reduces to 22 mm after planing, 38 to 32, 50 to 44, 76 to 68, 114 to 105, 150 to 140, 228 to 118 mm.

Check available board sizes to ensure optimum yield and to avoid unnecessary waste.

Marine ply is a superior choice to moisture resistant particle board in wet areas.

☐ exposed edges of veneered composite board: solid wood edging to match veneer and to full thickness of board

grain, pattern

☐ direction of grain or pattern: see drawings

Omit if default (vertical on vertical surfaces, parallel to walls on horizontal surfaces) is acceptable.

backs

☐ backs to fittings: 4,8 mm hardboard / 16 mm ply/composite board / contractor's choice / not required

drawers

☐ drawer construction: see drawings

Omit if default construction is acceptable.

shop painting

☐ delivery of joinery on site: knot and prime / knot and prime hidden faces only / brush apply one coat clear finish as specified under Section 14 / reaction lacquer spray paint

Omit if fully painted (default) is acceptable.

15.1.7 Fixing

Consider tables, counters and shelves at a variety of heights to accommodate standing, sitting and a range of different tasks for disabled persons.

wood cornices, skirtings, quarter rounds, rails

☐ material: solid hardwood / medium density fibreboard / ...

☐ size and profile: see drawings.

15.2 Commercial kitchen cupboards (SANS 1385)

SANS 1385 covers 8 types of kitchen unit cupboards of steel sheet, composite wood board or solid timber. Kitchen Specialist Association (KSA) is the national trade association of kitchen fitting manufacturers. Consider specifying that the manufacturer/installer is a registered member.

☐ type of unit: see drawings

base / sink / was trough / wall / combination / corner / special / floor mounted tall cupboard

☐ colour: ...

☐ type of stainless steel for sinks, wash troughs, worktops: AISI-304 / AISI-430

☐ finish on mild steel fittings, handles, fasteners: electrodeposited nickel-chrome / zinc and cadmium

☐ type of wood: solid / laminated / hardboard / plywood / particle board / low pressure decorative board / laminated veneer board / as required

☐ material of work tops: composition board / stainless steel / ceramic / mosaic

☐ edging of worktops: hardwood / plastic moulding / extruded aluminium / self-edging (same material as top) / aminoplastic / high-pressure decorative laminate

☐ number and position of bowls: see drawings

☐ material of casings: sheet steel / solid timber / composite (particle board with laminates)

☐ material and construction of doors: steel butts / sliding / wood / composite board / glass panel

☐ locks: cylinder / lever

☐ region: inland / coastal region

☐ wood finish: raw linseed oil / lacquer varnish / bees wax and turpentine / epoxy resin

☐ dimensions: see drawings

Floor units: 300, 400, 450, 500, 600, 900, 1000, 1200, 1500, 1800, 2100 x 525, 600 x 900 mm; wall units: ditto length x 300 x 300, 600; tall units: 500, 900 x 525, 600; wash trough units: 450, 900, 1050, x 525, 600 x 900 mm / for non-modular dimensions, consult manufacturers.

☐ type door, arrangement of drawers, shelves: see drawings

Additional items

☐ plinths or any other part of wood cupboards in contact with the floor or wet areas, e.g. sinks, food preparation: solid hardwood / marine plywood / moisture resistant particle board / moisture resistant medium density fibreboard.

Composite wood and softwood swells or rots in contact with moisture from floor cleaning operations.

15.3 Commercial steel furniture (SANS 757)

☐ type of unit: see drawings

stationary cupboard / linen cupboard / pigeon-hole cupboard / locker / wardrobe / filing cabinet / card-index cabinet

☐ class, colour and texture of paint finishes: enamel or powder class 1 / 2

enamel or powder class 1 (minimum 0,06 mm thick) / 2 (minimum 0,03 mm thick)

☐ metal finishes: chromium / zinc / cadmium

☐ powder coated finishes SANS 1274: type 1 / 2 / high gloss / satin / matt

☐ number of drawers, adjustable shelves: ...

☐ type hinges: ...

☐ type of locking system: cylinder / latch rod / latch plate

☐ type of adjusting strip: ...

☐ mirrors in wardrobes: see drawings

☐ fire resistance rating of vertical plan filing cabinets: ...

15.4 Metal counters, balustrades, cladding, signs, street furniture

☐ material: see drawings

stainless steel / aluminium / prefinished metal

stainless steel

Stainless steel is low carbon steel containing >11% chromium (Cr), providing the steel with a corrosion resisting passive film.

Stainless steel classes are austenitic (300 series) and ferritic (400 series). Each class has several grades. Austenitic stainless steel grade 304 (European Norm 1.4301) is normally used for street furniture, shop fronts, doorways, counters, balustrades, cladding, signs, roofing and street furniture. Use grade 316 in corrosive regions. Ferritic stainless steel is used only in interior applications of a non-aggressive nature.

Locally produced stainless steel is available in flat products, forgings and castings. Hot-rolled flat sheet is 3 – 50 mm thick, cold-rolled 0,4 – 3 mm thick. Sections like angles, channels, welded pipe and tubes are cold-rolled from flat sheet. Other grades and products are imported.

Stainless steel mill finishes can be annealed, pickled or polished. Processed finishes are achieved by grinding, polishing or buffing. Stainless steel can be coloured, acid-etched, mirrored, electro-polished, perforated, expanded, meshed or screened.

Choose the correct grade with consideration of the building's location, prevailing environment and climate.

Design stainless steel elements to avoid receiving run-off water from other metals, or concentrated flows of rainwater over parts of the element. Designs must cater for the facilitation of regular cleaning.

Consult the Southern African Stainless Steel Association (SASSDA).

- ☐ austenitic stainless steel grade: 304 or 304L / grade 316 in the coastal region 3 – 4km from the coast
- ☐ finish: annealed and pickled mill finish / polished / coloured / etched / mirrored / electro-polished
- ☐ form: see drawings

sheet / section / perforated / expanded / meshed / screened

aluminium

- ☐ finish: mill / anodising / liquid organic coating / powder coating
- ☐ colour: ...
- ☐ finish: matt / satin / high gloss / hammertone / textured

prefinished sheet metal products

Organic film coating on steel, aluminium, stainless steel for interior and exterior use.

- ☐ type: 1 / 2a / 2b / 3 / 4 / 5a / 5b / 6a / 6b / as required

1 (interior, requiring further application after fabrication); 2a (dry areas); 2b (wet corrosive areas); 3 (mild to moderate rural, urban, tropical and industrial environments); 4 (marine and industrial); 5a (severe marine); 5b (heavy industrial and industrial marine); 6a (very severe marine); 6b (very severe industrial)

- ☐ colour: ...
- ☐ finish: flat / semi-gloss / gloss
- ☐ dry film thickness: ...
- ☐ type of substrate: hot dip galvanized steel / aluminium / stainless steel

15.5 Stairs and ramps

- ☐ type: see drawings

straight / spiral / dogleg / combination / helical / security/fire / enclosed

The rule in SANS 10400 – M of a minimum going of 250 mm and a maximum rise of 200 mm often leads to a disregard for another rule, i.e., “*any stairway ... shall have dimensions appropriate to its use*” (NBR part M Stairways). The full range of a more comfortable and safer proportion within the rule that “*the sum of the going and twice the riser is not less than 570 mm and not more than 650 mm*” would be: 180/280 mm; 170/280 – 310 mm; 150/280 – 350 mm and should be used in most public buildings.

Public ramps must have a safe gradient and frequent landings for disabled persons. Check with SANS 10400-S.

- ☐ structure: see drawings

painted mild steel / stainless steel / wood, species

- ☐ treads: see drawings

wood, species ... / stainless steel / steel / glass

- ☐ balustrade / handrail: see drawings

stainless steel / wood / glass / polymer concrete.

Relevant standards:

SANS 10400-M Stairways.

SANS 10400-S Facilities for Persons with disabilities.

SANS 10104 Handrailing and balustrading (safety aspects).

ETENDER

16 Hardware

Hardware information should appear on door, window or finishes schedules.

16.1 General

☐ type: see drawings

lock / latch / handle / plate / closer / hook and eye / bracket / hinge / bolt / door stop / door knob / door knocker / sanitary / furniture / curtain rail / edge or feature strip / sunken door mat / signage / drawer runner

☐ fire door hardware type: see drawings

escape hardware / panic bars / locksets with thumb turns / fire bolts

☐ material: see drawings

steel / stainless steel / aluminium / brass / nylon / ceramics / porcelain / wood

finish

For finishes on metal see SANS 1171 Annex C.

☐ finish: see drawings

natural / brass plated / copper plated / chrome plated / zinc plated / nickel plated / sherardised / cadmium plated / phosphated / passivated / antiqued / epoxy coated / powder coated / anodised

☐ sherardising coating thickness class: 15 / 30 / 45

15 µm normal indoor/outdoor / 30 µm severe outdoor / 45 µm highly severe outdoor/industrial/ marine.

☐ electroplating service condition: 1 / 2 / 3

1 (mild), 2 (moderate), 3 (severe)

Commercially plated fasteners are mostly sold with minimum corrosion protection, suitable only for dry interior conditions (corrosion resistance class C1). Thicker plating implies a special order (contact SAMFA – SA Metal Finishers Association – for details).

Rather specify solid brass, stainless steel or sherardized steel (30/45) for exterior or wet interior conditions, or ensure that plated products are protected by an appropriate paint system.

☐ appearance: bright / dull / satin.

16.2 Fasteners

☐ fastener type: bolt / screw / nut / washer / pin / rivet

☐ metal screws for wood, type: countersunk-head / round-head / raised countersunk-head / slotted or cross recess drive / hexagon-head / scant shank

☐ material and size: steel / brass / silicon-bronze / aluminium / stainless steel

☐ mild steel nails: type...; finish...

See SANS 1700 for full list of fastener types.

For roof/cladding fasteners see Section 7.

16.3 Locks, latches, catches, bolts

☐ type lock: see drawings

mortise / rim / cylinder / cupboard / drawer

☐ type handle: see drawings

lever / knob

☐ type latch: see drawings

mortise / cupboard / finger

☐ type catch: see drawings

magnetic / ball / roller

☐ type of bolt, size: see drawings

barrel / flush / tower / stable / extension / size

SANS 10400-S stipulates that door handles should be 450 mm away from any wall.

Consider handles, levers and controls that are easy to operate by disabled persons. SANS 10400-S: The manual operation of handles, taps, levers, switches, locks, control mechanisms and keys is in part affected by their design. The selection of controls requiring a 'twist-action' of the wrist and hand, and fine-finger movements should be avoided.

- ☐ hardware on fire doors: see drawings

padlocks

- ☐ type: see drawings

keyed / combination / masterkeyed

- ☐ duty: medium / heavy

- ☐ material: see drawings

brass / iron / chrome plated brass / aluminium / stainless steel

- ☐ size: see drawings

40 / 50 / ... mm

keys

- ☐ master and grand master keys: see drawings.

16.4 Hinges

hinges for lightweight doors

- ☐ type: see drawings

piano / pivot / flush / european (adjustable) / strap

hinges for medium to heavy doors

- ☐ material: see drawings

steel / stainless steel / brass / bronze

- ☐ number of hinges for fire doors: see drawings.

16.5 Door closers

- ☐ type: see drawings

surface-mounted / concealed in frame / concealed in floor / concealed in door / overhead / floor / manual / automatic

Consult AAAMSA Technical Publication: Hardware, Door Controls etc.

Ensure surface mounted overhead closers do not hit the wall when opening.

All fire doors are required to be fitted with closers (NBR), usually overhead. Do not fit a mechanical hold open arm to a fire door. Use concealed mechanisms in hygienic areas.

For concealed floor types, ensure floor spring box depth of up to 75 mm can be accommodated.

Specify a higher strength closer for exposed, windy or draughty conditions. Specify a lower strength for narrow doors.

Double doors with rebated meeting stiles must be fitted with a door selector to ensure the inactive leaf closes first.

- ☐ floor springs, consisting of a floor spring unit set into the floor, bottom and top door strap of size and finish: see drawings

Size depends on door size and weight – see manufacturer's literature.

16.6 Pelmets, curtain rails, rods, blinds

pelmets

- ☐ type, size and profile: see drawings / wood / metal / fabric

rails with rollers or glides

- ☐ track: single / double

- ☐ duty class: light / heavy

- ☐ finish: ...

- ☐ cord: with / without weighted cord pulleys

rods with rings

- ☐ rod, rings, end caps: wood / aluminium / steel

tie backs

- ☐ tie backs: ...

indoor venetian blinds

- ☐ slat width: 50 / 35 / 25 mm
- ☐ headbox: steel / aluminium
- ☐ type of ladder web: reinforced plastic / woven cotton / knitted cords

16.7 Edge, feature, dividing strips

- ☐ strip material: solid brass / aluminium / hot dip galvanized steel / PVC
- ☐ colour of plastic: ...

16.8 Sunken door matting

- ☐ material: natural coconut fibre with PVC backing / rubber / interlocking aluminium channels with plastic inserts / light or heavy-duty loop matting.

16.9 Number/name plates, safety signs

Type, letter size, position, message etc. should be given in schedule form.

Signs may be grouped: general information signs; hospital signs; safety signs; signs for disabled persons; statutory signs, e.g. fire safety.

- ☐ type: changeable plate system / variable room identification system / changeable letter system / illuminated signs / in-house signage / statutory signage

Changeable plate system: fixed plate holders to which may be attached or inserted removable interchangeable sign plates; variable room identification system: fixed room numbers and removable name strips; changeable letter system: holders into which can be inserted removable individual letters, numbers, etc.; illuminated signs: cabinet enclosing a light source illuminating a translucent face panel bearing the specified signage; in-house signage: project specific signs

- ☐ materials: aluminium / plastic / stainless steel
- ☐ colour: ...

symbolic safety signs

- ☐ type: PV / MV / WW / FB / GA

PV (prohibitory – circular, red), MV (mandatory – circular, blue), WW (warning – triangular, yellow), FB (informative, fire-fighting – square, red), GA (informative, general – square, green)

- ☐ reflectivity, luminosity: standard (non-reflective) / self-luminous (radio luminescent) / internally illuminated / retro-reflective or photo luminescent / decal / embossed
- ☐ size: 100 x 100 (WW7 only) / 150 x 150 / 190 x 190 / 290 x 290 / 440 x 440 / 880 x 880 mm)

See SANS 1186 Annex C for positioning, fixing, illumination and maintenance of signs.

16.10 Drawer runners/slides

- ☐ type commercial ball-bearing runner: normal / self-closing / soft-closing / push-locking
- ☐ load capacity: 30 kg static / 45/90 – 160 kg (heavy duty)
- ☐ extension: full / three-quarter.

Relevant standards:

SANS 10140 Identification colour marking.

17 Glazing

SAGGA – South African Glass and Glazing Association – is the trade association and AAAMSA member.

17.1 Materials glass

Clear and tinted float glass is made in South Africa by one manufacturer in Springs.

☐ type of glass: see drawings

float / safety / security / pattern / tinted / insulated / polymer

☐ float glass thickness: see drawings

Local float glass thickness: 3, 4, 5, 6 and 10 mm.

☐ laminated safety glass interlayer strength class: NS / HPR / HI

NS (normal strength), HPR (high penetration resistance), HI (high impact).

☐ bullet-resistant glass: class and level of attack: GA / GC / RA / RB / SB

Safety and security glass is made by several local manufacturers. Laminated safety glass is made with a poly-vinyl butyral interlayer (0,38 mm for Normal Strength (NS); 0,76 mm High Penetration Resistant (HPR); 1,14mm High Impact (HI)); or a cast in place polyester resin interlayer, available in one thickness only (0,5 mm Normal Strength). SANS 1263 provides for three applications, i.e. human contact, burglary and firearms. See SANS 1263 for bullet-resistant glass classes and level of attack.

☐ pattern glass thickness: 4 / 6 mm; colour: clear / amber / bronze; pattern: ...

All patterns cost the same.

☐ tinted glass: heat-absorbing / heat-reflecting / glare-reducing

☐ insulated glass units (SIGU's) : 6/12/6, low-e surface #2, dehydrated air filled gap / ...

6/12/6 denotes glass-space-glass. Common insulated glass thickness range (glass-space-glass) in South Africa is 20–28 mm. Life expectancy of double glazing in South Africa has not been recorded. Northern hemisphere experience indicates 7–12 years, 20 years being exceptional.

☐ coloured glass: ...

☐ work on glass: cutting / obscuring / acid embossing / silvering / gilding / staining or painting / bending

polymer glazing

☐ polymer glazing type: PC / PMMA / PVC clear / GRP / PS / PET / single wall / multi-wall

Available polymer glazing materials are polycarbonate (PC), polymethyl methacrylate (PMMA or 'acrylic'), polyvinyl chloride (PVC), glass-fibre reinforced polyester (GRP), polystyrene (PS), polyethylene terephthalate (PET). PC and PMMA is available in sheet sizes 1 250, 1 500 or 2 050 wide by up to 6 m long by 1,5 – 6 mm thick. They can be cold bent to minimum radii of 300 x thickness for acrylic, or 100 x thickness for polycarbonate.

Outstanding properties of polymer glazing are impact strength (polycarbonate 250x glass), light transmission, light weight, weather resistance, thermal insulation in multi-wall construction (40% better than glass). Typical applications: rooflights, industrial roofs, commercial greenhouses, shopping centres. Polycarbonate is self-extinguishing, acrylic burns like hardwood. No toxic fumes are claimed. Make generous allowance for thermal movement.

17.2 Glazing

17.2.2 Structural glazing

☐ design: by *competent person* (glazing) / submit proposals

Structural glazing depends on stringent quality tests and checks, for example the pretreatment of aluminium, surface finishing, sealants, and factory and site care. Check with AAAMSA.

A butt joint in structural glazing is assumed to have no structural strength.

Check underwater glazing, glazing for fire protection, for control of reflections in shop windows, for solar control, for one-way vision, unframed glazing, suspended glazing, glass floors, glazing with channel profiles, glazing with plastics and patent glazing, with manufacturers, specialists and SANS 10137.

17.2.3 Protection and cleaning

Anti-sun glass can be permanently damaged by mortar or plaster splashes. Specify precautions if risk is high.

17.3 Mirrors

☐ type: silvered clear glass / silvered coloured glass / stainless steel / privacy

silvered mirror backs are easily damaged. Silvered obscure glass also available. Stainless steel for vandal proof areas.

☐ size and position: see drawings

Consider full length mirrors in public places for children and disabled persons.

☐ coloured glass: pink / gold / bronze / black

Relevant standards:

SANS 10137 The installation of glazing materials in buildings.

SANS 1263 Safety and security glazing materials for buildings.

SANS 10400-N Glazing.

SANS 2001-CG1 Installation of glazing.

Relevant sources:

Selection Guide for architectural Aluminium Products. AAMSA.

Skylight Association of Southern Africa.

18 Drainage, sewerage, water and gas supply, fire equipment, sanitary plumbing

18.1 Roof eaves drainage

18.1.2 Gutters and downpipes

- ☐ gutter type: see drawings

eaves / valley / box / parapet/chimney

- ☐ material: Z275 / Z450 / Z600 / AZ150 / AZ200 hot dip galvanised steel sheet / uncoated steel painted on-site / aluminium / copper / U-PVC / fibre cement / prepainted

Galvanized sheet: Z275 or AZ150 for inland use; Z450/ Z600 or AZ200 for the *coastal region*, prepainted for corrosive industrial use. Commercial standard rainwater goods are made of 0,4- or 0,5-mm thick sheet.

- ☐ profile: see drawings

half round / square / rectangular

- ☐ size: see drawings

100 x 75 mm, or 100 / 125 / 150 mm half round (domestic); 125 x 100 (institutional); 150 x 100 / 200 x 150 / >225 x 225 (industrial). Sheet metal gutter standard lengths: 1,8; 3,0; 3,6; 4,8; 5,4; 6,0 m.

Gutter and downpipe sizes are determined by roof area and rainfall region in accordance with the requirements of SANS 10400-R: summer rainfall area: 140 mm²/m² roof area served; year-round rainfall area: 115 mm²; winter rainfall area: 80 mm². Downpipe internal size: 100 mm²/m² roof area served or 4400 mm² (75 mm diameter). For more information on gutter design, e.g. risk, rainfall intensity, hail and outlet protection, launders, drop boxes etc. see The Red Book – Southern African Steel Design Handbook, Section 11.

accessories

- ☐ outlet drop boxes: funnel shaped

Drop boxes for box gutter outlets improve flow and reduce stoppage by debris.

- ☐ overflow weirs in box gutters: required
- ☐ hail guards: see drawings

removable / pedestrian trafficable

Hail guards over gutters act as protection against hail, as maintenance walkways, as outlet protection and as protection against leaves and wind-blown debris. Trafficable hail guards should be made of suitable gauge expanded mesh – provide clear working *drawings*. Hail guards should be removable for maintenance.

- ☐ launders: see drawings

Launders are horizontal downpipes draining intermediate box gutter outlets to the exterior of large industrial buildings.

gutter brackets

- ☐ type: purlin / fascia / purpose-designed for industrial/box gutters / as supplied by gutter manufacturer

downpipes

- ☐ material: galvanised steel sheet / PVC

Do not use PVC downpipes if offsets are required.

- ☐ size: see drawings

75 / 100 / 120 / 150 mm square / diameter

Best solution for outlet protection is to use oversize downpipes ≥200 mm diameter.

- ☐ sheet metal downpipe bends: crimped / solder mitred / sealed and pop riveted

18.2 Flat concrete roof, balcony and floor drainage

18.2.1 Rainwater outlet

- ☐ type: see drawings

patent with grating / pipe without grating

- ☐ patent type: see drawings

vertical / 45° / 90° / two-way / car-park / pedestrian

- ☐ outlet size: see drawings

50 / 80 / 100 / 150 mm diameter

Outlets without gratings should be used for small roof areas in accessible position only, e.g. for balconies, and be not less than 75 mm in diameter due to the waterproof dressing restricting the pipe bore, unless pipe can be flanged.

18.2.2 Floor outlets

- ☐ material: ductile iron with baked epoxy coating / stainless steel

18.2.3 Outlet downpipes

- ☐ material: PVC / galvanized steel
- ☐ size: see drawings

75 / 110 / 160 mm (PVC); 80 / 100 / 125 / 150 mm (steel)

18.3 Stormwater drainage

18.3.1 Earthworks (SANS 2001-DP1)

SANS 2001-DP1 covers earthworks for trenches for all types and sizes of buried pipelines, ducts, cables and prefabricated culverts, including excavation, preparation of trench bottoms, bedding, backfilling and reinstatement of surfaces.

Specification data:

- ☐ pipes that are to be encased in concrete: see drawings

18.3.2 Storm water drainage (SANS 2001-DP5)

SANS 2001-DP5 covers the construction of stormwater drainage systems including pipelines, manholes, culverts, catchpits, inlet and outlet structures.

Specification data:

pipes

- ☐ material of pipe, associated fittings: see drawings

concrete / fibre cement / PVC-U / GRP / PP / PE

- ☐ diameter: see drawings

concrete pipes: 100, 150, 225, 300, 375, 450, 525, 600, 675, 750, 825, 900, 1050, 1200, 1350, 1500, 1800 mm. Check diameters of other material pipes.

culverts

- ☐ precast concrete culverts

class: 75S / 100S / 125S / 150S / 175S / 200S

dimensions (internal) : see drawings

span: 450, 600, 750, 900, 1200, 1500, 1800, 2400, 3000 mm

height: 300, 450, 600, 900, 1200, 1500, 1800, 2400, 3000 mm

tests

- ☐ tests: required / not required

18.3.3 In situ concrete stormwater channels

- ☐ overall width: see drawings

380 / 450 / ... mm

380 mm width: 230 mm x 75 mm deep channel; 450 mm width: 300 mm x 100 mm deep channel.

- ☐ fall: see drawings

1:250 min.

- ☐ spill basin shape, size and finish: see drawings.

18.4 Sewerage

18.4.1 Earthworks (SANS 2001-DP1)

Specification data:

- ☐ pipes that are to be encased in concrete: see drawings

18.4.2 Sewers (>160 mm) (SANS 2001-DP4)

SANS 2001-DP4, *Sewers*, covers the construction of sewer systems within servitudes, road reserves and interconnected complexes and is suitable for the construction of below ground sewers having a diameter greater than 160mm. Excludes sewer rising mains, pump stations, treatment works, and ancillary works.

Specification data:

- ☐ type of pipe, associated fittings: ductile iron / fibre cement / PVC-U / structured wall PVC-U / PP / GRP / pitch impregnated fibre / vitrified clay / reinforced concrete

Unplasticised polyvinyl chloride (PVC-U); polypropylene (PP); glass-reinforced plastics (GRP)

- ☐ diameter: see drawings

200 / 250 / 315 / 355 / 400 / 450 / 500 / 560 / 630 / 750 / 800 / 900 / 1 000 mm diameter (PVC-U). Check diameters of other material pipes.

- ☐ gradient: see drawings
- ☐ step irons in manholes: required / not required
- ☐ masonry manholes: plastered internally / plastered internally and externally to prevent infiltration
- ☐ tests on completed pipelines: required / not required.

18.4.3 Sewers for buildings (SANS 2001-DP7)

SANS 2001-DP7 covers surface mounted sewers having a nominal diameter of 200 mm or less; and below ground sewers having a nominal diameter of 160 mm or less including manholes and the like which discharge into a connecting sewer, conservancy tank, French drain or septic tank. This standard is *suitable* for constructing sewers designed in accordance with the design rules provided in SANS 10400-P, Drainage. Construction of manholes is referred to SANS 2001-DP4.

Specification data:

- ☐ type of pipe, associated fittings: cast iron / ductile iron / fibre cement / PVC-U / structured wall PVC-U / PP / GRP / pitch impregnated fibre / vitrified clay / reinforced concrete
- ☐ nominal diameter: see drawings

40 / 50 / 75 / 110 / 160 mm

- ☐ gradient: see drawings

SANS 10400-P requires that sewer gradient be not flatter than 1:120 for 100 mm diameter pipes and 1:200 for 150 mm pipes. The hydraulic load determines the minimum grade of the pipe.

18.4.4 Surface boxes, manhole covers, gully gratings, frames

For vehicular and pedestrian areas only (does not apply to gullies and manholes in buildings).

- ☐ type: see drawings

surface box / valve chamber / manhole/inspection cover / gully grating

- ☐ material: polymer concrete / cast iron or steel

polymer concrete

- ☐ polymer concrete covers

size: see drawings

duty class: see drawings

heavy (trucks) / medium (domestic vehicles) / light (no wheeled vehicles)

cast iron/steel and concrete

- ☐ cast iron, cast steel, rolled steel combined with concrete covers

size: see drawings

duty class: see drawings

A15 / B125 / C250 / D400 / E600 / F900

Class A15 pedestrian and pedal cyclists; B125 car parks; C250 road kerbside channels; D400 roads, hard shoulders, parking for all types of road vehicles; E600 docks, aircraft pavements; F900 particularly high wheel loads.

- ☐ gully gratings: laid loose / bedded in bitumen.

18.4.5 Grease interceptors

- ☐ material: stainless steel / reinforced fibreglass

- ☐ type, capacity and size: see drawings / to approval of the local authority

Several models are available on the market.

18.4.6 Pit latrines

- ☐ type: see drawings

VIP / masonry / patent / to approval of local authority

- ☐ construction: masonry / patent precast concrete / patent polymer
- ☐ pit size: see drawings

Pit size depends on capacity/ number of persons using. Omit if default (750 x 1 500 x 2 000 mm minimum deep) is acceptable. Maximum pit size: 1 000 x 2 500 x 2000 mm.

18.4.7 Conservancy tanks, septic tanks and french drains

- ☐ type: see drawings

conservancy tank / septic tank / french drain

- ☐ construction: masonry / patent precast concrete / patent polymer
- ☐ tank capacity: see drawings / as prescribed by local authority

Conservancy tank capacity is typically 6 000 L. See SANS 10400-P for sizing of septic tank. Patent septic tank capacity 1 250 litres (2-4 persons); 1 500 (2-6); 1 750 (4-6); 2 000 (4-7); 2 500 (4-9). Consult SANS 10252 for design guidelines.

- ☐ french drain length: see drawings

See SANS 10400-P for length formula, positioning, soil type, etc.

18.5 Water supply

18.5.1 Earthworks (SANS 2001-DP1)

SANS 2001-DP1 covers earthworks for trenches for all types and sizes of buried pipelines, ducts, cables and prefabricated culverts, including excavation, preparation of trench bottoms, bedding, backfilling and reinstatement of surfaces.

Specification data:

- ☐ pipes that are to be encased in concrete: see drawings.

18.5.2 Below ground medium pressure pipelines (SANS 2001-DP2)

SANS 2001-DP2 covers the supply and installation of pipelines of diameter greater than 160 mm and up to 1 000 mm, complete with ancillary works (valves, strainers, hydrants, manholes, surface boxes, chambers) for transporting water and sewage under working pressures up to 2,5 MPa.

Erf or connections to buildings from mains are covered in SANS 2001-DP6.

Specification data:

- ☐ type of pipe: steel / ductile iron / concrete / fibre-cement / GRP / PE / PP / contractor's choice)

glass-reinforced plastics (GRP); polyethylene (PE); polypropylene (PP)

- ☐ nominal pipe sizes: see drawings.

225 / 300 / 375 / 450 / 525, 600 / 675 / 750 / 825 / 900 mm

18.5.3 Below ground water installation for buildings (SANS 2001-DP6)

SANS 2001-DP6 covers the construction of water pipelines having a nominal diameter of up to 160 mm from a water reticulation main to the boundaries of individual erven or other specified points on erven. It covers the installation of pipework and associated specials which provide water, meters and fire hydrants

SANS 2001-DP6 is suitable for construction of fire installations designed in accordance with the design rules provided in SANS 10400 W, Fire installations.

Specification data:

- ☐ type of pipe and associated fittings: galvanised mild steel / fibre cement / GRP / PE / PP / PVC / PVC-U / PVC-M / PVC-O / copper / contractor's choice

Glass-fibre reinforced plastics (GRP) / polyethylene (PE) / polypropylene (PP) / polyvinyl chloride (PVC) / unplasticised polyvinyl chloride (PVC-U) / modified polyvinyl chloride (PVC-M) / oriented polyvinyl chloride (PVC-O).

☐ nominal pipe size: see drawings

40 / 50 / 75 / 110 / 160 mm

☐ meter type and size: ...

18.5.4 Above ground water installation

☐ pipe material: galvanised mild steel / PP / copper / contractor's choice

☐ nominal pipe size: see drawings

8 / 10 / 12 / 15 / 18 / 22 / 28 / 35 / 42 / 54 / 67 / 76 / 108 mm (copper, check other pipe types)

☐ fixing of pipes <20 mm: chased / surface fixed

Surface mounting may be a requirement from a maintenance point of view.

Chasing is prohibited in wall faces that are to receive roof flashing. Roof flashing is inserted in grooves sawn by a separate trade with disc cutters after pipes are installed, leading to unnecessary and costly pipe repair work when pipes are damaged.

18.5.5 Water storage tanks

☐ tank material: tumbled polymer / pressed steel sections bolted and sealed together / corrugated steel

☐ capacity or size: see drawings / ...L

☐ stand for external tanks: ...

18.6 Electric geysers and solar water heaters

18.6.1 Electric geysers

☐ geyser type: open outlet / cistern type / closed (unvented) / floor or wall mounting / horizontal or vertical

geysers should be placed near kitchen sinks that are regularly used throughout the day. Show geyser positions in drawings.

☐ nominal capacity: see drawings

open outlet and cistern type ≤15 / 25 / 50 / 75 / 100 / 125 / 150 / 175 / 200 / 250 L; closed type 15 / 25 / 50 / 75 / 100 / 125 / 150 / 175 / 200 / 250 / 300 / 400 / 600 L

☐ design: standard / solar / dual purpose.

18.6.2 Solar water heaters

☐ type: domestic / commercial / industrial

☐ capacity in litres (integral units only): ...

☐ collector/storage combination: integral / close-coupled / split

☐ heat transfer method: direct / indirect

☐ circulation method: thermo-siphon / pumped

☐ cover: with cover / without cover

☐ supplementary energy source required: mains electricity / gas / ...

☐ working pressure: 0 / 100 / 200 / 300 / 400 kPa

☐ freezing, hail resistance: required / not required.

18.8 Fire equipment

fire hose reels

☐ height from floor to spindle if not 2 100 mm: ...

☐ enclose reel in security box with clear acrylic cover and suitable closer: required / not required

portable fire extinguishers

☐ portable non-refillable general purpose extinguishers (SANS 1322):

Suitable for all classes of fire other than class D

class: I / II

class I (temp <110°C); II (temp <65°C)

capacity: 1,5 / 2,5 kg

extinguishing medium: lp gas / dry powder

☐ water, foam or dry powder rechargeable extinguishers (SANS 1910):

type: water / foam / dry powder

class of fire: A / B / C

A (ordinary combustibles); B (flammable liquids); C (live electric power), or combinations, e.g. ABC

☐ CO₂ type extinguisher (SANS 1567):

capacity: <9kg

class of fire: A / B / C

☐ BCF type extinguisher (SANS 1151) capacity: 1 – 12 kg

Suitable for class of fire AC / BC / ABC

☐ enclose extinguisher in security box with clear acrylic cover and suitable closer: required / not required.

18.9 Sanitary plumbing

18.9.1 Sanitary appliances appliances

☐ appliance type: see drawings

wash-hand basin / bath / water closet / urinal / bidet / sink / flushing cistern

☐ material: see drawings

glazed ceramic / stainless steel / plastic / stone / concrete

☐ stainless steel grade: 430 / 304 / 316; finish: satin / bright

Omit if default (430) is acceptable. Stainless steel grades are listed by the American Iron and Steel Institute (AISI). Grade 430 is *suitable* for domestic purposes, kitchen sinks, wash troughs and hand wash basins. Grade 304 is *suitable* where mild corrosive conditions exist, e.g. in *coastal areas*. Grade 316 is *suitable* for laboratories, photographic workrooms and seagoing vessels where corrosive conditions are severe.

☐ anti-theft waste plug: required / not required

☐ flow restrictors: required / not required

baths

☐ type, shape: see drawings

built-in / freestanding / spa / rectangular / oval / corner

☐ handles: required / not required

basins

☐ type, shape: see drawings

counter-top / wall hung / drop-in / pedestal / round / oval / corner

wash troughs

☐ type: see drawings

single trough / double trough / with drainboard

water closets

☐ type: see drawings

wall-hung / floor mounted / close-couple / squat

flushing cisterns

☐ type: see drawings

high level / low level / near level / close coupled / wall-hung / concealed

☐ flush capacity: low-flush (4½ or 6 L) / regular flush (6 or 9 L)

☐ flush valve flushing operation: single flush / dual flush / interruptible flush

urinals

- ☐ urinal type: see drawings

bowl / trough / stall

bidets

- ☐ bidet type: see drawings

wall-hung / floor mounted

sinks

- ☐ sink type: see drawings

domestic / laboratory / scullery / scrub sink / cleaner's / drop-in / wall-hung / pot / freestanding / with drainboard / with backsplash and tiling key / single, double or triple compartment

- ☐ bowl position: see drawings

left / right / centre

shower enclosures

SASEMA (South African Shower Enclosure Manufacturer's Association). SANS 549 "domestic" includes use in hotels, student accommodation, hospitals.

- ☐ shower enclosure type: purpose made / prefabricated / domestic to SANS 549 / medical / industrial / cabinet / curtain / roofed (steam shower)

- ☐ drained floor type: tiled / tray / bath

- ☐ glazed wall/door/roof construction: framed / frameless

Frameless construction requires toughened safety glass. Holes for hinges etc. must be prepared before toughening.

- ☐ safety glass: toughened safety glass / laminated safety glass / plastic

- ☐ door type: pivoting / folding- sliding

- ☐ metal finish: anodising, grade ... / powder coating, type 4

Metal coating grade/thickness will depend on location: anodising grade AG15 or AG20 will suffice for mild atmospheric conditions, while grade AG25 will be required for coastal applications. For powder coating, type 4 or 5 should suffice. Check with manufacturer.

18.9.2 Taps, valves, showerheads

- ☐ tap, valve type: see drawings

bath / basin / shower / sink / garden / bib / pillar / mixer / divert mixer / swivel / stop / flush / gate / hose / washing machine / draincock / float

- ☐ showerhead type: see drawings

fixed rose, diameter ... / adjustable rose / swivel / rail / vandalproof / handshower and holder

- ☐ material: chromium plated brass / stainless steel / plastic

- ☐ flush valve type: WCHP / WCLP / urinal

WCHP (Water closet high pressure; WCLP (water closet low pressure).

18.9.3 Traps

- ☐ type: see drawings

bottle trap / P-trap / P-trap resealing / pop-up

- ☐ material: plastic / rubber / chromium plated brass

- ☐ depth of seal: 40 / 75 mm.

18.9.4 Miscellaneous

holders

- ☐ holder type: see drawings

paper / soap / tumbler / tooth brush / toilet brush / towel rail/ring/hook

- ☐ material: chromium plated brass / glazed ceramic / aluminium / wood

shelves

- ☐ material: safety glass with polished edges on nickel-chromed / wood / metal / plastic brackets

cabinets

- ☐ type: wall / vanity / with mirror
- ☐ material: wood / plastic / metal.

Relevant standards:

SANS 10105 The classification, use and maintenance of portable fire extinguishers.

SANS 10112 The installation of polyethylene and PVC-U pipes.

SANS 10102 Selection of pipes for buried pipelines.

SANS 10252-1 part 1: Water supply and drainage for buildings; part 2: Drainage installation for buildings.

SANS 10254: The installation of fixed electric storage water heating systems.

SANS 10400-P Drainage.

SANS 10400-Q Non-water-borne means of sanitary disposal.

SANS 10400-R Stormwater disposal.

Relevant sources:

Concrete Pipe Handbook published by the Concrete Society of Southern Africa.

19 Electrical works

19.1 Earthworks (SANS 2001-DP1)

SANS 2001-DP1 covers earthworks for trenches for all types and sizes of buried pipelines, ducts, cables and prefabricated culverts, including excavation, preparation of trench bottoms, bedding, backfilling and reinstatement of surfaces.

Specification data:

- ☐ areas where pipes are to be encased in concrete: see drawings

19.2 Cable ducts (underground) (SANS 2001-DP3)

SANS 2001-DP3 covers the supply, and the laying and bedding in trenches, of pipes of diameter not exceeding 160 mm as ducts for the protection of telephone and electric power cables.

Specification data:

- ☐ type of pipe, associated fittings: pitch impregnated fibre / PVC-U / fibre cement / vitrified clay

Unplasticised polyvinyl chloride (PVC-U).

- ☐ draw pits: see drawings.

19.3 Materials and installation

19.3.1 Wiring

conduits

Chasing is prohibited in wall faces that are to receive roof flashing. Roof flashing is inserted in grooves sawn with disc cutters after conduits are installed, leading to unnecessary and costly repair work.

conductors

See SANS 10198 The selection, handling, and installation of electric power cables of rating not exceeding 33 kV.

distribution board, meter cabinets

- ☐ position of DB's and meter cabinets: see drawings.

19.3.2 Fittings

luminaires

- ☐ type: see drawings

surface mount / recessed / accent / downlighter / step / theatre / outdoor (pole, step, bollard)

stove, hob, oven, cooker hood

- ☐ stoves, hobs, ovens, cooker hoods model, type: ... / see drawings.

Relevant standards:

SANS 10114 Interior lighting.

SANS 10389 Exterior lighting.

SANS 10142 The wiring of premises.

SANS 10222 Electrical security installations.

SANS 10313: The protection of structures against lightning.

SANS 61024 Lightning protection of structures.

20 Mechanical works

20.1 Installation

- ☐ routing and/or concealment of cables, ducts, trays, pipes etc. : see drawings.

20.3 Location and access

- ☐ catwalks, cat ladders, access panels: see drawings.

Catwalks and cat ladders should be detailed and coordinated with other services in order to keep to a minimum.

ENDER

21 External works

21.1 Paving

21.1.1 Materials units

- ☐ paving unit type: see drawings

precast concrete blocks / burnt clay pavers / in-situ concrete / precast concrete slabs

precast concrete segmental paving blocks

- ☐ type: S-A (interlock) / S-B (semi-interlock) / S-C (rectangular)
- ☐ class: 25 / 35

Class 25 (MPa) concrete blocks should be specified for most uses.

- ☐ nominal thickness: 50 / 60 / 80 / 100 / 120 mm

Thickness of blocks depends on site conditions, design requirements and cost.

- ☐ top edges: chamfered / not chamfered
- ☐ colour: ...

burnt clay paving units

- ☐ class: PB / PA

PB (uniform), PA (highly uniform in shape and size).

- ☐ colour and work size: ...

precast concrete paving slabs

- ☐ size: 295 / 445 / 595 x 295 / 445/295 / 595/455 x 50/65 mm

sand for bedding and jointing of flexible paving

The use of mine sand for jointing is generally accepted.

21.1.2 Preparation

subgrade

- ☐ subgrade levels and falls: see drawings

Check soil and traffic conditions with a Competent Person. The sub-base thickness is a function of both the type and amount of traffic to be carried and the strength of the subgrade. See also SANS 1200 ME, MF, ML.

concrete sub-base for rigid paving

- ☐ thickness, reinforcement: see Section 2

weed killer

- ☐ treat area to be paved with *suitable* weed killer: required / not required

levels, falls, pattern

- ☐ levels and falls: see drawings

A fall of 1:60 is regarded as an optimum fall. Gradients of 1:100 are less forgiving (workmanship, settlement).

- ☐ pattern: see drawings / herringbone / basket weave / stretcher / waving

Edge restraints along the perimeter of the paving is necessary to prevent lateral spread of the units and to retain the bedding course sand. See concrete culverts, kerbs etc. below.

21.2.1 Laying

See SANS 784 for guidance on tactile indicators for access and mobility.

- ☐ type of paving: see drawings / flexible block/brick / flexible slab / rigid block/brick / in situ concrete

flexible block/brick paving

Flexible paving is paving laid on sand, with joints filled with sand. The surfaces of flexible paving usually bed down ± 5 mm after trafficking.

Consider mixing filling sand with 10 – 15% cement depending on traffic, type of paver, and control of weed growth. Spray paving thus filled with a fine spray of water immediately after filling to clean off all cement.

- ☐ concrete anchor beams across road on grades exceeding 8%: ...

Horizontal forces of motor traffic increase considerably on grades exceeding 8%, causing creep. This is avoided by casting concrete anchor beams across the road. On steeper grades the paving should preferably be rigid. See CMA technical note 6.2 1994.

flexible slab

- ☐ joints: filled with mortar / to be left open

rigid block/brick paving

Rigid paving is paving units bedded in mortar on a concrete base. External paving is exposed to wide temperature and moisture fluctuation which can only be provided for by movement joints.

accuracy

Accuracy depends on experience of contractor and/or labourers, and importance of the contract.

21.2 Concrete culverts, kerbs, channels

- ☐ type: see drawings

culvert / kerb / channel

21.2.1 Materials

- ☐ precast concrete culvert class: 75S / 100S / 125S / 150S / 175S / 200S

Class depends on foundation conditions and fill.

dimensions (internal) : see drawings

span: 450 / 600 / 750, 90 / 120 / 150 / 180 / 240 / 3 000 mm; height: 300 / 450 / 600 / 900 / 1 200 / 1 500 / 1 800 / 2 400 / 3 000 mm

- ☐ kerb type: see drawings

rectangular / half-battered / battered / mountable

- ☐ edging type: see drawings

rectangular / half-round

- ☐ channel type: see drawings

rectangular / tapered.

21.2.2 Laying

- ☐ movement joints: leave open / fill with polysulphide.

21.3 Concrete retaining blocks

Concrete retaining blocks are an economical, versatile and environmentally compatible method of retaining earth and be used for planting, steps, seats, pavilions, and for erosion and scour control.

blocks

- ☐ shape, size and colour: ...

preparation

- ☐ depth, level and type of foundation: see drawings

Foundations: also on sloping or gravel foundation. *Drawings* should show this. Compacted earth foundation is usually sufficient for structures not higher than 1,2m. Higher walls should be thicker, inclined towards the retained earth, anchored with a geogrid mesh, or by modifying the properties of the backfill. Consult the supplier of the blocks and/or Competent Person. Ensure building regulations are complied with.

- ☐ width of foundation: see drawings

Show width of foundation if of concrete.

- ☐ drain pipes, aggregate drain, geofabric drain behind retaining wall: required / not required

placing

- ☐ stacking pattern: see drawings

- ☐ geofabric reinforcement: required / not required.

SANS 207 gives recommendations for the application of reinforcement techniques to soils and other fills.

21.4 Gabions

materials

- ☐ cage dimension: 4 x 1 x 1 / 6 x 2 x 0,5 m

- ☐ mesh wire to be PVC-coated: required / not required.

21.5 Fencing

- ☐ type: see drawings

line wire on steel posts, stays, droppers and standards / wire chain-link mesh on strain wire on steel posts, stays, droppers and standards / welded mesh / barbed tape / palisade / electric / private swimming pool

21.5.1 Line wire and chain-link mesh fencing

- ☐ type wire: ...

line / barbed

- ☐ type chain link wire: 1 / 2

1 (zinc coated) / 2 (zinc coated and PVC coated).

- ☐ colour of PVC coating when relevant: dark green / white

- ☐ nominal size mesh of chain-link wire: 40 / 50 / 60 / 75 / 100 mm

posts, stays, standards, droppers

- ☐ type: steel / concrete / wood

erection

- ☐ fence height: see drawings

900 / 1 200 / 1 800 / 2 000 / 2 400 / 3 000 / 3 600 mm

fencing gates

- ☐ size, shape: see drawings.

21.5.2 Weld mesh fencing

- ☐ material: mild steel / high tensile steel / very high tensile steel

High tensile steel (>950 MPa); very high tensile steel (>1 250 MPa).

- ☐ mesh size: 25 x 25 / 50 x 25 / 50 x 50 / 100 x 50 / 100 x 100 mm

- ☐ finish: hot dip galvanized / black / hot dip galvanized and powder-coated

- ☐ fence height: see drawings

1 200 / 1 800 / 2 400 mm

21.5.3 Barbed tape fencing

- ☐ type: A (concertina) / B (flatwrap) / C (barbed tape unclipped) / D barbed razor tape

- ☐ material: zinc-coated steel strip / stainless steel

- ☐ zinc coating grade: light / medium / heavy

21.5.4 Palisade fencing

- ☐ type: steel / concrete

- ☐ finish on steel: paint / hot dip galvanized

steel

- ☐ type: security purpose / general purpose

- ☐ steel fence height: see drawings

1 800 / 2 400 / 3 000 / 3 600 mm

- ☐ concrete fence height: see drawings

1 800 / 2 400 mm.

21.5.5 Electric fencing

- ☐ type: wall top / from ground up / electrified palisade / freestanding

- ☐ number of lines for wall-top type: 6 / ...

- ☐ powered by: mains / battery / solar.

21.5.6 Gate automation

- ☐ theft-resistant cages with padlock: required / not required.

21.5.7 Private swimming pool fencing

- ☐ fence height: see drawings

1,6 m* / 1,2 m

☐ type of protective wire coating: powder / zinc / paint / dual (paint over zinc).

• **21.6 Precast concrete plank walling**

☐ type panel: plain / decorative

☐ colour: natural / ...

☐ height of wall: see drawings

900 / 1 200 / 1 500 / 1 800 / 2 200 mm

☐ width of panel: 300 / 600 mm.

21.7 Swimming pools

☐ swimming pool size, shape and finish: see drawings

21.8 Timber decking

SANS 10043 covers general principles on the installation of timber decking.

21.8.1 Materials

poles

☐ wood: softwood / hardwood

Softwood: Pinus; hardwood: Eucalyptus.

☐ top diameter (thin end): see drawings

50-79 (red) / 80-99 (yellow) / 100-119 (blue) / 120-139 (white) / 140-159 (orange) / 160-179 (green) / 180-199 (black) mm; ditto posts: 145-174 / 175-199 / 200-230 mm.

structural laminated timber

☐ wood: softwood / hardwood

Softwood: Pinus; hardwood: Eucalyptus.

☐ appearance and finish: P

Rough-sawn (R), fine-sawn (F), planed (P), sanded (S), smoothed (G), coated (C), special (X).

Preservative treatment: The Forestry Act 1968 (Act 72 of 1968) provides for the legal requirement of pressure treatment of structural softwood timber to combat any fungus or bacterial disease, insects or parasites affecting the timber. The present legislation applies to the so-called *the coastal region* only.

☐ fire retardant treatment: required / not required

☐ size: ...

deck boarding

☐ wood: softwood (Pinus) / hardwood

☐ softwood:

grade: clear / semi-clear

dimensions: 22 / 33 mm x >50 mm wide

☐ hardwood:

specie: ...

grade: clear / figured

dimensions: 20 mm x 35 – 90 mm wide

fixings

☐ screws: solid brass / silicon bronze / aluminium / stainless steel

balustrades

☐ material: wood / metal / glass / ...

☐ construction: ...

Balustrades to conform to SANS 10400-M.

21.8.2 Installation

☐ pole to ground contact: see drawings / planted in concrete / on metal brackets on concrete footings

☐ plug screw holes with matching wood: required / not required

☐ protect end grain with metal caps: required / not required / see drawings.

21.9 Landscaping

21.9.9 Garden furniture

☐ garden furniture type: see drawings

table / bench / seat / canopy / litter bin / playground equipment

☐ material: see drawings

precast concrete / wood / metal

☐ finish: ...

21.9.10 River pebbles

☐ size, colour, mix: ...

Relevant standards:

SANS 1200 MJ Segmental paving.

Precast concrete paving blocks – laying manual. The Concrete Masonry Association.

Technical guide: Clay Pavers & Paving – selection and construction guidelines. Corobrik.

SANS 10244 Zinc and zinc-alloy coatings on steel wire.

SANS 10104 Handrailing and balustrading (safety aspects).

SANS 14001 Environmental management systems.

PART C3.3.1

Particular Project Specifications

In the event of any discrepancy between the Project Specifications and a part or parts of the COLTO Standardized Specifications, SANS 1200 Standardized Specifications, the Schedule of Quantities or the Drawings, the Project Specifications shall take precedence. Where discrepancies arise with regard to the units of the payment items only, the units stated in the Schedule of Quantities shall prevail.

PS 1	CONSTRUCTION PROGRAMME
PS 2	SITE FACILITIES AVAILABLE
PS 3	SITE FACILITIES REQUIRED
PS 4	FEATURES REQUIRING SPECIAL ATTENTION
PS 5	INFORMATION SUPPLIED BY EMPLOYER
PS 6	EXTENSION OF TIME ARISING FROM ABNORMAL RAINFALL
PS 7	CERTIFICATES OF PAYMENT
PS 8	CONSTRUCTION IN LIMITED AREAS
PS 9	NON-WORKING DAYS
PS 10	SPOIL MATERIAL
PS 11	DRAWINGS
PS 12	LENGTH OF TRENCHES
PS 13	SAMPLES
PS 14	MANUFACTURER'S INSTRUCTIONS
PS 15	MATERIALS AND PLANT
PS 16	NOTICES, SIGNS, BARRICADES AND ADVERTISEMENTS
PS 17	SETTING OUT OF WORK
PS 18	WORKMANSHIP AND QUALITY CONTROL
PS 19	TRANSPORT OF MATERIAL
PS 20	LIAISON WITH LOCAL AUTHORITIES
PS 21	LOCAL LABOUR AND LOCAL SUBCONTRACTORS
PS 22	TRAINING SCHEMES
PS 23	PRESCRIPTIONS IN RESPECT OF EXISTING SERVICES

PS 1: CONSTRUCTION PROGRAMME

It is a prerequisite of this contract that minimal disruption of the public is ensured during construction. Construction methods must be of such a nature that no property or life is endangered. The Municipality accepts no responsibility for any work done outside the site boundaries without the Engineer's approval. The Contractor himself is responsible for liaison and arrangements with the Engineer in connection with the finalization and approval of the construction programme.

The Contractor is responsible for liaison with residents and house owners via the Project Steering Committee in respect of the programming of construction through private erven and the crossing of driveways to erven. No additional payment will be made in this regard and it shall be deemed to be covered by the relevant items.

Sufficient digital photographs of all existing structures and obstructions in the pipe line routes must be taken by the Contractor, compiled electronically, indexed and handed over to the Engineer before construction commences.

The Contractor shall submit a programme of work to the Engineer/Municipality not later than 14 (fourteen) days after the Contractor has been notified of the acceptance of his tender. This programme must take into account, and allow for phased completion of the work. The Engineer may instruct the Contractor to stop construction work at any stage and time, as may be dictated by financial constraints highlighted by the Clients Cost Control Programme.

If necessary, the Engineer may instruct the Contractor to adjust his programme to suit other activities.

The programme shall not be in the form of a bar chart only, but shall clearly show the anticipated quantities, the production rates and value of work to be performed each month.

A network-based programme according to the precedence method shall also be provided showing the various activities and critical path in such detail as may be required by the Engineer. The programme shall be updated monthly in accordance with the progress made by the Contractor.

Failure to comply with these requirements will entitle the Engineer to use a programme based on his own assumptions for the purpose of evaluating claims for extension of time or additional payments.

If the programme submitted by the Contractor in terms of Clause 15 of the General Conditions of Contract, has to be revised because the Contractor is falling behind in his programme, he shall submit a revised programme of how he intends to regain lost time to ensure completion of the Works within the period defined in Clause 45 of the General Conditions of Contract or within a granted extension of time. A proposal to increase the tempo of work must incorporate positive steps to increase production either by more labour and plant on the site, or by using the available labour and plant in a more efficient manner.

Failure on the part of the Contractor to submit or to work according to the programme or revised programmes shall be sufficient reason for the Engineer to take steps as set out in Clause 58 of the General Conditions of Contract.

The approval by the Engineer of a programme shall have no contractual significance other than the Engineer will be satisfied if the work is carried out according to the programme. The said approval shall not limit the right of the Engineer to instruct the Contractor to vary the programme if necessary. The Contractor shall allow for the effect of normal rainfall and special non-working days in his programme.

(CRITICAL PATH MUST BE INDICATED ON PROGRAMME)

PS 2: SITE FACILITIES AVAILABLE

PS 2.1: Camp site

The Contractor shall negotiate with property owners and make his own arrangements to obtain sites for the erection of offices, laboratories, yards, etc. Written approval must be obtained from the owners on whose property the camp is to be situated. The choice of all sites for the establishment of camps is subject to the approval of the Engineer. Campsites within the road reserve will not be permitted.

PS 2.2: Water, electricity and sewage

The Contractor shall make his own arrangements concerning the supply of electrical power, water, telephone and all other services, both for use at the site establishment area as well as for the use in the construction of the Works. No direct payment shall be made for the provision of any service and the cost thereof shall be deemed to be included in the rates tendered for the various items of work for which these services are required.

PS 2.3: Rain gauge

The contractor must set up his own rainfall gauge. This item is included in the Schedule of Quantities under other fixed-charge obligations.

PS 3: SITE FACILITIES REQUIRED

PS 3.1: Facilities for the Engineer

No separate office is required for the Engineer's representative but the Contractor must provide a table, a chair and a plan cupboard in one of his offices for the exclusive use of the Engineer's representative. The Engineer's representative shall be allowed free use of the Contractor's facilities. The Engineer's representative shall be allowed free use of survey equipment and survey assistants to carry out control work as and when required.

PS 3.2: Equipment for Engineering staff

The Contractor shall allow for providing the following protective clothing for the engineering staff:

- 2 high visibility vests
- 2 hard hats (white)
- 2 Sets of safety boots

The contractor shall supply the Engineer with a Business cell phone and be responsible for the monthly running cost, and other cost relating to the use of the cell phone.

Office facilities shall be provided by the Contractor as described by Colto Specification.

PS 3.3: Water, electricity and sewage

The Contractor shall, at his own expense, be responsible for obtaining and distributing the water and electricity required for construction and domestic use. The distribution of water and electricity shall be carried out in accordance with the applicable laws and regulations.

No separate payment will be made for obtaining and distributing water and electricity, the cost of which will be deemed to be included in the tendered rates.

PS 3.4: Site instruction book

A triplicate book shall be provided by the Contractor to be used for site instructions. It shall at

all times be kept on the site.

PS 4: FEATURES REQUIRING SPECIAL ATTENTION

PS 4.1: Access to properties

The Contractor shall organize the work in such a manner as to cause the least possible inconvenience to the public and to the property owners adjacent to or affected by the work included in this contract.

If, as a result of restricted road reserve widths and the nature of the works, the construction of bypasses is not feasible, construction shall be carried out under traffic conditions in order to provide access to the erven and properties.

The Contractor may, with the approval of the Engineer, make arrangements with the occupiers of the affected erven and properties to close off a portion of a street, road, footpath or entrance temporarily, provided the Contractor duly notifies the occupiers of the intended closure and its probable duration and shall, as punctually as possible, re-open the route at the prescribed time. Where possible, the road shall be made safe and re-opened to traffic overnight. Any such closure shall be made by arrangement between the Contractor and the occupiers and shall not absolve the Contractor from his obligations under the contract to provide access at all times. Barricades, traffic signs and drums shall be provided by the Contractor to suit the specific conditions. The Contractor shall also comply with all the requirements of the Local Authority with regard to safety, signage and notices to the public.

PS 4.2: Existing residential areas

Access to the adjacent residential areas shall be maintained at all times, as shall access to individual houses.

Electricity and water supply interruptions to existing residential areas shall be kept to a minimum. Whenever it is necessary to interrupt these supplies, the Engineer's approval shall first be obtained. The affected residents shall then be notified in writing at least 3 days, but not more than 5 days in advance. Supplies shall be normalized by 16:00 on the same day.

Cognisance shall be taken by the Contractor of the possibility of residents from the adjacent residential areas having access, whether authorized or not, to the works. It is strongly emphasized that under no circumstances shall any claims be considered for delays or disruptions as a result of the presence of residents from the adjacent occupied areas.

PS 4.3: Facilities to other Contractors

In addition to the requirements of clause 21 of the general conditions of contract, the Contractor must make allowance for the presence of other Contractors engaged on other contracts on the site, which may involve, inter alia, the adoption of his programme to fit in with work to be done by the other Contractors, as well as assuring other Contractors access to their sites along prescribed routes which may fall within the site of this contract.

PS 4.4: Contractor's vehicles

All equipment and vehicles used by the Contractor shall be roadworthy at all times and all drivers and operators shall be in possession of valid drivers' licences.

PS 4.5: Site maintenance

During the progress of the work and upon its completion, the site of the works shall be kept and left in a clean and orderly condition. The Contractor shall at all times store materials and equipment for which he is responsible in an orderly manner, and shall keep the site free from debris and obstruction. Workers shall lunch or have tea breaks only in a designated area with

approved refuse and toilet facilities.

No open fires shall be permitted on the site.

Vehicles and workers must adhere to property demarcated access routes and not take or make short cuts.

PS 4.6: Testing and quality control

The Contractor shall engage the services of an approved independent testing laboratory for the testing of materials and the quality testing of layer works, to ensure that his work conforms to the specifications.

No separate payment will be made for such testing by an approved independent laboratory, the costs of which will be deemed to be included in the Contractor's tendered rates for the various items of work requiring testing in accordance with the specifications.

Certificates shall be submitted to the Engineer for all materials and equipment included in the works, where applicable.

PS 4.7: Subcontractors

The Contractor is responsible for work carried out on his behalf by subcontractors. The Engineer will not liaise directly with such subcontractors, and all problems relating to payments, programming, workmanship, etc, shall be the concern of the Contractor and the subcontractor, and the Engineer will not be involved.

PS 4.8: Existing Services

Before the Contractor commences operations, he must discuss with and have the approval of the Employer, authority or owner concerned regarding the method he proposes to use for relocating or safe-guarding any services and existing works he may encounter during construction.

The positions of existing services shown on the Drawings are given in good faith and no guarantee can be given that:

- (a) These services actually are in the approximate positions indicated.
- (b) That these are the only services in the vicinity, and
- (c) That the nature and description of these services are correct.

The Contractor shall be responsible to locate and safeguard any existing service or works he may encounter during construction and shall obtain clearance from the Employer, authority and the Engineer before commencing work in the proximity of existing services or works.

The Contractor shall be responsible for any damage to such existing services and works in the execution of this contract and shall reimburse the Employer, authority or the owner concerned for any repairs required and for damages.

The Contractor shall be responsible for immediately notifying the Engineer and the authorities concerned regarding any damage caused to public services and existing works.

Any alteration to public services shall be carried out by the Authority concerned unless the Contractor is instructed otherwise.

The Contractor shall provide the necessary assistance during any operations necessary in connection with the removal, alteration or safe-guarding of any public service.

1. PS 4.9 Safety

The Contractor shall apply suitable proven methods for construction so that his activities will not constitute a hazard to the public or any adjacent property. All excavations shall be suitably safeguarded and barricaded especially during night time, weekends or holidays and any other day of inactivity by the Contractor.

PS 5: INFORMATION SUPPLIED BY EMPLOYER

Certain information contained in these contract documents, or provided separately, is being offered in good faith. However, in the circumstances pertaining to the type of information supplied, no guarantee can be given that all the information is necessarily correct or representative. More specifically this applies to all material surveys and reports and similar information, the accuracy of which is necessarily subject to the limitation of testing, sampling, the natural variation of material or formations being investigated and the measure of confidence with which conclusions can be drawn from any investigations carried out. It also applies to the positions of existing services as indicated on the drawings.

The Employer accepts no liability for the correctness or otherwise of the information supplied or for any resulting damages, whether direct or consequential, should it prove during the course of the contract that the information supplied is either incorrect or not representative. Any reliance placed by the tenderer on this information shall be at his own risk.

PS 6: EXTENSION OF TIME ARISING FROM ABNORMAL RAINFALL

If abnormal rainfall or wet conditions occur during the course of the Contract, the Employer may grant an extension of time in accordance with Clause 45 of the General Conditions of Contract, calculated in accordance with the formula given below for each calendar month or part thereof:

$$V = (Nw - Nn) + (Rw - Rn)/X$$

If V is negative and its absolute value exceeds Nn, then V shall be taken as equal to minus Nn.

The symbols shall have the following meanings:

V = Extension of time in calendar days for the calendar month under consideration. When the value of V for any month exceeds the number of days in the particular month, V will be the number of days in the month.

Nw = Actual number of days in the calendar month on which a rainfall of Y mm or more were recorded.

Nn = Average number of days, derived from existing rainfall records, on which a rainfall of Y mm or more were recorded for the calendar month.

Rw = Actual rainfall in mm recorded on the Site in an approved rain gauge for the calendar month under consideration.

Rn = Average rainfall in mm for the calendar month, derived from existing rainfall records.

The total extension of time is the algebraic sum of all the monthly totals for the period under consideration, but if the total is negative, the time for completion will not be reduced on account of subnormal rainfall. Extensions of time for part of a month will be calculated by using pro rata values for Nn and Rn.

The factor $(N_w - N_n)$ is considered a fair allowance for variations from the average number of days during which the rainfall exceeds Y mm.

The factor $(R_w - R_n)/X$ is considered a fair allowance for variations from the average number of days during which the rainfall did not exceed Y mm but wet conditions prevented or disrupted work.

The average rainfall record for the past 10 years at the nearest rainfall station shall be for the purposes of this Contract are taken as normal rainfall. R_n and N_n for this period shall be used and the values of X and Y are 20 and 10 respectively.

PS 7: CERTIFICATES OF PAYMENT

It was agreed that the master copy of the payment certificates would be drawn up and processed by the Contractor. All costs to this effect, as well as reproduction costs shall be to the account of the Contractor. It was agreed that the first month's certificate will be evaluated and if in order, the same format will be used throughout the contract.

PS 8: CONSTRUCTION IN LIMITED AREAS

In certain cases working space may be limited. The method of construction in these restricted areas will depend largely on the Contractor's plant. However, the Contractor must note that measurement and payment will be according to the specified cross-sections and dimensions irrespective of the method used to achieve these cross-sections and dimensions, and that the rates and prices tendered shall be deemed to include full compensation for any difficulty encountered while working in limited areas and narrow widths, and that no extra payment will be made, nor will any claim for payment due to these difficulties be considered.

PS 9: NON-WORKING DAYS

The Contractor shall not work on Sundays or on the following statutory Public Holidays: New Years Day, Human Rights Day, Good Friday, Family Day, Freedom Day, Workers Day, Youth Day, National Women's Day, Heritage Day, Day of Reconciliation, Christmas Day and Day of Goodwill. Whenever any of the above statutory Public Holidays fall on a Sunday, the following Monday shall be a Public Holiday.

PS 10: SPOIL MATERIAL

No indiscriminate spoiling of material will be allowed. All surplus or unsuitable material shall be spoiled in designated areas as directed by the Engineer. Spoiling shall comply with the applicable statutory and municipal regulations.

PS 11: DRAWINGS

All "as built" information, as listed below, must be submitted to the Engineer's Representative before a certificate of completion will be issued. No separate payment will be made for the "as built" drawings

List of "as built" information required

- (a) Exact coordinates or chainage on the road centre line of each duct road crossing for electrical and irrigation services.
- (b) Exact coordinates and invert levels of all stormwater manholes, culverts and kerb inlets.
- (c) Exact coordinates and invert levels of all construction work

A Registered Land Surveyor shall be required to provide the above information.

Only figured dimensions shall be used and drawings shall not be scaled unless so instructed by the Engineer.

The Engineer will supply any figured dimensions which may have been omitted from the drawings.

PS 12: LENGTH OF TRENCHES

Where no limitations are imposed by construction stages and unless otherwise permitted in writing by the Engineer, not more than 200 m of trench in any one place shall be opened in advance of pipe laying operations.

No trench may be left open over the builders' holidays.

PS 13: SAMPLES

The Contractor shall at his own cost, supply all samples that may be required. Material or work not conforming to the approved samples shall be rejected. The Engineer reserves to himself the right to submit samples to any tests to ensure that the material represented by the sample conforms to the requirements of the specifications. The cost of all tests failed shall be for the Contractor's account.

PS 14: MANUFACTURER'S INSTRUCTIONS

The recommendations of the manufacturers of patented materials must be strictly adhered to regarding the use, mixing, application, fastening, etc. thereof except when otherwise instructed in writing by the Engineer.

PS 15: MATERIALS AND PLANT

The contractor, when using materials that are required to comply with any standard specification, shall, if so ordered, furnish the engineer with certificates of compliance.

Where so specified, materials shall bear the official mark of the appropriate authority. Samples ordered or specified shall be delivered to the engineer's office on the site free of charge.

Where proprietary products have been specified, similar products may be used subject to the prior written approval of the engineer.

Unless otherwise specified, all proprietary materials shall be used and placed in strict accordance with the relevant manufacturer's current published instructions.

Unless anything to the contrary is specified, all manufactured articles or materials supplied by the contractor for the permanent works shall be unused.

Existing structures on the site shall remain the property of the employer and except as and to the extent required elsewhere in the contract, shall not be interfered with by the contractor in any way.

Materials to be included in the works shall not be damaged in any way and, should they be damaged on delivery or by the contractor during handling, transportation, storage, installation or testing they shall be replaced by the contractor at his own expense.

All places where materials are being manufactured or obtained for use in the works, and all the processes in their entirety connected therewith shall be open to inspection by the engineer (or other persons authorised by the engineer) at all reasonable times, and the engineer shall be at liberty to suspend any portion of work which is not being executed in conformity with

these specifications.

The contractor shall satisfy himself that any quarry selected for use provides the necessary mined material in accordance with the specification.

PS 16: NOTICES, SIGNS, BARRICADES AND ADVERTISEMENTS

The Contractor shall erect the necessary signs, notices and barricades for the duration of the contract in order to safeguard both the works and the public.

Notices, signs and barricades as well as advertisements may be used only upon approval by the Engineer, and the Contractor shall be responsible for their supply, erection, maintenance and ultimate removal and shall make provision for this in his tendered rates.

The Engineer shall have the right to have any sign, notice or advertisement moved to another position or to have it removed from the site of the works, should it in any way prove to be unsatisfactory, inconvenient or dangerous to the general public.

Such notices, signs and barricades shall be provided and erected at the Contractor's own expense.

The standard name board of the South African Association of Consulting Engineers is specified. The cost of which shall be included in the rates tendered for items 1300 (Colto) of the Schedule of Quantities.

PS 17: SETTING OUT OF WORK

Reference and level beacons will be shown to the Contractor by the Engineer at the commencement of the Contract and the Contractor will be responsible for transferring the data to the Site of Works.

The Contractor shall check the condition and accuracy of all reference and level beacons and satisfy himself that they have not been disturbed and are true with regard to position and level. A beacon that has been disturbed shall not be used until its true position and level have been re-established and the new values have been certified by the Engineer. The Contractor shall thereafter be held entirely responsible for the protection of all reference and level beacons.

The Contractor shall employ a capable surveyor to set out the Works to the required lines and levels. The Engineer shall be informed immediately should any discrepancy be discovered between the levels or dimensions obtained by the Contractor and those shown on the drawings.

Where a beacon is likely to be disturbed during construction operations, the Contractor shall establish suitable reference beacons at locations where they will not be disturbed during construction. No beacons shall be covered over, disturbed or destroyed before accurate reference beacons have been established and details of the positions and levels of such beacons have been submitted to the Engineer. The Contractor's reference beacons shall be of at least the same accuracy and sturdiness of construction as the existing beacons.

The Contractor shall submit the method of setting out he proposes to employ to the Engineer. Accurate control of line and level shall be provided by the Contractor at all stages of construction.

Work set out by the Contractor may be checked by the Engineer and any errors found shall be rectified by the Contractor at his own expense. The Contractor shall supply any instrument, equipment, material and labour required by the Engineer for this survey work. Any assistance, including checking given to the Contractor by the Engineer or any setting out done by the Engineer for Contractor shall not be held as relieving the Contractor of his responsibility for the accurate construction of the Works.

The Contractor's survey instruments and survey equipment shall be suitable for the accurate setting out of the Works and shall be subject to the approval of the Engineer. They shall furthermore be checked and correctly adjusted by the authorized agents before the commencement of the contract and subsequently when required by the Engineer and when otherwise necessary.

When required the Contractor shall, at his own expense, provide two labourers to assist the Engineer. The Engineer shall have the sole right of approving of such a labourer.

Survey work shall not be measured and paid for directly and compensation for the work involved in setting out shall be deemed to be covered by the rates tendered and paid for the various items of work included under the contract.

PS 18: WORKMANSHIP AND QUALITY CONTROL

The onus to produce work which conforms in quality and accuracy of detail to the requirements of the Specifications and Drawings rests with the Contractor, and the Contractor shall, at his own expense, institute a quality-control system and provide experienced Engineers, foremen, surveyors, materials technicians, other technicians and technical staff, together with all transport, instruments and equipment, to ensure adequate supervision and positive control of the works at all times.

The costs of all supervision and process control, including testing thus carried out by the Contractor shall be deemed to be included in the rates tendered for the related items of work.

The Contractor's attention is drawn to the provisions of the various standardized specifications regarding the minimum frequency of testing that will be required for process control. The Contractor shall, at his own discretion, increase this frequency where necessary to ensure adequate control.

On completion of every part of the work and submission thereof to the Engineer for examination, the Contractor shall furnish the Engineer with the results of all relevant tests, measurements and levels to indicate compliance with the specifications.

PS 19: TRANSPORT OF MATERIAL

All costs of transporting material, including overhaul, shall be included in the applicable tendered rates. All references in the specifications to transport, overhaul and haul distances shall be deleted irrespective of whether or not the deletion is included in these project specifications.

PS 20: LIAISON WITH LOCAL AUTHORITIES

The Contractor will have to liaise with local authorities regarding the following matters:

- (a) Dealing with traffic.
- (b) Locating of existing underground services.
- (c) Protection of existing services during construction.

All the relevant authorities were notified of above operations. It is then the Contractor's onus to immediately contact all these authorities and to accommodate their involvement in his programme of work. The Contractor should also warn the authorities at least 48 hours before the actual work commences. Compensation for delays, losses or accidents will not be considered should the Contractor at any time have failed to keep the local authorities informed.

The Engineer or Employer must immediately be notified, should the Contractor experience any problem regarding work which involve a local authority.

PS 21 LOCAL LABOUR AND LOCAL SUBCONTRACTORS

PS 21.1 Introduction

It is envisaged that the works will be constructed by one Contractor employing local labour to construct the work applying the principles of the Expanded Public Works Programme (EPWP).

PS 21.2 Workload

The Contractor is required to execute certain components of this contract with labour-based construction methods as described in relevant sections.

PS 21.3 Assisting ABE's

The Contractor is required to assist ABE's in accordance with the Contractors proposal included in his/her tender.

PS 21.4 Local Labour

It is the intention that this Contract should make maximum use of the local labour force that is presently under-employed. To this end the Contractor is expected to limit non-local employees to key personnel only and to employ and train local labour on this Contract.

The Contractor shall complete the form: Annexure F and state how many non-local key personnel he intends to employ in the various categories. The numbers stated on the above-mentioned form will be strictly controlled during the Contract period and any increase in numbers is subject to the approval of the Employer.

A Project Steering Committee (PSC) has been formed and consists of representatives of the affected community, Ephraim Mogale Local Municipality and the Engineer. The PSC is up to date with the details of the project and appointment of all local labour must be through the PSC.

The Contractor will be required to arrange his own documentation regarding a contract for locally employed labour and must include provisions for the Occupational Health and Safety Act (1993) and the Compensation for Occupational Injuries and Diseases Act. The minimum daily wage to be paid in accordance with the Wage Bill for the geographical area shall be as stated in the Government Gazette in terms of Wage Determination for the Civil Engineering Industry.

PS 21.5 Contractors Obligations

The Contractor is to supply the Engineer with copies of the agreements between himself/herself and his/her subcontractors within twenty-one (21) days of the contract being awarded.

Should the Contractor be unable to or unwilling to:

- i) Subcontract the required Works as detailed in his/her tender document;
- ii) Submit the necessary documentation to prove that he/she is subcontracting the work as specified in paragraph PS 10.6.
- iii) Implement his/her proposed training scheme or any other scheme agreed to by the relevant parties;

The Municipality reserves the right to:

- a) Nullify the said contract and re-issue it to tender;
- b) Nominate available local subcontractors for the required Works;
- c) Deduct payment from the monthly certificates, the value of which will be calculated as follows:

- X = Y - Z
 X = Amount of deduction from the monthly certificate
 Y = Value of the work that should have been undertaken by the subcontractor during the month
 Z = Value of the work actually undertaken by the Subcontractor during the month;
 (d) = Nominate agents to undertake the proposed training at the expense of the Contractor.

PS 21.6 Work considered to be Labour Based

It is a condition of this contract that the following components of work must be executed using labour based construction methods.

- 1) Excavation of soft/ intermediate / hard material in pipe trenches not deeper than 1,2 m if the uninterrupted trench length of soft material is greater than 50 m, and the total depth of the trench consists of soft material.
- 2) Excavation of soft/ intermediate/ hard material in all pipe trenches for erf connections with no limitations.
- 3) Preparation of pipe bedding.
- 4) Laying and jointing of all pipes with a nominal diameter smaller than 230mm:
- 5) Backfilling of all trenches with compaction excluded.
- 6) Placing of concrete for anchor blocks and toilet foundations.
- 7) Brickwork in toilet structures.
- 8) Basic plumbing installation in toilets.
- 9) All earthworks required for foundations of toilet structures.
- 10) Precast concrete roof slabs for toilets, excluding erection.
- 11) Location of existing services.

Note:

The abovementioned work must either be done by local labourers employed by the Contractor or by local subcontractors. In the Schedule of Quantities, as an alternative to machine excavation, the cost of a compulsory labour based construction activity is covered by using the standard Colto payment item (where applicable). Site conditions and material present will dictate the application of labour-based trench excavation or machine excavation. A prerequisite for payment of these labour-based excavation items is that the Contractor keeps daily written records with names of labourers, tasks completed, man-hours spent and payments made.

Items excluded from labour based items:

- 1) Excavation in Boulders and rock material - Mechanical excavators and blasting allowed.
- 2) Compaction of bedding and backfilling - Rollers and plate compactors allowed.
- 3) Transport of materials LDV, dumpers and other transport equipment allowed.
- 4) Mixing of concrete - Mechanical mixers allowed.
- 5) Vibration of concrete - Vibrators compulsory.
- 6) Precast concrete manholes.

PS 22 TRAINING SCHEMES

Certain members of the Contractors staff will be selected from the locally recruited employees, to be subjected to training in tasks related to the execution of the contract.

The PSC will select the trainees and decide upon the specific training for each of them. The Contractor must guide PSC in this regard and make all the necessary arrangements with the training institution and the trainees, to ensure that the process runs smoothly. All other costs, including transport of trainees, will be borne by the Contractor and is deemed to be included in the P & G.

PS 23 PRESCRIPTIONS IN RESPECT OF EXISTING SERVICES

The scope of works for this contract could be affected by existing services. Where necessary the contractor must familiarize himself with the position and extent of existing services and to carry out the works in such a manner as not to cause damage to existing services.

PS 23.1 Water and Storm Water Services

All manhole covers in the road must be clearly referenced and absolutely no surfacing shall be allowed on any manhole cover.

Any cost of repairs, replacement and/or installation of services and equipment resulting from the contractor's negligence or unauthorized action shall be to the contractor's account.

PS 23.2 Electrical Services

The following procedures will apply:

1. The Contractor will in all instances submit construction drawings to the Electricity Supply Authority (ESA) for comments and for ESA to indicate known electrical services. These drawings will in all instances be available on site during the construction period or in the possession of the supervisor of the construction workers.
2. The cable's precise position on the terrain, with reference to the approximate position as indicated on the drawing, must be confirmed on terrain by means of cable tracing equipment to be supplied or arranged by the Contractor for this purpose. In the case of primary cables (11 kV and 33kV) as indicated on the drawings, it is essential that cable tracing be conducted by ESA. The Contractor will provide sufficient white lime to mark the cable on the ground. The contact persons and telephone numbers for cable tracing personnel shall be obtained from ESA by the Contractor.
3. The Contractor must thereafter, very carefully, open up the cable by hand on at least two places, of which the in between distances will not exceed 50 meters.
4. At any position, between any two points of the exposed cable as described in 1.3 above, that cable shall be identified as a known service if it lays within 0,5 meters of a straight line drawn between these two points
5. If the cable lays further than 0,5 meters away from a straight line drawn between the two exposed points, it shall be identified as an unknown service.
6. With reference to the approximate position of cables on the drawing, the Contractor will be responsible for confirming the location of such cables on terrain by means of the equipment referred to in 1.2 above, and by careful digging by hand. If the exact position of the cables cannot be determined without doubt, ESA can be approached for help.
7. When existing electrical cables fall within the excavation area of the new service, the Contractor will be responsible for protecting and supporting such cable. During backfilling of the trench, the Contractor will ensure that the cable is not damaged and repositioned at the original position and depth with the necessary bedding and marker tape.
8. Before any exposed cables are backfilled, such cables shall be inspected for possible damage by the terrain agent, in the presence of the Engineer or his/her representative. A complete record of all positions where cables were exposed must

be indicated on the drawing.

9. The Contractor is responsible for keeping a complete record of incidents where electrical cables (known or unknown) were damaged that includes the following:
 - Date when damaged and the reason
 - Date when repaired
 - The extent of repairs, for instance cable size, number of joints necessary, the length of cable replaced etc
 - The exact cable position and depth indicated on the plan
10. The Engineer's representative must check these records. The above-mentioned record will be an annexure to the minutes of the monthly site meetings. All repairs of damaged cables (known or unknown) will be conducted by ESA. The account for repairs done on known services (cables) will be delivered to the Contractor via the Engineer. On the basis of accounts delivered monthly by ESA, the repair cost of a known service (electrical cable) that was damaged, will be recovered from the Contractor's certificate.
11. 33 kV Cables
In no instances will any Contractor be allowed to expose cover 33kV cables or excavate closer to 500mm (by hand) and 2000 mm (mechanical excavation) from the centre of a 33 kV cable. ESA will do the required excavation for the Contractor's account.
12. Overhead Services
Excavation and backfill shall be such that no foundation of overhead structures (power lines, streetlights, high mast lights, stays etc.,) will be disturbed. If disturbed, the Contractor will inform ESA in writing and will reinstate the foundation to its original state.
13. Maintenance Period
During the maintenance period the Contractor's responsibility shall include:
All electrical cables that were exposed or handled by him
Excavations in the vicinity of poles and stays, at the time of the construction activities

This makes provision for instances where damaged cables were covered up without informing ESA that may cause many problems later on. The Contractor is responsible to repair all disturbed pole and stay foundations and to reinstate it to its original condition (electrical and structural), as they are disturbed.

SECTION EMP: ENVIRONMENTAL MANAGEMENT SPECIFICATION

EMP.1 General

In order to ensure that the construction works is carried out in an environmentally sensitive matter, strict compliance to the Environmental Management Plan (EMP) guidelines is required. The EMP is bounded to this document under Part C4: **Site Information**. The purpose of the EMP is to:

- Encourage good management practices through planning and commitment to environmental issues,
- Provide rational and practical environmental guidelines to:
 - i. Minimize disturbance of the natural environment,
 - ii. Prevent pollution of land, air and water,
 - iii. Prevent soil erosion and facilitate re-vegetation.
- Adopt the best practicable means available to prevent or minimize adverse

- environmental impact,
- Develop waste management practices based on prevention, minimization, recycling, treatment or disposal of wastes,
- Train employees and contractors with regard to environmental obligations.

EMP.2 Training and Induction of Employees

- The Contractor has a responsibility to ensure that all those people involved in the project are aware of and familiar with the environmental requirements for the project (this includes sub-contractors, casual labour, etc.). The EMP shall be part of the terms of reference for all contractors, sub-contractors and suppliers.

EMP.3 Complaints Register and Environmental Incident Book

Any complaints received by the project team from the public will be recorded. The complaint should be brought to the attention of the site manager, who will respond.

The following information must be recorded:

- Time, date and nature of the complaint,
- Type of communication (telephone, letter etc),
- Name, contact address and telephone number of the complainant,
- Response and investigation undertaken and
- Actions taken and by whom.

All complaints received will be investigated and a response given to the complainant within 14 days.

All environmental incidents occurring on the site will be recorded. The following information will be provided:

- Time, date, location and nature of the incident,
- Actions taken and by whom.

EMP.4 Site Cleanliness and Neatness

- Location of a construction camp is to be approved by the Engineer and is to be restored to its previous condition after completion of construction.
- The construction camp should preferably be fenced with a 1.8m bonnox fence or similar approved.
- All materials, equipment, plant and vehicles must be stored within the construction camp.
- A dedicated area must be made available for construction staff to change and store their personal belongings.

EMP.5 Access

- Access to existing roads, schools, buildings, shops and residential properties must not be impeded during construction.
- Access roads utilised by the Contractor must be maintained in good condition.

EMP.6 Borrow Pits

- Mining authorizations (permits) for borrow pits must be obtained from the Department of Minerals and Energy (DME) in consultation with the Department of Water Affairs and Forestry (DWAF).
- Spoil dumps resulting from borrow pits must not interfere with any natural surface drainage.
- Borrow pits must be rehabilitated after use in accordance with the requirements of DME and DWAF.
- Borrow pits will be fenced and the necessary warning signs will be erected.

EMP.7 Dust Control / Air Quality

- Dust suppression measures must be implemented during construction by ensuring that all surfaces prone to dust generation are kept damp (e.g. use of water tanker).
- Ensure that vehicles and equipment are in good working conditions and that emissions are not excessive.

-
- Ensure that vehicles and equipment are in good working conditions and that emissions are not excessive.
- Special care must be taken in areas where the route passes close to schools and residential areas.
- The speed of construction vehicles must be reduced.

EMP.8 Fauna

- Contractor staff may not chase, catch or kill animals encountered during construction.

EMP.9 Fire Prevention and Control

- Smoking is prohibited in the vicinity of flammable substances.
- The contractor must ensure that fire-fighting equipment is available on site, particularly where flammable substances are being stored or used, and that construction staff are aware of where it is kept and how it is operated.
- Fires started for comfort (warmth) are prohibited, due to the risk of veld fires and risk to adjacent property owner's lands.

EMP.10 Grave Sites

- Gravesites in close proximity to the road must not be disturbed during construction.

EMP.11 Materials Handling and Spills Management

- Any hazardous materials to be used during construction (e.g. lime, fuel, paint, etc) are to be stored in a designated area at the campsite.
- The storage containers/facilities (including any diesel/petrol tanks) must be placed on an impermeable surface and surrounded by a bund wall, in order to ensure that accidental spillage does not pollute the environment.
- Workers must at all times be made aware of the health and safety risks associated with any hazardous substances used (e.g. smoking near fuel tanks), and must be provided with appropriate protective clothing/equipment in case of spillages or accidents.
- Ensure all staff and contractors undergo relevant training in the maintenance of equipment to prevent the accidental discharge or spill of fuel, oil, lubricants and other chemicals.
- Any spill of potentially hazardous materials must be cleaned up immediately (Potentially hazardous materials on site include paint, oil, grease, fuel, turpentine, etc).
- The area of contaminated soil or spill must be deposited into the hazardous waste container(s).
- The contractor should keep Peat, Sorb or a similar absorbent on site to clean up any spills. The absorbent must be stored in a designated area and be available for inspection.
- All spills are to be recorded in the environmental incident book.

EMP.12 Noise

- Noise generating activities must be restricted to between 07:00 and 17:00 Monday to Friday, unless otherwise approved by the appropriate competent person in consultation with adjacent landowners/affected persons.
- All equipment, vehicles and machinery must be in good working condition and be equipped with sound mufflers if necessary.
- Construction staff must be trained and made aware of not creating unnecessary noise such as hooting and shouting.

EMP.13 Pollution Control

- Soil and water pollution through usage of fuel, oil, paint, bitumen or other hazardous substances must be avoided.
- All construction vehicles are to be maintained in good working order so as to prevent soil or water pollution from oil, fuel or other leaks, and to reduce noise pollution.

EMP.14 Rivers and Streams

- During construction of bridge structures, there must be no obstruction of the water flow of rivers and streams.
- Excavated material must not be stockpiled on or near riverbanks, in order to prevent sedimentation occurring.
- Erosion control measures must be employed both during and after construction.
- No impediments to natural surface water flow, other than approved erosion control measures, must occur.

EMP.15 Safety

- Safety measures, such as detour signs, must be implemented during construction to ensure the safety of workers, pedestrians and drivers/passengers in vehicles in the vicinity of construction work.
- Special care must be taken in the vicinity of schools to ensure the safety of children wishing to cross the road under construction.
- The relevant signage (e.g. speed control signs) must be erected alongside the road during the operation phase in order to control traffic.
- Accommodation must be made for pedestrian pathways alongside the road during the construction and operation phases.

EMP.16 Soil Management

- Stormwater drainage pipes must be installed alongside the road in all areas susceptible to soil erosion.
- Erosion should be minimized by the construction of meadow drains and the planting of indigenous vegetation on the side slopes and drains to reduce flow velocity of stormwater.
- Spoil from cuts may be used in existing erosion galleys.
- Stone pitching and gabions should be constructed at pipe culvert outlets.
- Accidental spills of contaminants onto the ground e.g. oil, concrete, fuel and chemicals should be removed together with the contaminated soil.
- If necessary an absorbent such as Peat Sorb should be used the aid in cleaning up the spill. The contaminated soil should be disposed of in an appropriate container, depending on its classification.
- Servicing and re-fuelling of vehicles must only be carried out at construction camp.

EMP.17 Worker Conduct

Code of Conduct for Construction Personnel:

- Do not leave the construction site untidy and strewn with rubbish which will attract animal pests.
- Do not set fires.
- Do not cause any unnecessary, disturbing noise at the construction camp/site or at any designated worker collection/drop off points.
- Do not drive a construction-related vehicle under the influence of alcohol.
- Do not exceed the national speed limits on public roads or exceed the recommended speed limits on the site.
- Do not drive a vehicle which is generating excessive noise or gaseous pollution (noisy vehicles must be reported and repaired as soon as possible).
- Do not litter along the roadsides, including both the public and private roads.
- Do not pollute any water bodies (whether flowing or not).
- No member of the construction team is allowed to enter the areas outside the construction site.

EMP.18 Traffic Disturbances and Diversions

- Any traffic diversions must be undertaken with the approval of all relevant authorities and in accordance with all relevant legislation.
- Wherever possible, traffic diversion must only take place on existing disturbed areas and remain within the existing road reserve.
- Traffic diversion routes must be rehabilitated after use.

EMP.19 Vegetation

- Only vegetation falling directly on the route must be removed where necessary.
- Alien vegetation within the road reserve must be eradicated, and management measures must be implemented for future control of these species.
- Vegetation that has been removed from large areas (e.g. on traffic diversion routes) during construction must be replaced with indigenous vegetation after construction has been completed.

EMP.20 Waste Management

- All general, non-hazardous waste must be placed in a skip container and disposed of at a registered waste disposal site.
- The contractor is to ensure that the portable toilet facilities at the campsite are properly maintained and in working order.
- No disposal, or leakage, of sewage must occur on or near the site.
- All hazardous waste (e.g. oil, paint, empty lime bags, contaminated wash water, etc) must be stored in leak proof containers and disposed of at a registered hazardous waste disposal site.
- The contents of waste storage containers must, under no circumstances, be emptied to the surrounding area. In general, littering, discarding or burying of any materials is not allowed on site or along the route.
- Adequate waste receptacles must be available at strategic points around the construction camp and site for all domestic refuse and to minimize the occurrence of littering.
- Concrete rubble must be collected and disposed of as directed by the Project Manager.
- Each working area must be cleared of litter and building waste (e.g. rubble, wood, concrete packets etc) on completion of the day's work.
- Any spill around the container(s) should be treated as per Section EMP11 and EMP16.

SECTION OHS : OHS 1993 HEALTH AND SAFETY SPECIFICATION

OHS.1 SCOPE

This specification covers the health and safety requirements to be met by the Contractor to ensure a continued safe and healthy environment for all workers, employees and subcontractors under his control and for all other persons entering the site of works.

This specification shall be read with the Occupational Health and Safety Act (Act No 85 and amendment Act No 181) 1993, and the corresponding Construction Regulations 2014, and all other safety codes and specifications referred to in the said Construction Regulations.

In terms of the OHS Agreement in Section C1.2.4 of the Contract document, the status of the Contractor as mandatory to the Employer (client) is that of an employer in his own right, responsible to comply with all provisions of OHS 1993 and the Construction Regulations 2014.

This safety specification and the Contractor's own Safety Plan as well as the Construction Regulations 2014, shall be displayed on site or made available for inspection by all workers, employees, inspectors and any other persons entering the site of works.

The following are possible risks associated with this project:

- Working high above the ground on top and below the bridge, most of the time in a restricted environment with limited landings (working platforms)
- Working above a continuously flowing river and in an flood plain environment subject to flooding
- Lifting and lowering of materials and equipment from the ground to the bridge and vice versa, exposed to cross winds
- Steep and restricted access to the lower flood plain below the bridge
- Potentially dangerous existing services, i.e. gas lines, water and sewerage mains, electrical high voltage cables, on the bridge, buried and overhead
- Deep excavations in soils requiring shoring or reducing of slopes
- Blasting of hard rock or demolition of concrete
- High pressure during testing of the relocated pipe lines, which could result in potentially dangerous situations in the event of the pipeline or fittings failing
- Potentially harmful gasses when tying into the existing sewer mains
- Movement of construction vehicles on site, taking into consideration steep slopes, other traffic and existing services
- Exposure to possible injuries due to mishandling or failure of power and hand tools
- Falling debris, tools and materials from bridge
- Non-conformance to specifications with regards to fasteners and materials
- Risks related to general safety and security on site

Additional risks may arise from specific methods of construction selected by the Contractor which are not necessary covered in the above.

OHS.2 DEFINITIONS

For the purpose of this contract the following shall apply:

- (a) **Employer** where used in the contract documents and in this specification, means the Employer as defined in the General Conditions of Contract and it shall have the exact same meaning as **client** as defined in the Construction Regulations 2014. **Employer** and **client** is therefore interchangeable and shall be read in the context of the relevant document.
- (b) **Contractor** wherever used in the contract documents and in this specification, shall have the same meaning as **Contractor** as defined in the General Conditions of Contract.

In this specification the terms **principal contractor** and **contractor** are replaced with **Contractor** and **subcontractor** respectively.

For the purpose of this contract the **Contractor** will, in terms of OHS 1993, be the

mandatory, without derogating from his status as an employer in his own right.

- (c) “**Engineer**” where used in this specification, means the Engineer as defined in the General Conditions of Contract. In terms of the Construction Regulations the Engineer may act as agent on behalf of the Employer (the client as defined in the Construction Regulations).

OHS.3 TENDERS

The Contractor shall submit the following with his tender:

- (a) a documented Health and Safety Plan as stipulated in Regulation 7 of the Construction Regulations. The Safety Plan must be based on the Construction Regulations 2014 and will be subject to approval by the Employer;
- (b) a declaration to the effect that he has the competence and necessary resources to carry out the work safely in compliance with the Construction Regulations 2014;
- (c) a declaration to the effect that he made provision in his tender for the cost of the health and safety measures envisaged in the Construction Regulations.
- (d) Failure to submit the foregoing with his tender, will lead to the conclusion that the Contractor will not be able to carry out the work under the contract safely in accordance with the Construction Regulations.

OHS.4 NOTIFICATION OF COMMENCEMENT OF CONSTRUCTION WORK

After award of the contract, but before commencement of construction work, the Contractor shall, in terms of Regulation 4, notify the Provincial Director of the Department of Labour in writing if the following work is involved:

- (a) the demolition of structures and dismantling of fixed plant of height of 3,0m or more;
- (b) the use of explosives;
- (c) construction work that will exceed 30 days or 300 person-days;
- (e) excavation work deeper than 1,0m; or
- (f) working at a height greater than 3,0m above ground or landings.

The notification must be done in the form of the pro forma included under Section 9 (Forms to be Completed by Successful Tenderer) of the tender document.

A copy of the notification form must be kept on site, available for inspection by inspectors, Employer, Engineer, employees and persons on site.

OHS.5 RISK ASSESSMENT

Before commencement of any construction work during the construction period, the Contractor shall have a risk assessment performed and recorded in writing by a competent person. (Refer Regulation 9 of the Construction Regulations 2014).

The risk assessment shall identify and evaluate the risks and hazards that may be expected during the execution of the work under the contract, and it shall include a documented plan of safe work procedures to mitigate, reduce or control the risks and hazards identified.

The risk assessment shall be available on site for inspection by inspectors, Employer, Engineer, subcontractors, employees, trade unions and health and safety committee members, and must be monitored and reviewed periodically by the Contractor.

OHS.6 APPOINTMENT OF EMPLOYEES AND SUBCONTRACTORS

6.1 Health and Safety plan

The Contractor shall appoint his employees and any subcontractors to be employed on the contract, in writing, and he shall provide them with a copy of his documented Health and Safety Plan, or relevant sections thereof. The Contractor shall ensure that all subcontractors and employees are committed to the implementation of his Safety Plan.

6.2 Health and safety induction training

The Contractor shall ensure that all employees under his control, including subcontractors and their employees, undergo a health and safety induction training course by a competent person before commencement of construction work. No visitor or other person shall be allowed or permitted to enter the site of the works unless such person has undergone health and safety training pertaining to hazards prevalent on site.

The Contractor shall ensure that every employee on site shall at all times be in possession of proof of the health and safety induction training issued by a competent person prior to commencement of construction work.

OHS.7 APPOINTMENT OF SAFETY PERSONNEL

7.1 Construction Supervisor

The Contractor shall appoint a full-time **Construction Supervisor** with the duty of supervising the performance of the construction work.

He may also have to appoint one or more competent employees to assist the construction supervisor where justified by the scope and complexity of the works.

7.2 Construction safety officer

Taking into consideration the size of the project and the hazards or dangers that can be expected, the Contractor shall appoint in writing a full-time or part-time **Construction Safety Officer** if so decided by the Inspector of the Department of Labour. The Safety Officer shall have the necessary competence and resources to perform his duties diligently.

Provision shall be made by the Contractor in his rates, to cover the cost of this dedicated construction safety officer appointed after award of the contract.

7.3 Health and safety representatives

In terms of **Section 17 and 18 of the Act (OHSA 1993)** the Contractor, being the employer in terms of the Act for the execution of the contract, shall appoint a **health and safety representative** whenever he has more than 20 employees in his employment on the site of the works. The health and safety representative must be selected from employees who are employed in a full-time capacity at a specific workplace.

The number of health and safety representatives for a workplace shall be at least one for every 100 employees.

The function of health and safety representative(s) will be to review the effectiveness of health and safety measures, to identify potential hazards and major incidents, to examine causes of incidents (in collaboration with his employer, the Contractor), to investigate complaints by employees relating to health and safety at work, to make representations to the employer (Contractor) or inspector on general matters affecting the health and safety of employees, to inspect the workplace, plant, machinery etc. on a regular base, to participate in consultations with inspectors and to attend meetings of the health and safety committee.

7.4 Health and safety committee

In terms of **Sections 17 and 18 of the Act (OHSA 1993)** the Contractor (as employer), shall establish one or more **health and safety committee(s)** where there are two or more health and safety representatives at a workplace. The persons selected by the Contractor to serve on the committee shall be designated in writing.

The function of the health and safety committee shall be to hold meetings at regular intervals, but at least once every three months, to review the health and safety measures on the contract, to discuss incidents related to health and safety with the Contractor and the inspector, and to make recommendations regarding health and safety to the Contractor and to keep record of recommendations and reports made by the committee.

7.5 Competent persons

In accordance with the Construction Regulations the Contractor has to appoint in writing **competent persons** responsible for supervising construction work on each of the following work situations that may be expected on the site of the works.

- (a) Risk assessment and induction training as described in Regulation 9 of the Construction Regulations;
- (b) Fall protection as described in Regulation 10;
- (c) Excavation work as described in Regulation 13;
- (d) Demolition work as described in Regulation 14;
- (e) Scaffolding work as described in Regulation 16;
- (f) Suspended platform operations as described in Regulation 17;
- (g) Material hoists as described in Regulation 19;
- (h) Bulk Mixing plant operations as described in Regulation 20;
- (i) Explosive actuated fastening device as described in Regulation 21;
- (j) Cranes as described in Regulation 22;
- (k) Construction vehicle and mobile plant inspections on a daily basis by a competent person as described in Regulation 23(1);
- (l) Control of all temporary electrical installation on the construction site as described in Regulation 24;
- (m) Stacking and storage on construction sites as described in Regulation 28; and
- (n) Fire precautions on construction sites as described in Regulation 29.

A competent person may be appointed for more than one part of the construction work with the understanding that the person must be suitably qualified and able to supervise at the same time the construction work on all the work situations for which he has been appointed.

The appointment of competent persons to supervise parts of the construction work does not relieve the Contractor from any of his responsibilities to comply with **all** requirements of the Construction Regulations.

OHS.8 RECORDS AND REGISTERS

In accordance with the Construction Regulations the Contractor is bound to keep records and registers related to health and safety on site for periodic inspection by inspectors, the Engineer, the Employer, trade union officials and subcontractors and employees. The following records and registers must be kept on site and shall be available for inspection at all times.

- (a) A copy of the OHSA 1993 Construction Regulations 2014;
- (b) A copy of this Health and Safety Specification;
- (c) A copy of the Contractor's Health and Safety Plan (Regulation 7);
- (d) A copy of the Notification of Construction Work (Regulation 4);
- (e) A health and safety file in terms of Regulation 7(1b) with inputs by the Construction Safety Officer (Regulation 8(5));
- (f) A copy of the risk assessment described in Regulation 9;
- (g) A full protection plan and the corresponding records of evaluation and training of employees working from elevated positions as described in Regulation 10;
- (h) Drawings pertaining to the design of structures (Regulation 11(1c)) and temporary works (Regulation 10) must be kept on site;
- (i) Pronouncement of the safety of excavations must be recorded in a register to be kept on site (Regulation 13(2)(h));
- (j) A copy of the certificate of the system design for suspended platforms (Regulation 17(3));
- (k) A notice must be affixed around the base towers of material hoists to indicate the maximum mass load, which may be carried at any one time by material hoists (Regulation 11(2));
- (l) Maintenance records of material hoists and inspection results must be kept in a record book to be kept on site (Regulation 19(8));
- (m) A record of any repairs to or maintenance of a batch plant must be kept on site (Regulations 19(8));
- (n) A warning notice must be displayed in a conspicuous manner when and wherever an explosive powered tool is used (Regulation 21(2));
- (o) A register for recording of findings by the competent person appointed to inspect construction vehicles and mobile plant (Regulation 23(1) (k)).

OHS.9 CONTRACTORS RESPONSIBILITIES

For this contract the Contractor will be the mandatory of the Employer (Client), as defined in the Act (OHSA 1993), which means that the Contractor has the status of employer in his own right in respect of the contract. The Contractor is therefore responsible for all the duties and obligations of an employer as set out in the Act (OHSA 1993) and the Construction Regulations 2014.

Before commencement of work under the contract, the Contractor shall enter into an agreement with the Employer (Client) to confirm his status as mandatory (employer) for the contract under consideration.

The Contractor's duties and responsibilities are clearly set out in the Construction Regulations 2014, and are not repeated in detail but some important aspects are highlighted hereafter, without relieving the Contractor of any of his duties and responsibilities in terms of the Construction Regulations.

(a) Contractor's position in relation to the Employer (Client) (Regulation 5)

In accordance with Section 4 of the Regulations, the Contractor shall liaise closely with the Employer or the Engineer on behalf of the Employer, to ensure that all requirements of the Act and the Regulations are met and complied with.

(b) The Principal Contractor and Contractor (Regulation 7)

The Contractor is in terms of the definition in Regulation 2(b) the equivalent of Principle Contractor as defined in the Construction Regulations, and he shall comply with all the provisions of Regulation 7.

Any subcontractors employed by the Contractor must be appointed in writing, setting out the terms of the appointment in respect of health and safety. An independent subcontractor shall however provide and demonstrate to the Contractor a suitable, acceptable and sufficiently documented health and safety plan before commencement of the subcontract. In the absence of such a health and safety plan the subcontractor shall undertake in writing that he will comply with the Contractor's safety plan, the health and safety specifications of the Employer and the Construction Regulations 2014.

(c) Management Supervision of construction work (Regulation 8)

The Contractor shall appoint the safety and other personnel and employees as required in terms of Regulation 8 and as set out in paragraph 7 above. Appointment of those personnel and employees does not relieve the Contractor from any of the obligations under Regulation 8.

(d) Risk assessment for construction works (Regulation 9)

The Contractor shall have the risk assessment made as set out in paragraph 3 above before commencement of the work and it must be available on site for inspection at all times. The Contractor shall consult with the health and safety committee or health and safety representative(s) etc. on a regular basis to ensure that all employees, including subcontractors under his control, are informed and trained by a competent person regarding health hazards and related work procedures.

No subcontractor, employee or visitor shall be allowed to enter the site of works without prior health and safety induction training, all as specified in Regulation 9.

(e) Fall protection (Regulation 10)

Fall protection, if applicable to this contract shall comply in all respects with Regulation 10 of the Construction Regulations.

(f) Structures (Regulation 11)

The Contractor will be liable for all claims arising from collapse or failure of structures if he failed to comply with all the specifications, project specifications and drawings

related to the structures, unless it can be proved that such collapse or failure can be attributed to faulty design or insufficient design standards on which the specifications and the drawings are based.

In addition the Contractor shall comply with all aspects of Regulation 11 of the Construction Regulations.

(g) Temporary works (Regulation 12)

The Contractor will be responsible for the adequate design of all formwork and support structures by a competent person.

All drawings pertaining to formwork shall be kept on site and all equipment and materials used in formwork, shall be carefully examined and checked for suitability by a competent person.

The provisions of Regulation 12 of the Construction Regulations shall be followed in every detail.

(h) Excavation (Regulation 13)

It is essential that the Contractor shall follow the instructions and precautions in the Standard Specifications and Project Specifications as well as the provisions of the Construction Regulations to the letter as unsafe excavations can be a major hazard on any construction site. The Contractor shall therefore ensure that all excavation work is carried out under the supervision of a competent person, that inspections are carried out by a Professional Engineer or Technologist, and that all work is done in such a manner that no hazards are created by unsafe excavations and working conditions.

Supervision by a competent person will not relieve the Contractor from any of his duties and responsibilities under Regulation 13 of the Construction Regulations.

(i) Demolition work (Regulation 14)

Whenever demolition work is included in a contract, the Contractor shall comply with all the requirements of Regulation 14 of the Construction Regulations. The fact that a competent person has to be appointed by the Contractor does not relieve the Contractor from any of his responsibilities in respect of safety of demolition work.

(j) Tunneling (Regulation 15)

The Contractor shall comply with Regulation 15 wherever tunneling of any kind is involved.

(k) Scaffolding (Regulation 16)

The Contractor shall ensure that all the provisions of Regulation 16 of the Construction Regulations are complied with. [Note: Reference in the Regulations to "Section 44 of the Act" should read "Section 43 of the Act"].

(l) Suspended platforms (Regulation 17)

Wherever suspended platforms will be necessary on any contract, the Contractor shall ensure that copies of the system design issued by a Professional Engineer are submitted to the Engineer for inspection and approval. The Contractor shall appoint competent persons as supervisors and competent scaffold erectors, operators and inspectors and ensure that all work related to suspended platforms are done in accordance with Regulation 17 of the Construction Regulations.

(m) Rope Access (Regulation 18)

Where rope access are required on the construction site, the Contractor shall comply with Regulation 18.

(n) Material Hoists (Regulation 19)

Wherever applicable, the Contractor shall comply with the provisions of Regulation 19

to the letter.

(o) Bulk Mixing plants (Regulation 20)

Wherever applicable, the Contractor shall ensure that all lifting machines, lifting tackle, conveyors, etc. used in the operation of a batch plant shall comply with, and that all operators, supervisors and employees are strictly held to the provisions of Regulation 20. The Contractor shall ensure that the General Safety Regulations (Government Notice R1031 of 30 May 1986), the Driven Machinery Regulations (Government Notice R295 of 26/2/1988) and the Electrical Installation Regulations (Government Notice R2271 of 11/10/1995) are adhered to by all involved.

In terms of the Regulations, records of repairs and maintenance shall be kept on site.

(p) Explosive actuated fastening devices (Regulation 21)

The Contractor shall ensure that, wherever explosive-powered tools are required to be used, all safety provisions of Regulation 21 are complied with.

It is especially important that warning notices are displayed and that the issue and return of cartridges and spent cartridges be recorded in a register to be kept on site.

(q) Cranes (Regulation 22)

Wherever the use of tower cranes becomes necessary, the provisions of Regulation 22 shall be complied with.

(r) Construction vehicles And mobile plant (Regulation 23)

The Contractor shall ensure that all construction vehicles and plant are in good working condition and safe for use, and that they are used in accordance with their design and intended use. The vehicles and plant shall only be operated by workers or operators who have received appropriate training, all in accordance with all the requirements of Regulation 23.

All vehicles and plant must be inspected on a daily basis, prior to use, by a competent person and the findings must be recorded in a register to be kept on site.

(s) Electrical installation and machinery on construction sites (Regulation 24)

The Contractor shall comply with the Electrical Installation Regulations (Government Notice R2920 of 23 October 1992) and the Electrical Machinery Regulations (Government Notice R1953 of 12 August 1993). Before commencement of construction, the Contractor shall take adequate steps to ascertain the presence of, and guard against dangers and hazards due to electrical cables and apparatus under, over or on the site.

All temporary electrical installations on the site shall be under the control of a competent person, without relieving the Contractor of his responsibility for the health and safety of all workers and persons on site in terms of Regulation 24.

(t) Use of temporary storage of flammable liquids on construction sites (Regulation 25)

The Contractor shall comply with the provisions of the General Safety Regulations (Government Notice R1031 of 30 May 1986) and all the provisions of Regulation 25 of the Construction Regulations to ensure a safe and hazard-free environment to all workers and other persons on site.

(u) Water environments (Regulation 26)

Where construction work is done over or in close proximity to water, the provisions of Regulation 26 shall apply.

(v) Housekeeping and general safeguarding on construction sites (Regulation 27)

Housekeeping on all construction sites shall be in accordance with the provisions of the environment Regulations for workplaces (Government Notice R2281 of 16 October 1987) and all the provisions of Regulation 27 of the Construction Regulations.

(w) Stacking and storage on construction sites (Regulation 28)

The provisions for the stacking of articles contained in the General Safety Regulations (Government Notice R1031 of 30 May 1986) as well as all the provisions Regulation 28 of the Construction Regulations shall apply.

(x) Fire precautions on construction sites (Regulation 29)

The provisions of the Environmental Regulations for Workplaces (Government Notice R2281 of 16 October 1987) shall apply.

In addition the necessary precautions shall be taken to prevent the incidence of fires, to provide adequate and sufficient fire protection equipment, sirens, escape routes etc. all in accordance with Regulation 29 of the Construction Regulations.

(y) Construction welfare facilities (Regulation 30)

The Contractor shall comply with the construction site provisions as in the Facilities Regulations (Government Notice R1593 of 12 August 1988) and the provisions of Regulation 30 of the Construction Regulations.

(z) Non-compliance with the Construction Regulations 2014

The foregoing is a summary of parts of the Construction Regulations applicable to all construction projects.

The Contractor, as employer for the execution of the contract, shall ensure that all provisions of the Construction Regulations applicable to the contract under consideration are complied with to the letter.

Should the Contractor fail to comply with the provisions of the Regulations 4 to 30 as listed in Regulation 33, he will be guilty of an offence and will be liable, upon conviction, to the fines or imprisonment as set out in Regulation 33.

The Contractor is advised in his own interest to make a careful study of the Act and the Construction Regulations as ignorance of the Act and the Regulations will not be accepted in any proceedings related to non-conformance to the Act and the Regulations.

OHS.10 MEASUREMENT AND PAYMENT

10.1 Principles

It is a condition of this contract that Contractors, who submit tenders for this contract, shall make provision in their tenders for the cost of all health and safety measures during the construction process. All associated activities and expenditure are deemed to be included in the Contractor's tendered rates and prices.

(a) Safety personnel

The Construction Supervisor, the Construction Safety Officer, Health and Safety Representatives, Health and Safety Committee and Competent Persons referred to in clauses 9.1 to 9.5 shall be members of the Contractor's personnel, and no additional payment will be made for the appointment of such safety personnel.


(b) Records and Registers

The keeping of health and safety-related records and registers as described in 8 is regarded as a normal duty of the Contractor for which no additional payment will be considered, and which is deemed to be included in the Contractor's tendered rates and prices.

C4: SITE INFORMATION

The site is located at Stand number 2007, Matlerekeng. The area is administered by Ephraim Mogale Local Municipality, under the Sekhukhune District Municipality. The respective location coordinates are as shown below:

Development area	LATITUDE	LONGITUDE
Matlerekeng Sports Facility	24°58'56.2"S	29°03'21.2"E

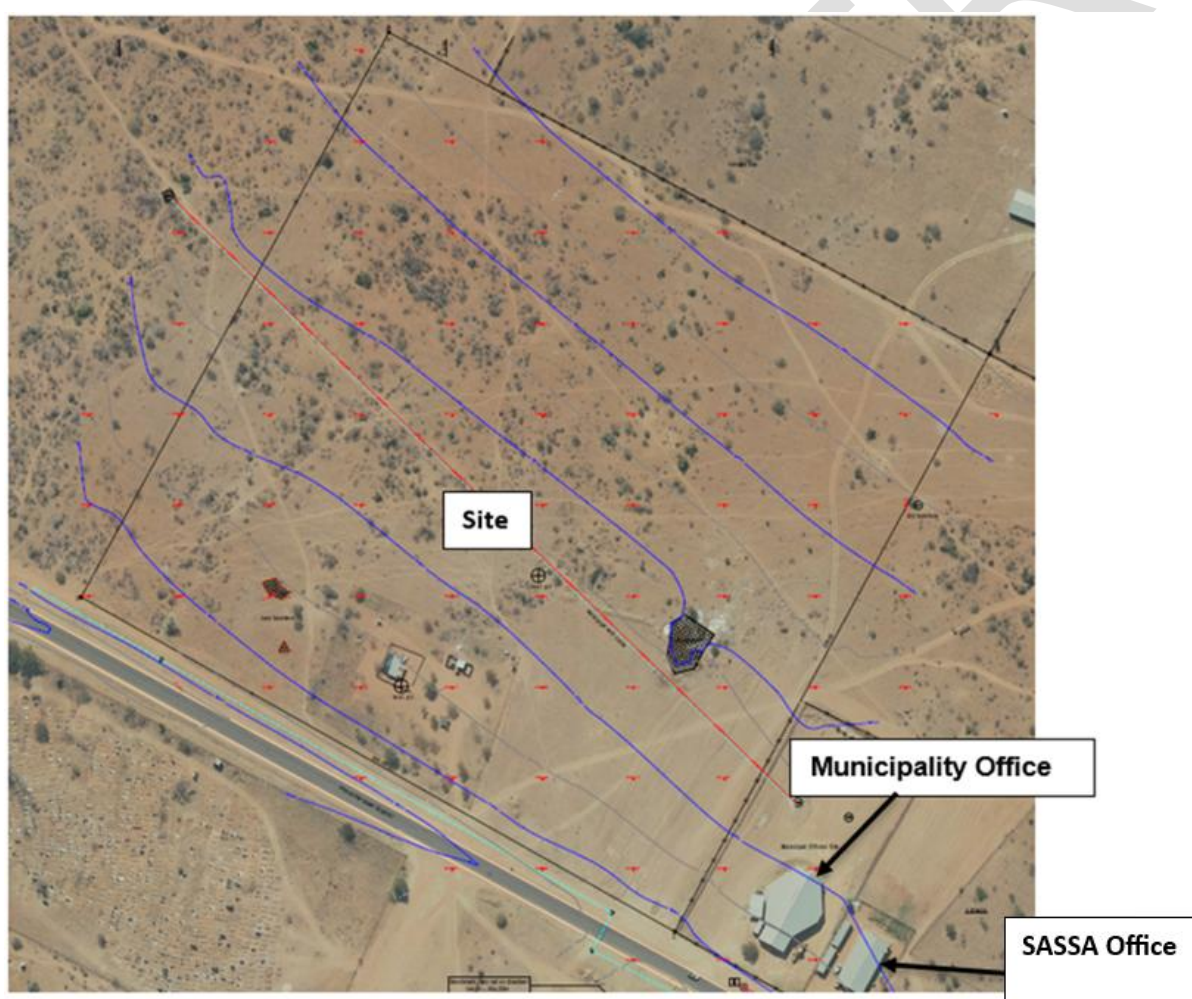

Site Location.

C4.1 TENDER DRAWINGS

C4.1 TENDER DRAWINGS

****END OF DOCUMENT****
